


SERIES AP

BINARY COUNTERS




AP-500

5/2




BINARY COUNTERS



AP-520

5/2



COILS U1



DA-0050

12 V DC

DA-0051

24 V DC

DA-0106

24V AC - 50/60 Hz

DA-0108

110V AC - 50/60 Hz

DA-0124

230V AC - 50/60 Hz

CONNECTOR FOR COILS U1




AM-5110

IP 65 protection rating. PG9 cable connection.
180° adjustable on the reel.

With indicator light on request


SERIES AM

UNIDIRECTIONAL FLOW REGULATOR M5 - G 1/8 - G 1/4 - G 3/8 - G 1/2




AM-5060

M5




AM-5061

G1/8




AM-5062

G1/8




AM-5063

G1/8




AM-5064

G1/4




AM-5065

G1/4




AM-5066

G3/8




AM-5067

G1/2




BIDIRECTIONAL FLOW REGULATORS M5 - G 1/8 - G 1/4 - G 3/8 - G 1/2




AM-5070

M5




AM-5071

G1/8




AM-5072

G1/8




AM-5074

G1/4




AM-5076

G3/8



AM-5077

G1/2




UNIDIRECTIONAL FLOW REGULATORS G 1/2 - G 3/4 - G 1




AM-5090

G1/2




AM-5091

G3/4



AM-5092

G1




SOFT-STARTER MANUAL ADJUSTMENT




AM-5240

G1/8




AM-5241

G1/4




AM-5242

G1/4



AM-5243

G3/8




SOFT-STARTER ELECTRICAL SWITCH




AM-5242E

G1/4




AM-5243E

G3/8




ENERGY SAVER



AM-5350

G1/8


Manual adjustment



AM-5351

G1/4


Manual adjustment



AM-5352

G1/4


Manual adjustment



AM-5353

G3/8


Manual adjustment



AM-5354

G1/2


Manual adjustment



AM-5355

G3/4


Manual adjustment



AM-5356

G1

Manual adjustment




SOFT-STARTER MANUAL ADJUSTMENT




AM-5254

G1/2




AM-5255

G3/4



AM-5256

G1




SOFT-STARTER ELECTRICAL SWITCH




AM-5259

G1/2




AM-5260

G3/4



AM-5261

G1




PNEUMO-ELECTRIC TRANSDUCER



AM-5200

NC - NO in base ai terminali collegati



Body made of dielectric material, wall-mounted. Protection rating IP65.

* resistive load


** inductive load

ADJUSTABLE PRESSURE SWITCH



AM-5220

NC - NO in base ai terminali collegati



Body made of dielectric material, wall-mounted. Protection rating IP65.

* resistive load

** inductive load

UNIDIRECTIONAL SHUT-OFF VALVE


AM-5500	G1/8	
AM-5501	G1/4	
AM-5502	G1/4	
AM-5503	G3/8	
AM-5504	G1/2	

BIDIRECTIONAL SHUT-OFF VALVE


AM-5510	G1/8	
AM-5511	G1/4	
AM-5512	G1/4	
AM-5513	G3/8	
AM-5514	G1/2	

CHECK VALVES


AM-5400	G1/2	
AM-5401	G3/4	
AM-5402	G1	

SIGNAL PROCESSING VALVES "AND" VALVES


AM-5160	Threaded body G1/8	
----------------	-----------------------	--



AM-5161	Push-in fittings Ø4	
----------------	---------------------	--

SIGNAL PROCESSING VALVES "OR" VALVE


AM-5162	Threaded body G1/8	
----------------	-----------------------	--



AM-5163	Push-in fittings Ø4	
----------------	---------------------	--




AM-5164	Threaded body G1/4	
----------------	-----------------------	--

TO DEPLETION

POSITIONER UNIT FOR PNEUMATIC CYLINDERS



YG-6300

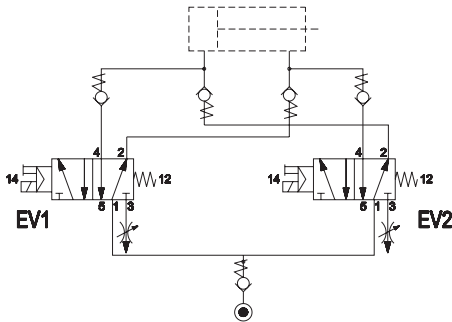

COIL U05 15 MM FASTON



	DC	AC
DD-040	-	24
DD-041	12	-
DD-051	24	-
DD-060	-	110
DD-070	-	230

CONNECTOR 15 MM



AM-5109