

COMPACT

P10 (10 mm) **P15** (15 mm) **P22** (22 mm)

HIGH FLOW RATE

UNIVER traditional spool technology

COMPACT SIZE

Highest reduction of overall dimensions

EASY INSTALLATION

All pneumatic connections on the same side

COMPLETE SOLUTION

5/2 - 5/3 - 3/2+3/2

LOW POWER CONSUMPTION

1 W (standard) 0,3 W (upon request)


NEW
up to
36 coils




P10
310
NI/min



P15
800
NI/min

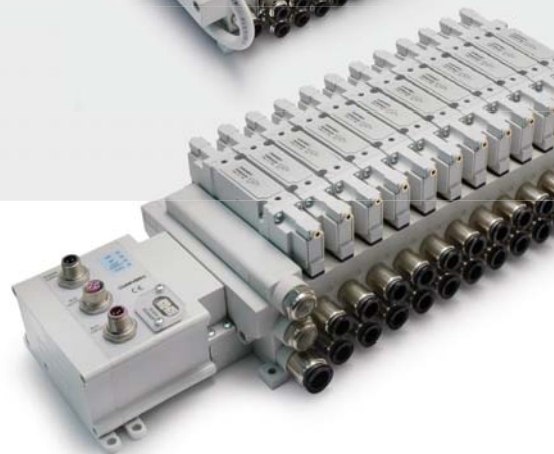

P22
1700
NI/min



TC

Serial Communication System

MODULAR

Configurable expansion modules

FLEXIBLE



High handling capacity of digital inputs and outputs

INTEGRATED

Direct connection to valve manifolds

DISTRIBUTED CONFIGURATION

Remote expansion modules for valve manifolds

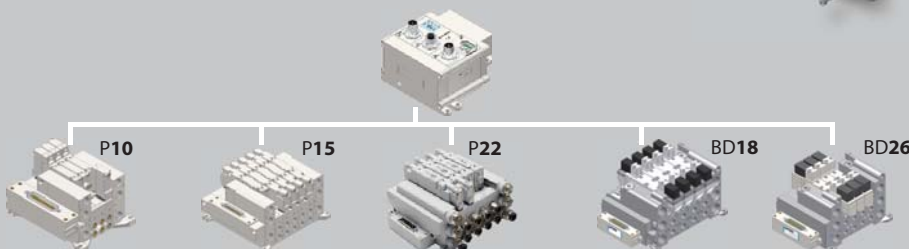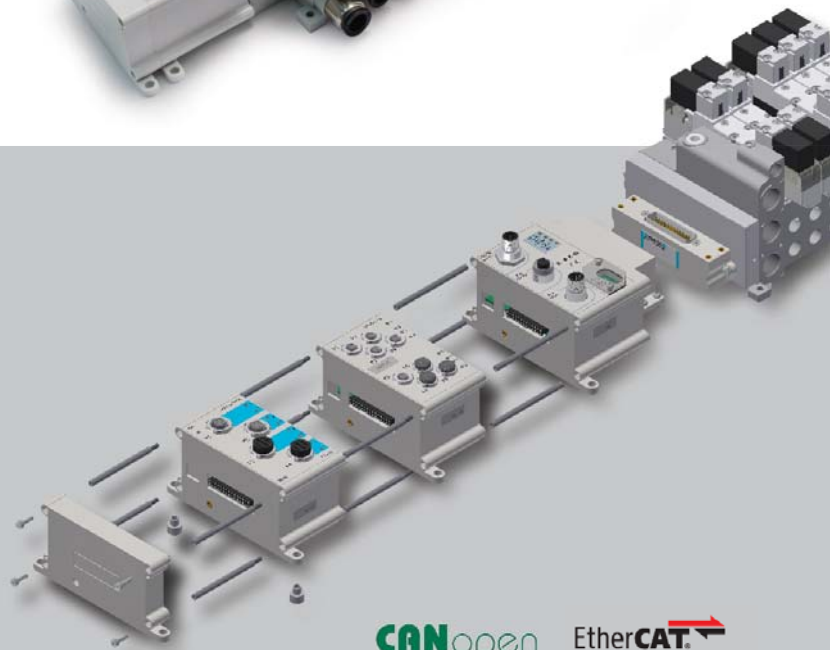

CANopen

EtherCAT[®]
Technology Group

EtherNet/IP[®]

DeviceNet[®]

PROFI[®]
BUS

PROFI[®]
NET