


# LSLG

Pin clamp with hand lever

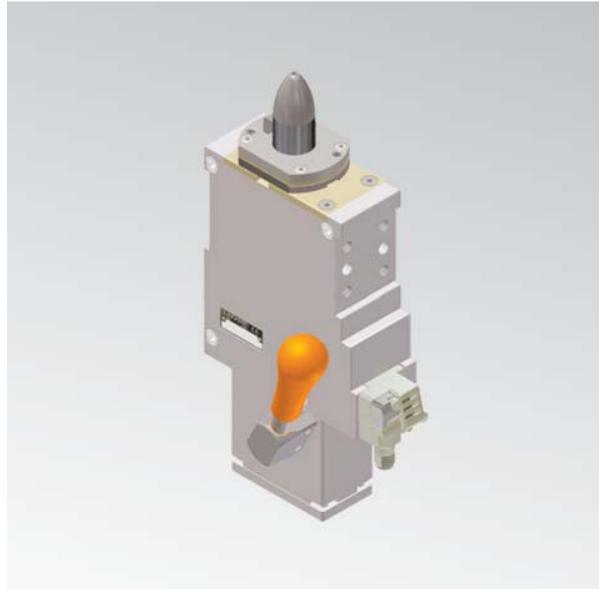


L	S	L	G	U	3	0	0	0	0	0
1	2	3	4	5	6	7	8			

<b>1 Series</b> LS = Pin clamp	<b>2 Version</b> L = With hand lever	<b>3 Model</b> G = UNIVER drawing
-----------------------------------	---	--------------------------------------


<b>4 Sensor</b> U = Electronic sensor with M12 swivel connector	<b>5 Pin diameter</b> 1 <= Ø 19 mm 2 = Ø 20 mm 3 = Ø 25 mm 4 = Ø 30 mm 5 = Ø 35 mm 6 = Ø 40 mm	<b>6 Locating pin</b> 0 = Locating pin non included 1 = Locating pin included
--	--	---

<b>7 Working height</b> 0 = Standard, others upon request	<b>8 Progressive numbering</b> Progressive numbers for special products are assigned by the Sales Dept.
--	--



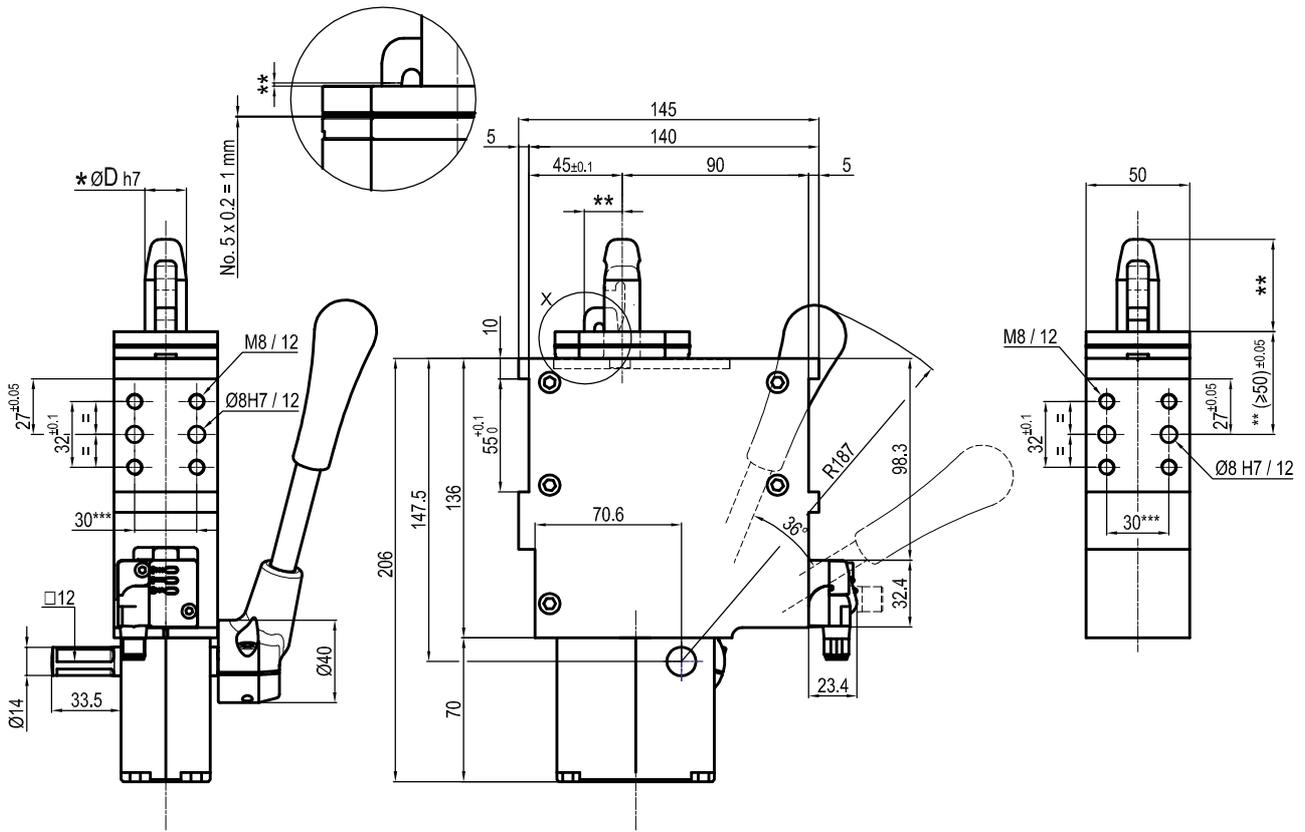

*	ØD
1	≤19
2	20
3	25
4	30
5	35
6	40

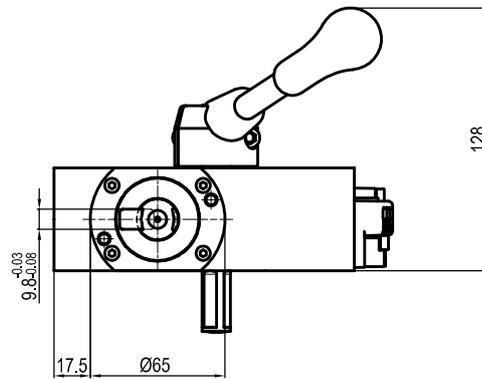

\*\* : Missing dimension to be defined according to customer specifications

Bore Ø	Clamping force	Weight (hook and pin not included)
50 mm	3500 N	3.2 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**  
 Operating temperature: **5° + 45° C**  
 Electronic sensor with M12 swivel connector that can be orientated at 0° or 90°  
 Supply voltage: 10+30 Vdc  
 IP code: **IP 54**  
 Pneumatic ports on both sides

\*\*\* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.