

UDP40



Unità di bloccaggio **UNIVERSAL** a doppio pressore



U	D	P	4	0	D	E	E
1	2	3	4	5	6		

1 Serie	2 Versione	3 Taglia
<p>UD = Unità di bloccaggio UNIVERSAL a doppio pressore con regolazione continua angolo d'apertura da: 0° a 180° max L'angolo di apertura può variare a seconda della posizione dei pressori</p>	<p>P = Pneumatica standard</p>	<p>40 = Ø 40 mm</p>

4 Caratteristiche del pressore	5 Tipo di pressore	6 Sensore di posizione
<p>D = Doppio pressore</p>	<p>A = Centrale, 10 mm offset B = Destro, 10 mm offset G = Sinistro, 10 mm offset C = Centrale, 15 mm offset D = Destro, 15 mm offset S = Sinistro, 15 mm offset E = Centrale, 45 mm offset F = Destro, 45 mm offset L = Sinistro, 45 mm offset N = Senza pressore</p>	<p>N = Senza sensore (con piastra di chiusura) E = Sensore elettronico con connettore M12 orientabile</p>

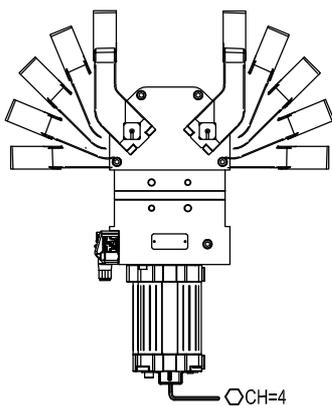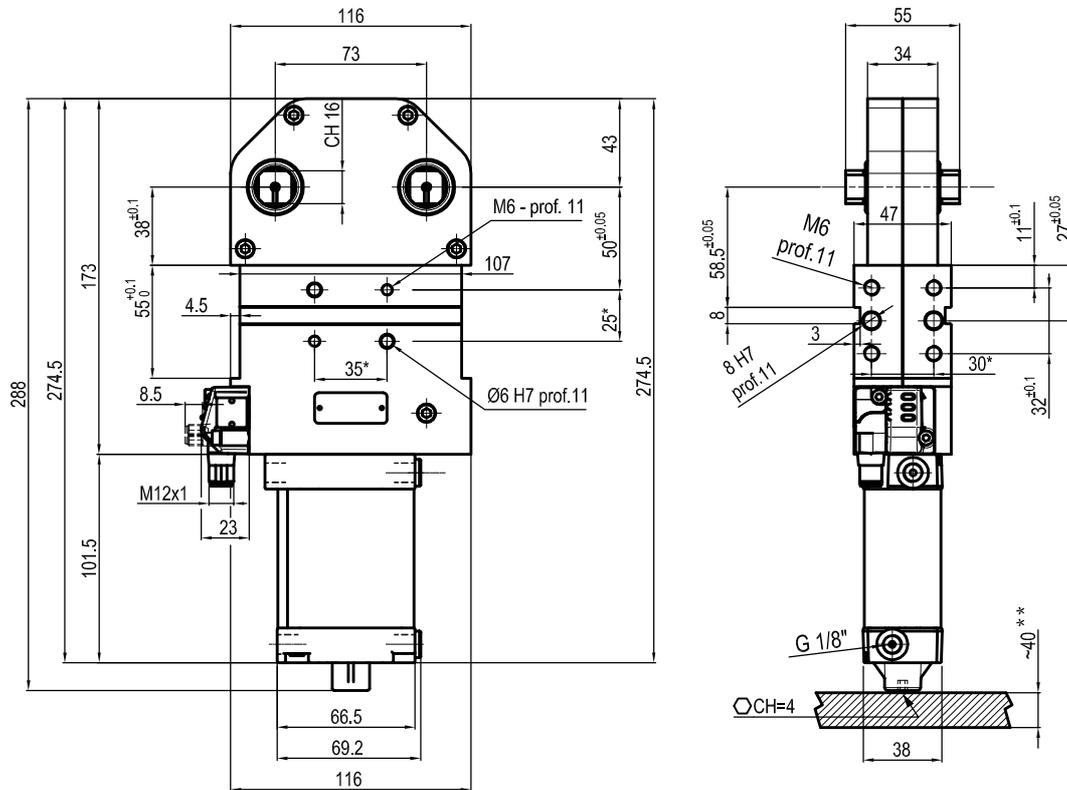


Bore Ø	Clamping moment	Weight
40 mm	55 Nm	2.7 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° + 45° C**
 Opening angle: **adjustable**
 Without arm
 Electronic sensor with M12 swivel connector that can be orientated at 0° or 90°
 Supply voltage: 10-30 Vdc
 IP code: **IP 65**
 Pneumatic ports on both sides

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1
 ** : AREA TO ACCESS ANGLE ADJUSTMENT

Subject to technical modification without notice.

UNIVERSAL Pneumatic clamp arms at 10 mm from pivot point

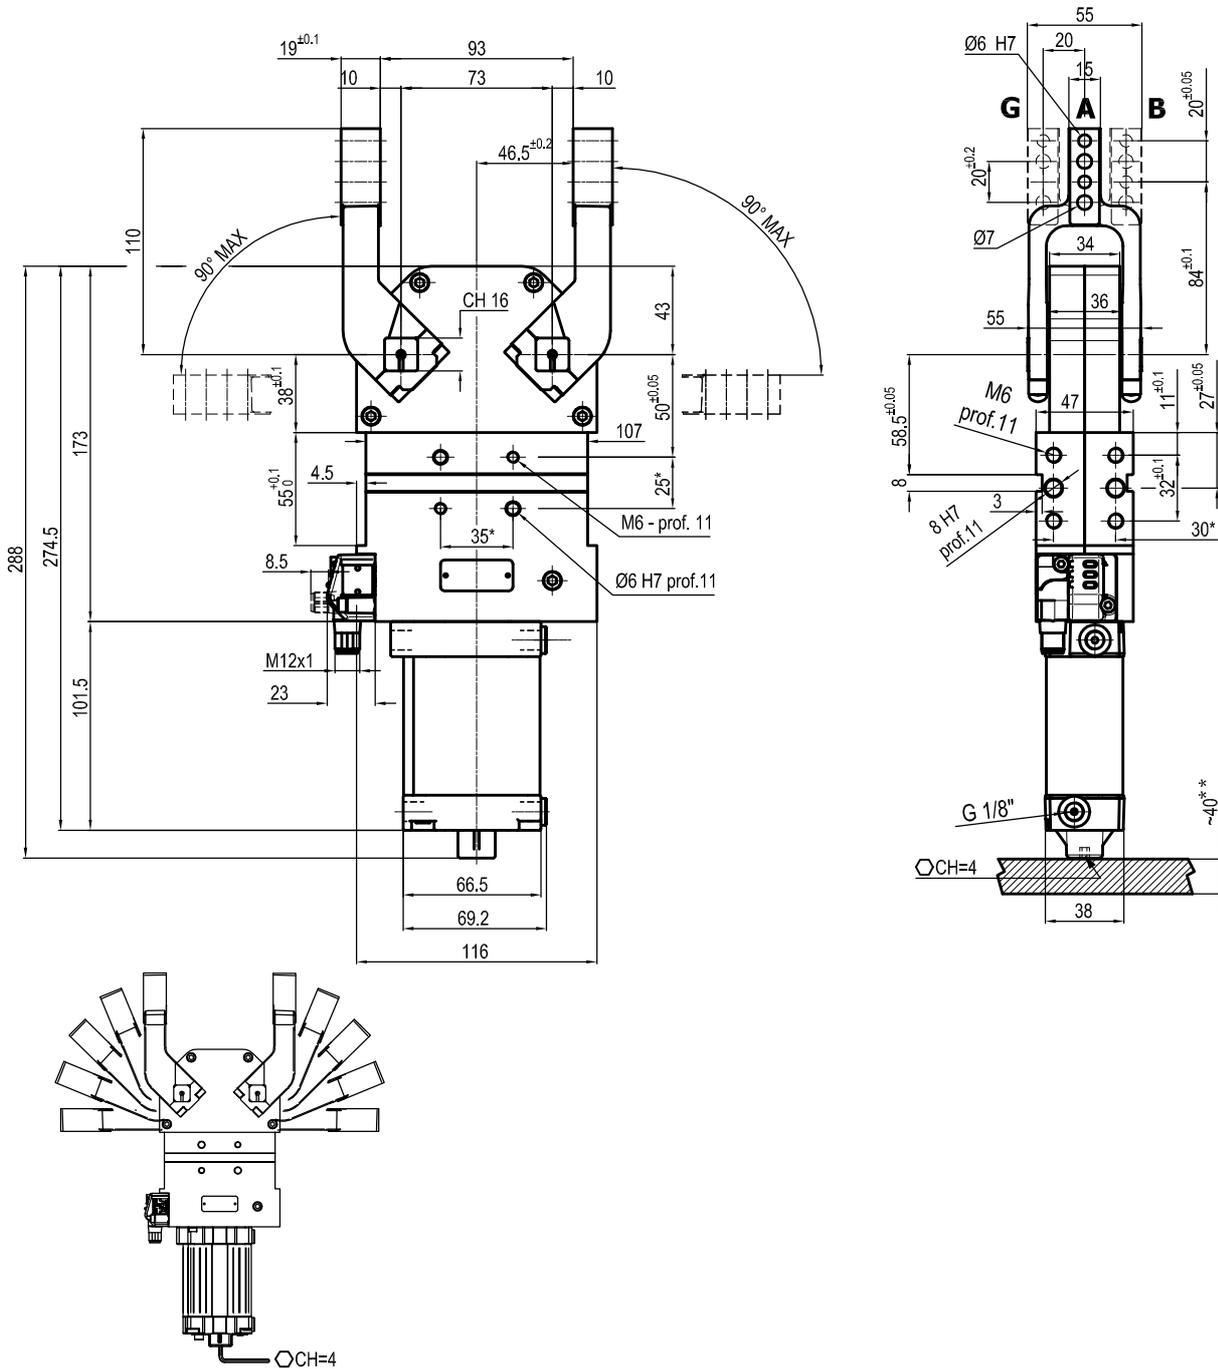


Bore Ø	Clamping moment	Weight (clamping arms not included)
40 mm	55 Nm	2.7 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° + 45° C**
 Opening angle: **adjustable from 0° to 90°**
 Electronic sensor with M12 swivel connector that can be orientated at 0° or 90°
 Supply voltage: 10+30 Vdc
 IP code: **IP 65**
 Pneumatic ports on both sides

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1
 ** : AREA TO ACCESS ANGLE ADJUSTMENT

Subject to technical modification without notice.

UNIVERSAL Pneumatic clamp arms at 45 mm from pivot point

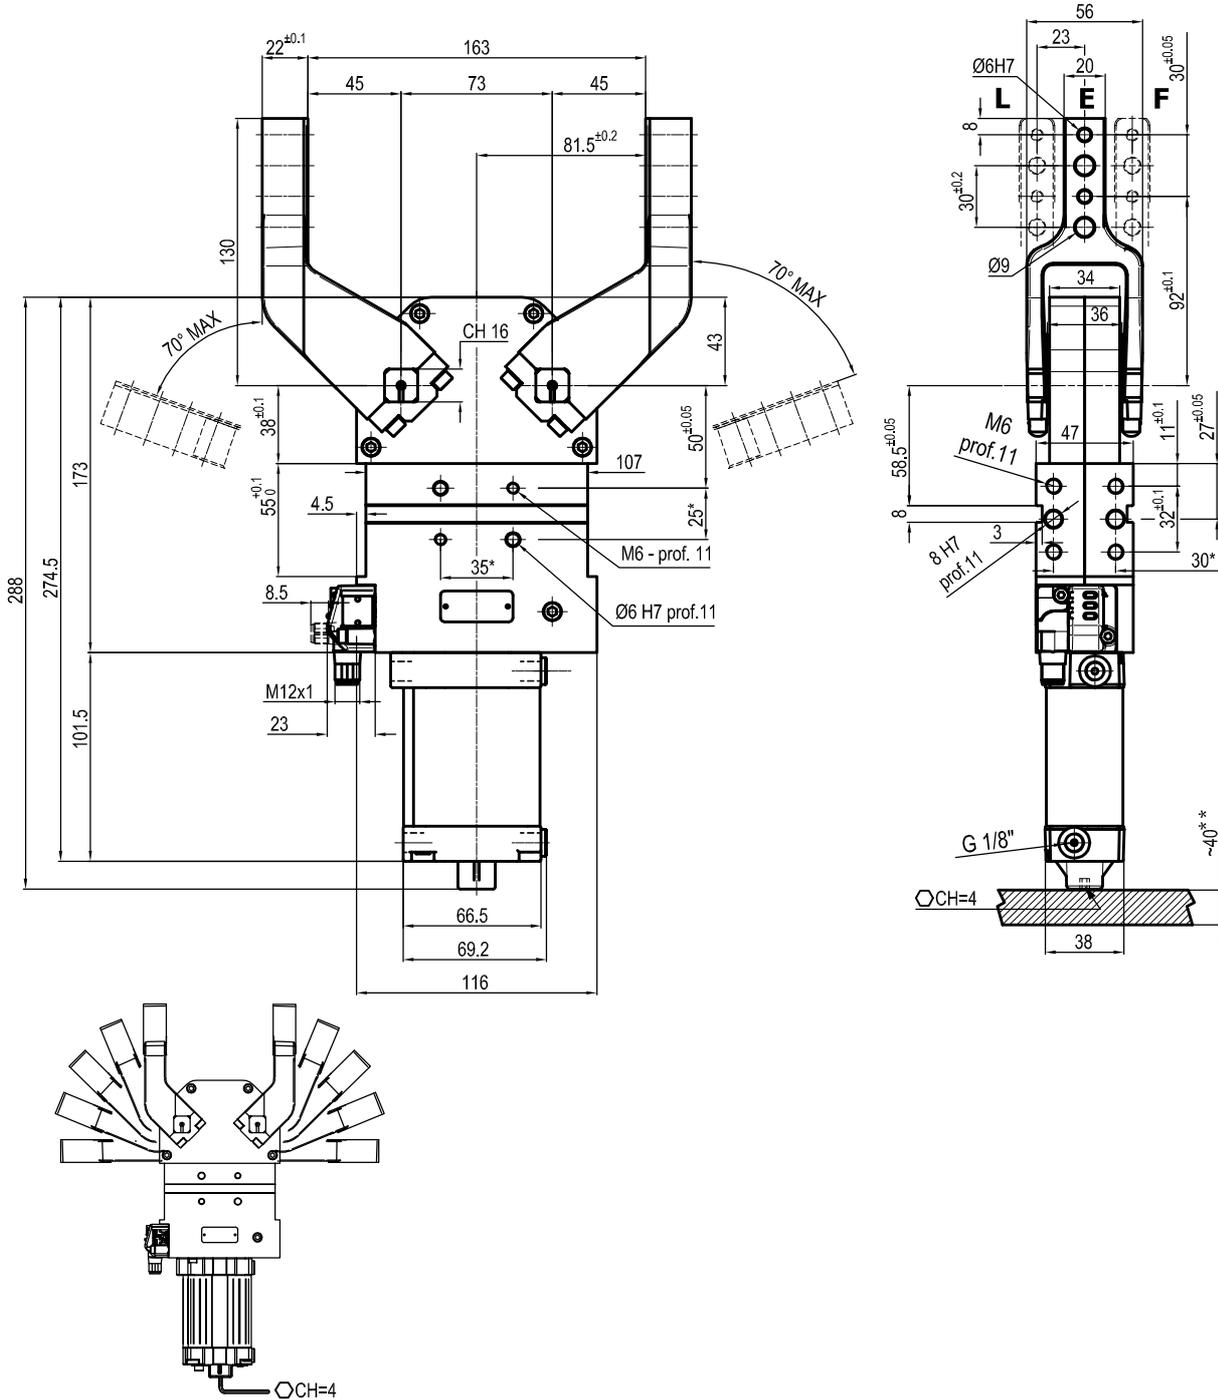

Bore Ø	Clamping moment	Weight (clamping arms not included)
40 mm	55 Nm	2.7 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° + 45° C**
 Opening angle: **adjustable from 0° to 70°**
 Electronic sensor with M12 swivel connector that can be orientated at 0° or 90°
 Supply voltage: 10+30 Vdc
 IP code: **IP 65**
 Pneumatic ports on both sides

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1
 ** : AREA TO ACCESS ANGLE ADJUSTMENT

Subject to technical modification without notice.