LCS63

Unità di centraggio pneumatica, testate compatte doppia asta

L	C	S	6	3	0	5	0	E	A	R
1		2	3		4			5	6	7

1 Serie

LC = Unità di centraggio

2 Versione

S = Pneumatica, testate compatte, doppia asta

3 Taglia

63 = Ø 63 mm

4 Corse

015 = 15 mm
025 = 25 mm
040 = 40 mm
050 = 50mm
060 = 60 mm

5 Sensore di posizione

N = Senza sensore (con piastra di chiusura)
E = Sensore elettronico con connettore M12 orientabile

6 Terminale asta

A = Asta per centraggi dislocati

7 Raschiastelo

R = Raschiastelo metallico

LCS63_ _ _EAR

UNIVERSAL Pneumatic retractable locating pin unit with double rod

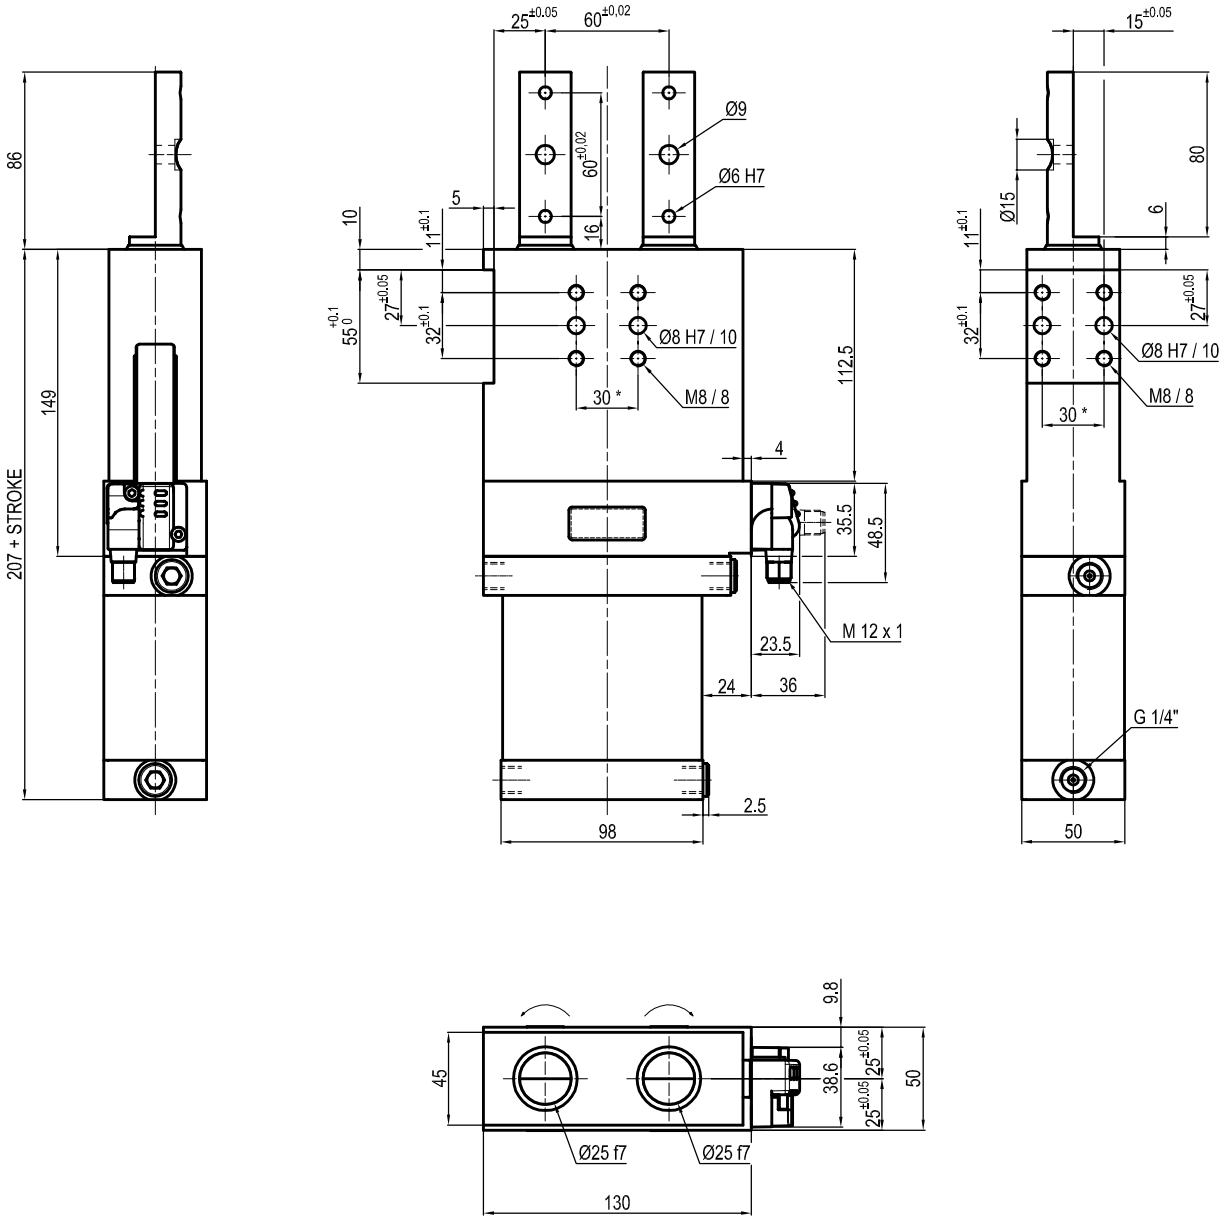

Bore Ø	Max. Torque	Max. Deflection moment	Weight
63 mm	20 Nm ±0.1°	20 Nm ±0.03°	4,0 Kg

Min/Max operating pressure: **0,4 / 0,6 MPa**
Operating temperature: **5° ÷ 45° C**
Strokes in mm.: **15 - 25 - 40 - 50 - 60**
Electronic sensor with M12 swivel connector that can be orientated at 0° or 90°
Supply voltage: 10 ÷ 30 V DC
IP code: **IP 65**
Pneumatic ports on both sides

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice