

Thrust and traction forces													
Cylinder ∅	Rod ∅	Effective area mm ²		Working pressure bar									
				1	2	3	4	5	6	7	8	9	10
Developed force													
32	12	S	= 804	72	144	216	288	360	432	504	576	648	720
		T	= 691	62	124	186	248	310	372	434	496	558	620
40	16	S	= 1257	110	220	330	440	550	660	770	880	990	1100
		T	= 1056	95	190	285	380	475	570	665	760	855	950
50	20	S	= 1963	175	350	525	700	875	1050	1225	1400	1575	1750
		T	= 1649	148	296	444	592	740	888	1036	1184	1332	1480
63	20	S	= 3117	280	560	840	1120	1400	1680	1960	2240	2520	2800
		T	= 2803	250	500	750	1000	1250	1500	1750	2000	2250	2500

S Thrust; T Traction


Spring traction forces				
Cylinder ∅	Load spring	Stroke		
		10	25	50
Developed force				
32	R	56	51	42
	C	60	60	60
40	R	60	55	44
	C	65	65	65
50	R	64	57	46
	C	68	68	68
63	R	65	58	47
	C	70	70	70

R Spring load at rest; C Compressed spring load

Cylinder air consumption													
Cylinder ∅	Rod ∅	Effective area mm ²		Working pressure bar									
				1	2	3	4	5	6	7	8	9	10
Air consumption per 10 mm of stroke													
32	12	S	= 804	0,016	0,024	0,032	0,040	0,048	0,056	0,064	0,072	0,080	0,088
		T	= 691	0,014	0,021	0,028	0,035	0,041	0,048	0,055	0,062	0,069	0,076
40	16	S	= 1257	0,025	0,038	0,050	0,063	0,075	0,088	0,101	0,113	0,126	0,138
		T	= 1056	0,021	0,032	0,042	0,053	0,063	0,074	0,084	0,095	0,106	0,116
50	20	S	= 1963	0,039	0,059	0,079	0,098	0,118	0,137	0,157	0,177	0,196	0,216
		T	= 1649	0,033	0,049	0,066	0,082	0,099	0,115	0,132	0,148	0,165	0,181
63	20	S	= 3117	0,062	0,094	0,125	0,156	0,187	0,218	0,249	0,281	0,312	0,343
		T	= 2803	0,056	0,084	0,112	0,140	0,168	0,196	0,224	0,252	0,280	0,308

S Thrust; T Traction




FIXING ELEMENTS AND ACCESSORIES - CYLINDERS A95

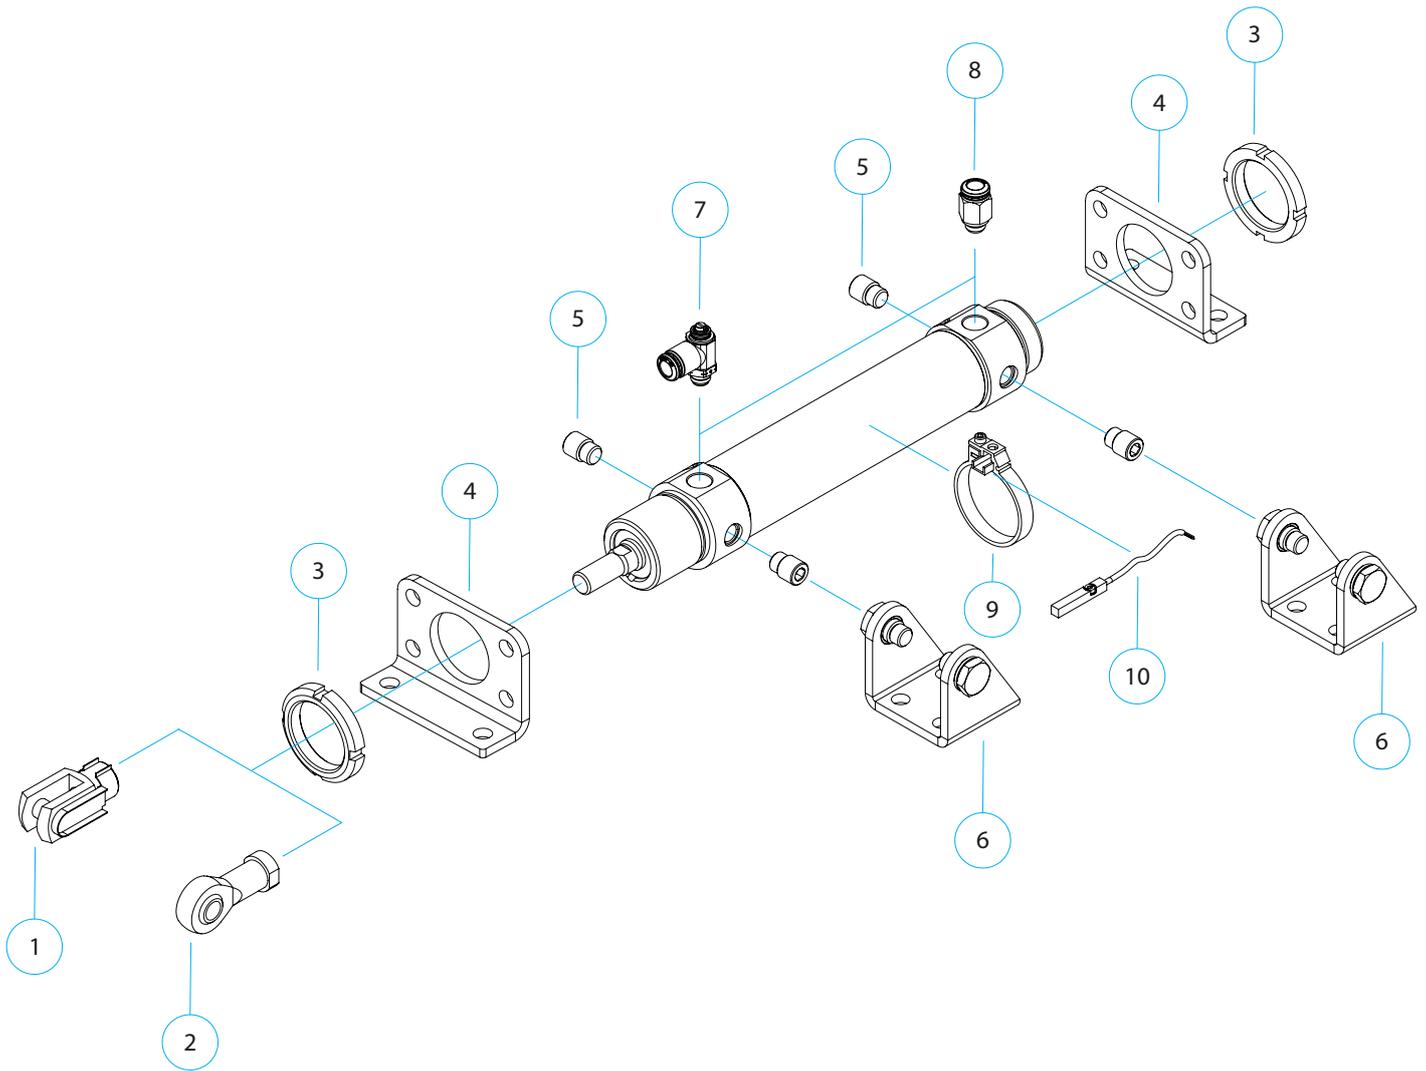

1	YOKE WITH LOCABLE PIN - STEEL - FC
2	ROD ENDS SELF-LUBRICATING - TF
3	NUT - AGT
4	FOOT FLANGE - APD
5	PIVOT - APE
6	CLEVIS BRACKET - ACC
7	FLOW REGULATOR
8	AUTOMATIC CONNECTOR
9	BRACKET FOR DSL - AFX
10	MAGNETIC SWITCHES - DSL




SERIES - CYLINDERS A95

AB - SINGLE-ACTING MAGNETIC

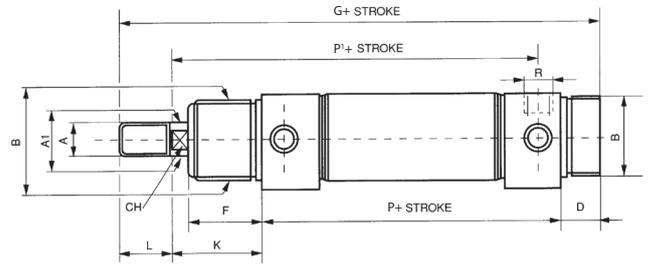




Ø	A	A1	B	T	C	D	F	G	K	L	P	P ¹	CH	R
32	M10x1.25	12	M30x1.5	36.5	38	14	30	168	38	20	96	125	10	1/8" GAS
40	M12x1.25	16	M38x1.5	44	46	16	35	196	45	24	111	144	12	1/4" GAS
50	M16x1.5	20	M45x1.5	55	57	18	38	220	50	32	120	158	16	1/4" GAS
63	M16x1.5	20	M45x1.5	67.5	70	18	38	224	50	32	124	161	16	3/8" GAS

AD - SINGLE-ACTING MAGNETIC - SPRING THRUST

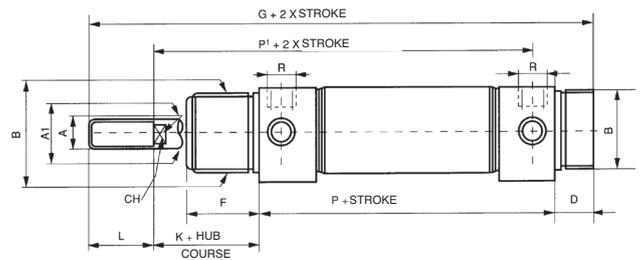

Ø	A	A1	B	T	C	D	F	G	K	L	P	P ¹	CH	R
32	M10x1.25	12	M30x1.5	36.5	38	14	30	168	38	20	96	125	10	1/8" GAS
40	M12x1.25	16	M38x1.5	44	46	16	35	196	45	24	111	144	12	1/4" GAS
50	M16x1.5	20	M45x1.5	55	57	18	38	220	50	32	120	158	16	1/4" GAS
63	M16x1.5	20	M45x1.5	67.5	70	18	38	224	50	32	124	161	16	3/8" GAS




AF - DOUBLE ACTING MAGNETIC

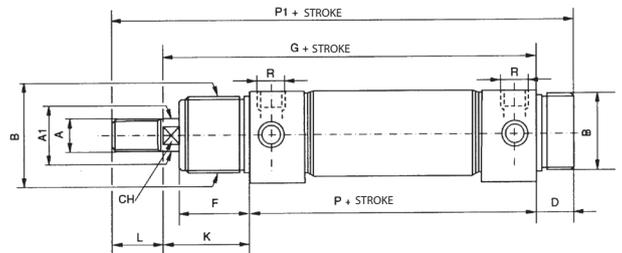

Ø	A	A1	B	T	C	D	F	G	K	L	P	P ¹	CH	R
32	M10x1.25	12	M30x1.5	36.5	38	14	30	134	38	20	96	168	10	1/8" GAS
40	M12x1.25	16	M38x1.5	44	46	16	35	156	45	24	111	196	12	1/4" GAS
50	M16x1.5	20	M45x1.5	55	57	18	38	170	50	32	120	220	16	1/4" GAS
63	M16x1.5	20	M45x1.5	67.5	70	18	38	174	50	32	124	224	16	3/8" GAS




SERIES - CYLINDERS A95

AH - DOUBLE ACTING CUSHIONED MAGNETIC

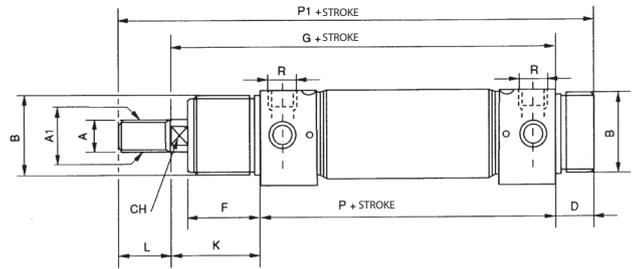




Ø	A	A1	B	T	C	D	F	G	K	L	P	P1	CH	R
32	M10x1.25	12	M30x1.5	36.5	38	14	30	134	38	20	96	168	10	1/8"GAS
40	M12x1.25	16	M38x1.5	44	46	16	35	156	45	24	111	196	12	1/4"GAS
50	M16x1.5	20	M45x1.5	55	57	18	38	170	50	32	120	220	16	1/4"GAS
63	M16x1.5	20	M45x1.5	67.5	70	18	38	174	50	32	124	224	16	3/8"GAS

AJ - DOUBLE ACTING MAGNETIC WITH DOUBLE ROD END

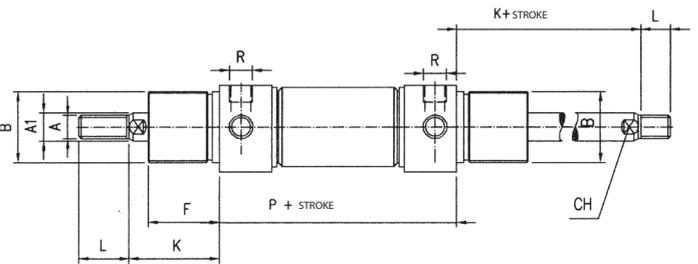


Ø	A	A1	B	T	C	F	K	L	P	CH	R
32	M10x1.25	12	M30x1.5	36.5	38	30	38	20	96	10	1/8"GAS
40	M12x1.25	16	M38x1.5	44	46	35	45	24	111	12	1/4"GAS
50	M16x1.5	20	M45x1.5	55	57	38	50	32	120	16	1/4"GAS
63	M16x1.5	20	M45x1.5	67.5	70	38	50	32	124	16	3/8"GAS

AL - DOUBLE ACTING CUSHIONED MAGNETIC WITH DOUBLE ROD END

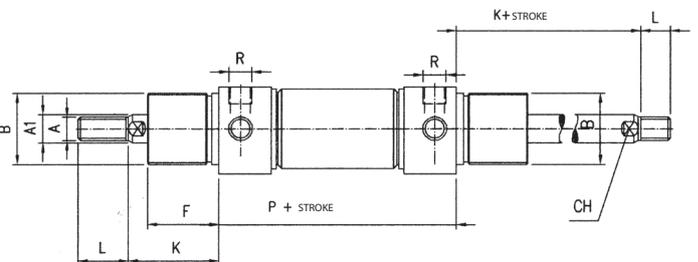


Ø	A	A1	B	T	C	F	K	L	P	CH	R
32	M10x1.25	12	M30x1.5	36.5	38	30	38	20	96	10	1/8"GAS
40	M12x1.25	16	M38x1.5	44	46	35	45	24	111	12	1/4"GAS
50	M16x1.5	20	M45x1.5	55	57	38	50	32	120	16	1/4"GAS
63	M16x1.5	20	M45x1.5	67.5	70	38	50	32	124	16	3/8"GAS

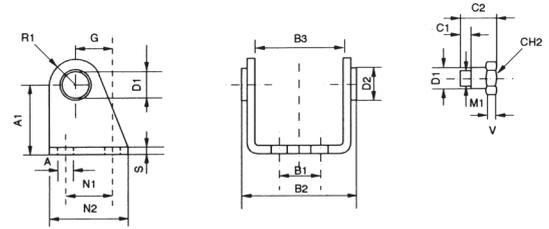FIXING ELEMENTS AND ACCESSORIES - CYLINDERS A95
ACC - CLEVIS BRACKET


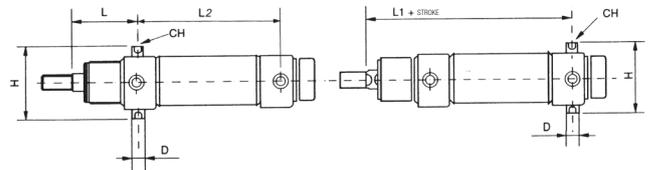
Code	Ø	D1	D2	A	A1	G	M1	N1	N2	R1	S	CH2	B1	B2	B3	V	C1	C2
ACC 032	32	10	16	7	35	20	M8x1	24	40	12	4	13	20	50.1	38.1	4	6	18
ACC 040	40	12	18	9	40	27	M10x1	30	50	13	5	17	28	60.1	46.1	5	7	21.6
ACC 050	50	14	23	9	45	30	M12x1.5	34	54	14	6	19	34	74.1	57.1	6	9	26.4
ACC 063	63	16	24	9	50	34	M14x1.5	35	65	16	6	19	42	88.1	70.1	6	15	34

MATERIAL: STEEL

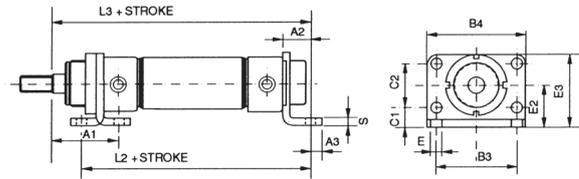APD - FOOT FLANGE


Code	Ø	E	E2	E3	C1	C2	L2	L3	B3	B4	S	A1	A2	A3
APD 032	32	7	28	49	14	28	124	148	52	66	4	48	14	7
APD 040	40	9	33	58	18	30	151	176	60	80	5	60	20	10
APD 050	50	9	40	70	20	40	160	190	70	90	6	64	20	10
APD 063	63	9	45	80	20	50	164	194	76	96	6	65	20	10

MATERIAL: STEEL


APE - PIVOT


Code	Ø	D	H	L1	L2	L	CH
APE 032	32	10	51	125	78	47	5
APE 040	40	12	61	144	87	57	6
APE 050	50	14	75	158	96	62	6
APE 063	63	16	90	161	98	63	8

MATERIAL: STEEL

FIXING ELEMENTS AND ACCESSORIES - CYLINDERS A95


AGT - NUT

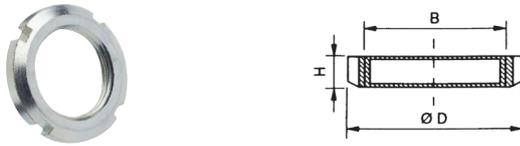

Code	B	D	H
AGT 032	M30x1.5	45	7
AGT 040	M38x1.5	50	8
AGT 050	M45x1.5	58	9

MATERIAL: STEEL


DA - NUT FOR RODS

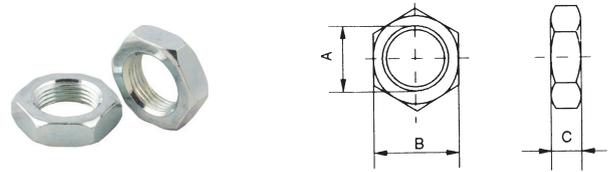

Code	A	B	C
0DA00 00 51 C9 ZI	M10x1.25	17	8
0DA00 00 51 D5 ZI	M12x1.25	19	7
0DA00 00 51 E3 ZI	M16x1.5	22	6

MATERIAL: STEEL


FC - YOKE WITH LOCABLE PIN

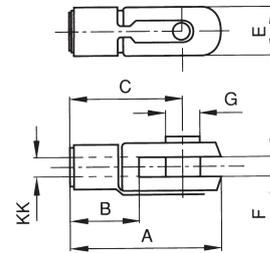

Code	KK	A	B	C	E	F	G
FC 025	M10x1.25	52	20	40	20	10	10
FC 040	M12x1.25	62	24	48	24	12	12
FC 050	M16x1.5	83	32	64	32	16	16

MATERIAL: STEEL

TF - ROD ENDS SELF-LUBRICATING

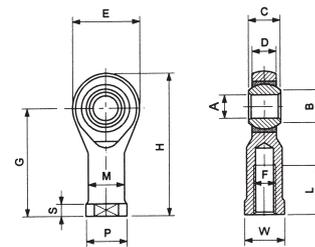

Code ●	Code ■	F	A	B	C	Ø Sfera	D	E	G	H	L	M	P	S	W	Radial load		Weight
																D	S	
			H7	0	0		±0.13	±0.5	±0.5		±0.7	±0.7	±0.5	+0.2 -0.7	±0.25	kg	kg	g
TF 025	TFI 025	M10x1,25	10	12,9	14	19,05	11,5	30	43	58	15	15	19	6,5	16	1.200	3.100	88
TF 040	TFI 040	M12x1,25	12	15,4	16	22,23	12,5	34	50	67	18	17,5	22	6,5	18	1.400	3.700	120
TF 050	TFI 050	M16x1,5	16	19,3	21	28,58	15,5	42	64	85	24	22	27	8	24	2.500	6.300	240

● MATERIAL: STEEL / MATERIAL: STEEL

D Dynamic; S Static