




Temperature

- 10 °C
+ 60 °C



Reference Standard

ATEX
2014/34/UE

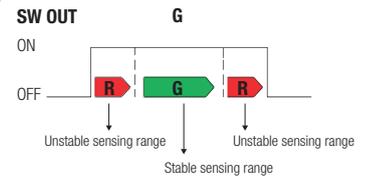


Dual color LED allows more precise positioning.

CHARACTERISTICS




CODE	DC02 P 2M	DC02 P M8
Connection	∅ 2,8 - 3WIRE PUR - 2MT	∅ 2,8 - 3 WIRE PUR - M8 CONNECTOR
Switching logic	Solid State Output, Normally open	
Sensor type	PNP Current Sourcing	
Voltage Range	10÷28V DC	
Switching current	80 mA max	
Contact rating	2W max	
Max voltage drop	10mA @ 24 V DC max	
Max voltage drop	1,5V max	
Leakage current	0,05mA max	
Output status indicator	Red/Green Led	
Operating frequency	1000 Hz	
Magnetic requirement	40 Gauss	
Shock	50 G	
Vibration	9 G	
Protection degree	IEC 60529 IP67	

Sensor cave



DC02 P M8

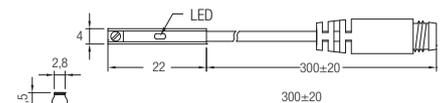

DC02 P 2M

