



Reference standard

ATEX
2014/34/UE



Pressure

Max 10 bar (1 MPa)




Temperature

- 10 °C
+ 45 °C

CHARACTERISTICS

Fluid	filtered air 10 µm
Commutation system	spool system
Connections	for sub-base
Nominal bore (mm)	4
Nominal flow rate (l/min)	390
Valve body	acetalic resin
Seals	NBR
Electropilot/Coil	Series A/U05
Voltage	24 V DC - 12 V DC - 24 V AC - 110 V AC - 230 V AC

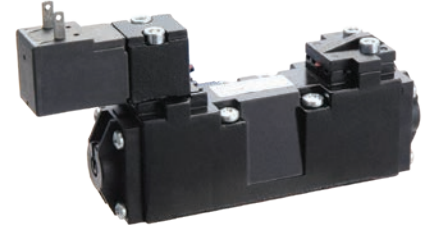

Series	Type	Control 14	Return 12
F	0 2	2	2
F Compa 4 Miniature Valves	02 5/2 Sub-base mounting 05 5/3 c.c. Sub-base mounting 06 5/3 o.c. Sub-base mounting 07 5/3 p.c. Sub-base mounting	2 Electrical DC 4 Pneumatic 7 Electrical DC/AC	0 Pneumomechanical spring 2 Electrical DC 4 Impulse pneumatic 7 Electrical DC/AC


c.c. = closed centres **c.a.** = open centres **c.p.** = pressurized centres

Impulse pneumatic

Single impulse




F-0240



Double impulse



F-0244



F-0544



F-0644



F-0744



Impulse electrical

Single impulse




F-0220 - F-0270




Double impulse



F-0222 - F-0277




F-0522 - F-0577



F-0622 - F-0677



F-0722 - F-0777



Inlet plate G1/8

F-4500



Manifold sub-base, threaded connections G1/8

F-4505



Solenoid valves are supplied without coil and connector