

LCA63

Pneumatic retractable locating pin unit,
double orientable rod




L	C	A	6	3	0	4	0	K	A	R
1	2	3	4		5	6	7			

1 Series	2 Version	3 Size
LC = Retractable locating pin unit	A = Pneumatic, double orientable rod	63 = Ø 63 mm

4 Strokes	5 Sensor	6 Rod end style
015 = 15 mm 025 = 25 mm 040 = 40 mm 050 = 50mm 060 = 60 mm 075* = 75 mm 100* = 100 mm 110* = 110 mm * = Special strokes	D = Pneumatic sensor N = No sensor (with protection plate) K = Electronic sensor PNP (optical) (DF-K)	A = Rod for off-set pins

7 Option
R = Metallic rod scraper

LCA63__KAR

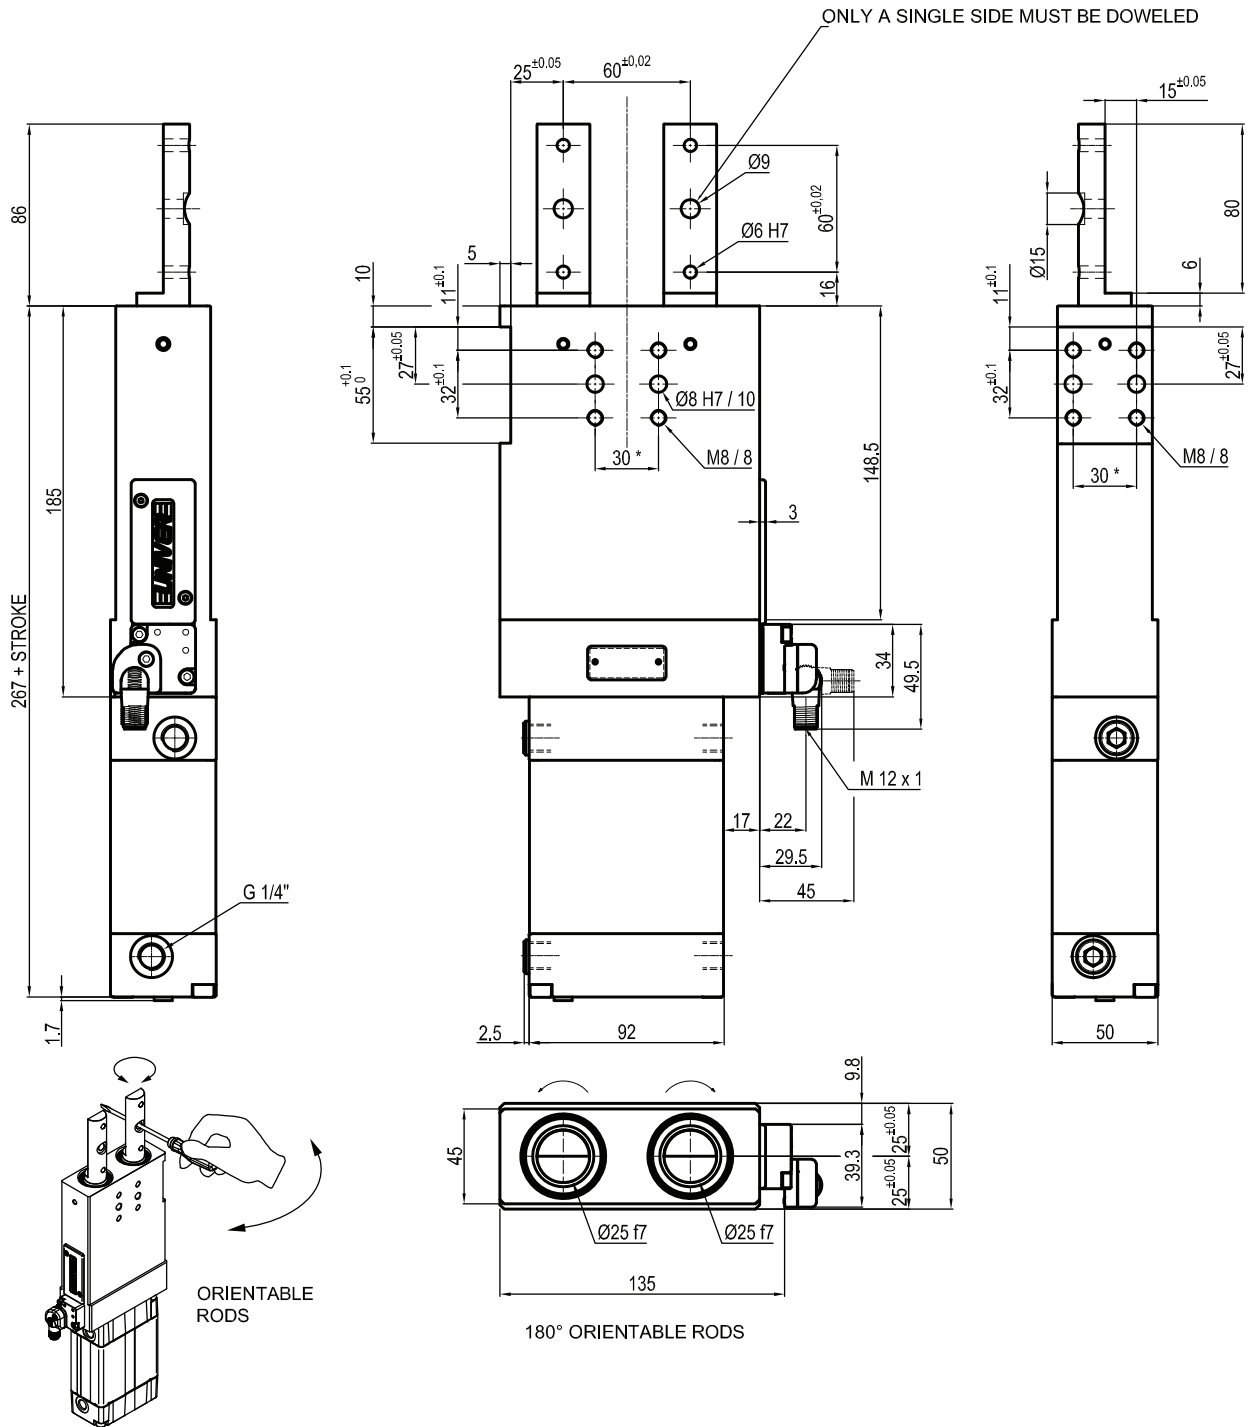

Bore Ø	Max. pull force 0,5 MPa	Max. push force 0,5 MPa	Max. torque 20 Nm	Max. deflection moment 20 Nm	Weight
63 mm	1430 N	1530 N	± 0,1°	± 0,07°	5,8 Kg
X = 100 mm					

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ± 45° C**
 Strokes in mm.: **15 - 25 - 40 - 50 - 60**
 Electronic sensor with M12 swivel connector, from 0° to 90°
 Supply voltage: 10 ÷ 30 Vdc
 IP code: **IP 65**
 Pneumatic ports on both sides

* : TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

Subject to technical modifications without notice