

LCP32

Retractable locating pin unit



L	C	P	3	2	0	4	0	U	C	R
1	2	3	4		5	6	7			

1 Series	2 Version	3 Size
-----------------	------------------	---------------

LC = Retractable locating pin unit

P = Pneumatic

32 = \varnothing 32 mm

4 Strokes	5 Sensing style	6 Rod end style
------------------	------------------------	------------------------

040 = 40 mm


N = No sensor
(with protection plate)
U = Electronic sensor with M12
swivel connector

C = Rod with cross-profiled ends

7 Rod scraper


R = Rod scraper in stainless steel

■ Rod end style



Type C
 \varnothing 16 mm

Pneumatic retractable locating pin unit

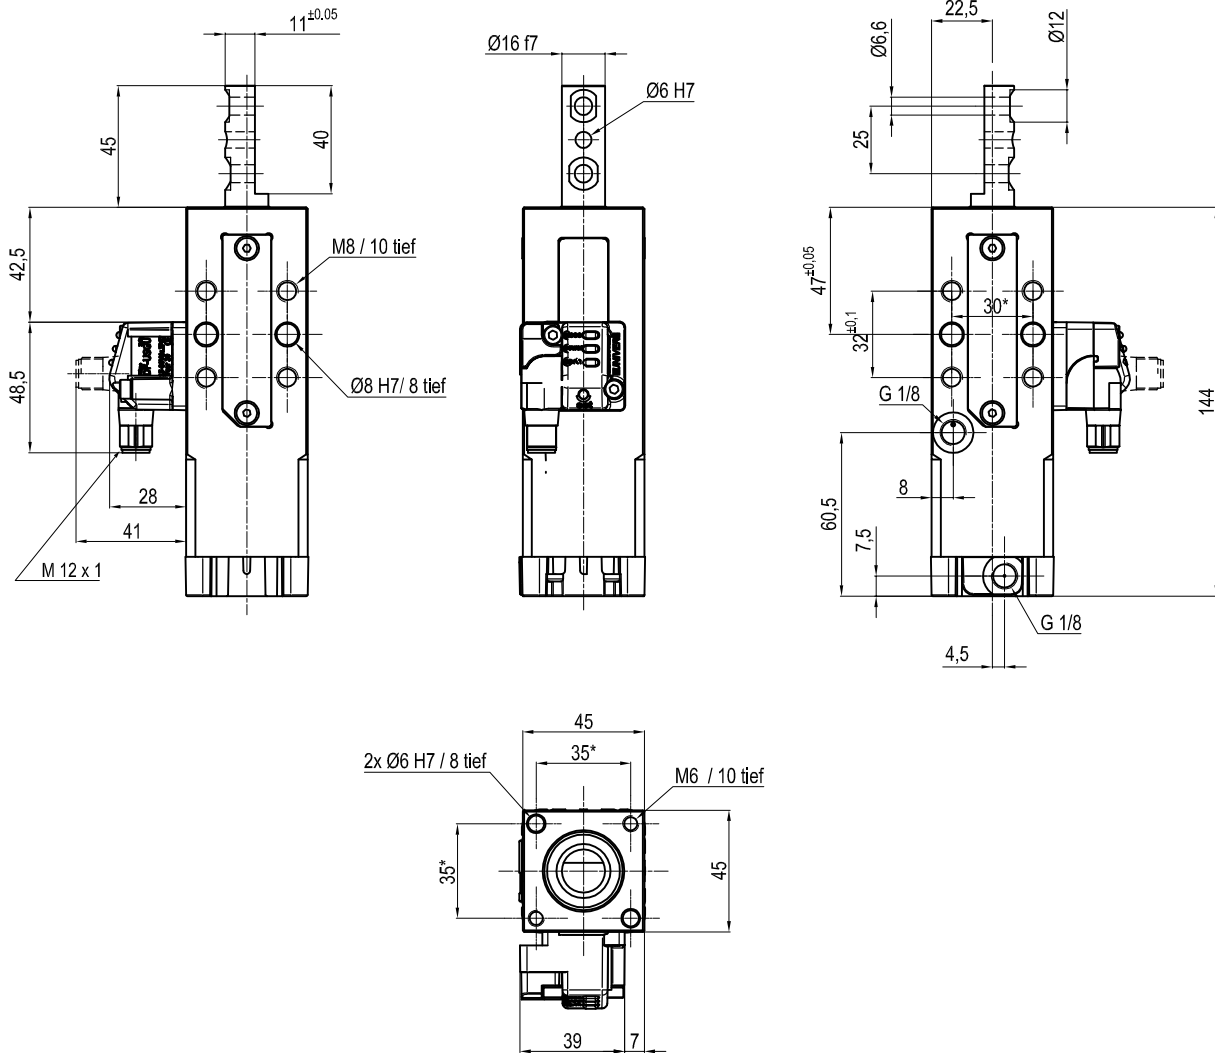


Bore Ø	Max. torque	Max. deflection moment	Weight
32 mm	6 Nm ±0.06°	5,5 Nm ±0.03°	1.7 Kg

Min./max. operating pressure: 0,4 / 0,8 MPa
 Operating temperature: 5° + 45° C
 Strokes in mm.: 20 - 40
 Electronic sensor with M12 swivel connector that can be orientated at 0° or 90°
 Supply voltage: 10+30 Vdc
 IP code: IP 65

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.

Pneumatic retractable locating pin unit

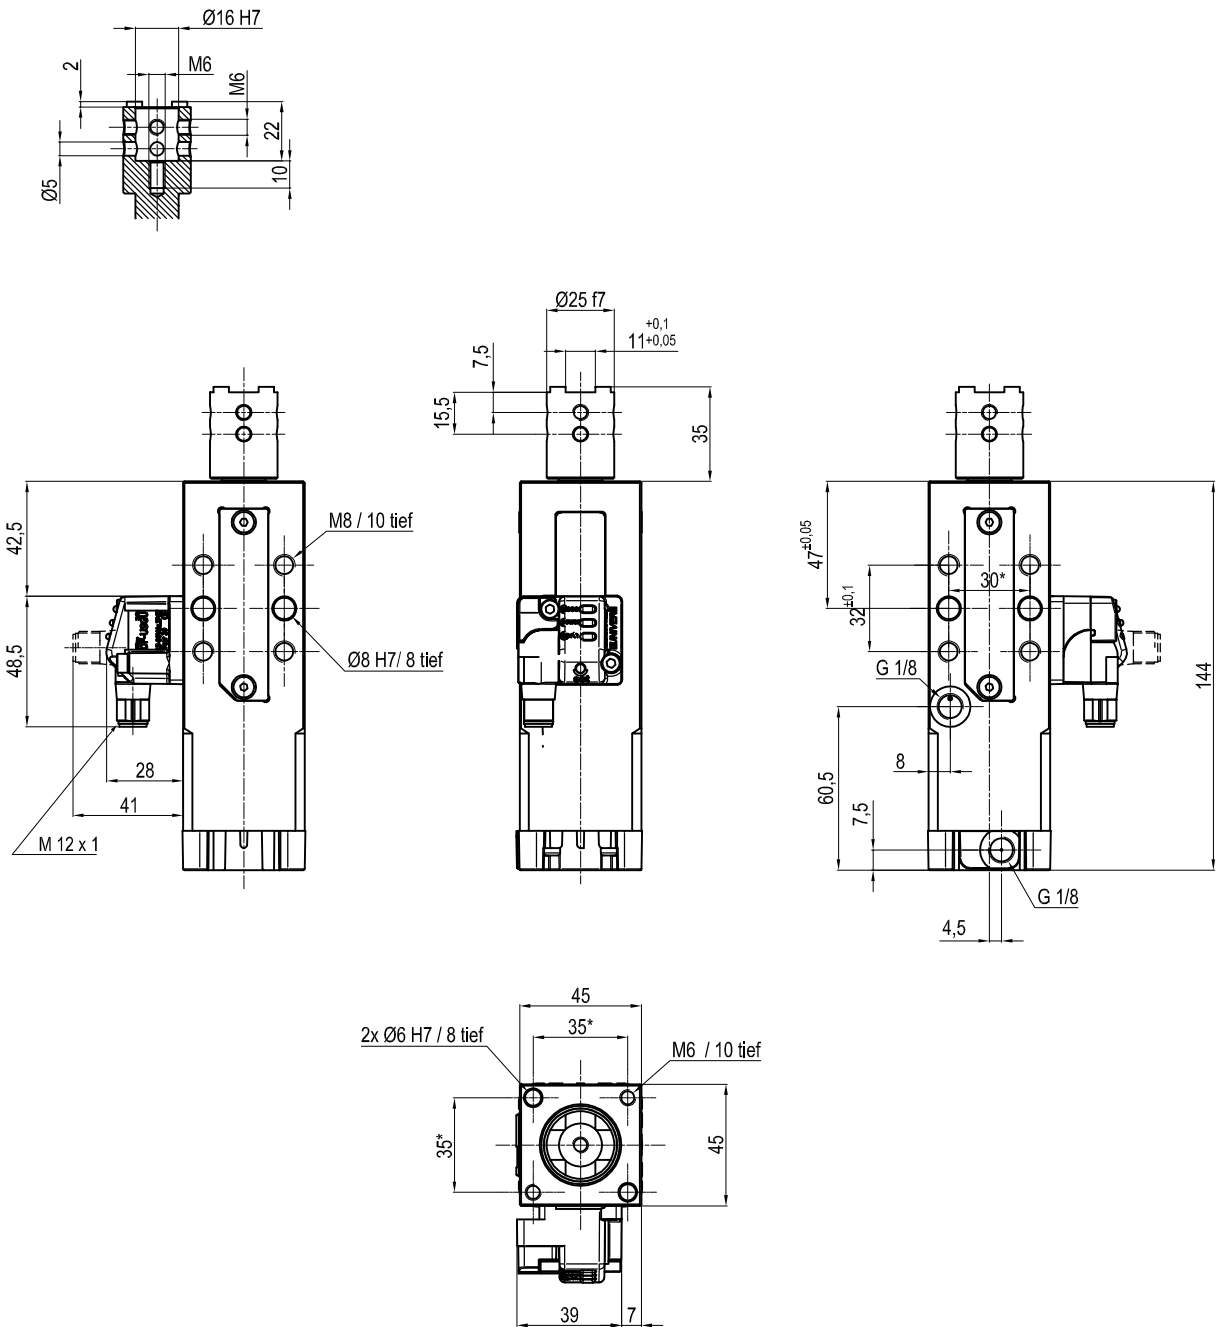


Bore Ø	Max. torque	Max. deflection moment	Weight
32 mm	6 Nm ±0.06°	5,5 Nm ±0.03°	1.7 Kg

Min./max. operating pressure: 0,4 / 0,8 MPa
 Operating temperature: 5° + 45° C
 Strokes in mm.: 20 - 40
 Electronic sensor with M12 swivel connector that can be orientated at 0° or 90°
 Supply voltage: 10+30 Vdc
 IP code: IP 65

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.

Pneumatic retractable locating pin unit

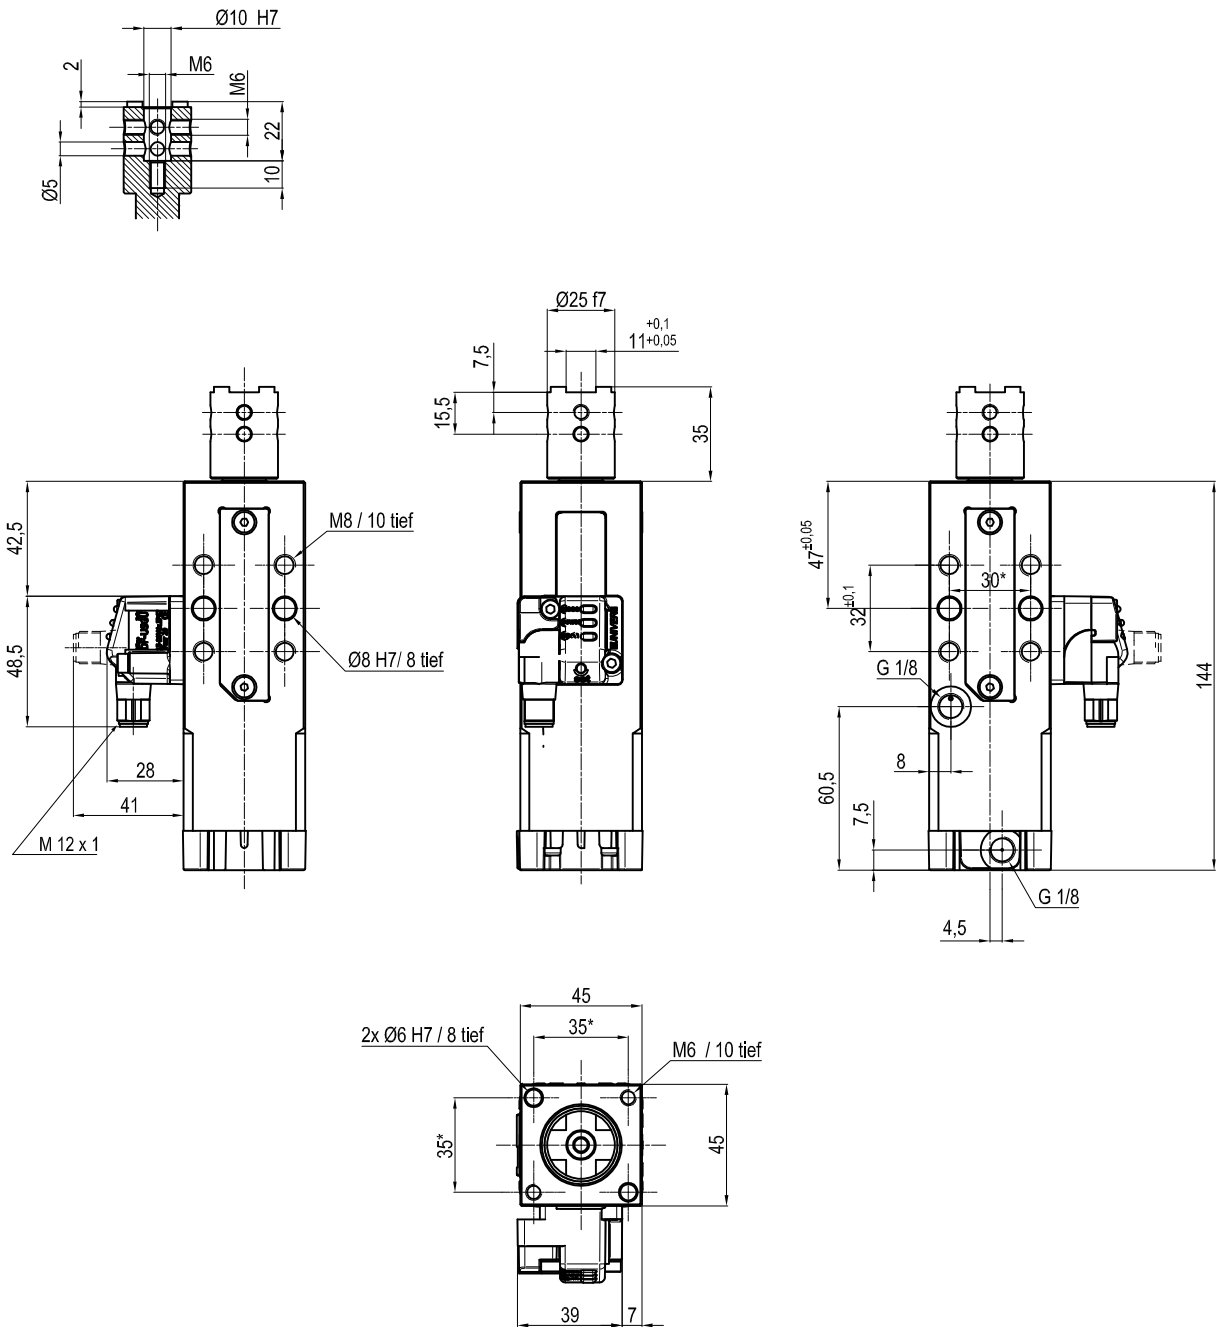

Bore Ø	Max. torque	Max. deflection moment	Weight
32 mm	6 Nm ±0.06°	5,5 Nm ±0.03°	1.7 Kg

Min./max. operating pressure: 0,4 / 0,8 MPa

Operating temperature: 5° ± 45° C

Strokes in mm.: 20 - 40

Electronic sensor with M12 swivel connector that can be orientated at 0° or 90°

Supply voltage: 10-30 Vdc

IP code: IP 65

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.