



LNE350

Electric Power clamps conforming to NAAMS Standards

LNE | 350 | N | L | 31 |

1 2 3 4 5

1 Series

LNE = Electric Power Clamps conforming to NAAMS Standards

2 Size

350 = 330 Nm
 Mounting surface interchangeable with pneumatic power clamp, Ø63 mm

3 Arm mount position

N = No arm




4 Output shaft mounting options

N = Dual square shaft
L = Left side only
R = Right side only

5 Control unit


31 = 1 connector M12 4 poles T CODE
 +1 connector M12 5 poles A CODE

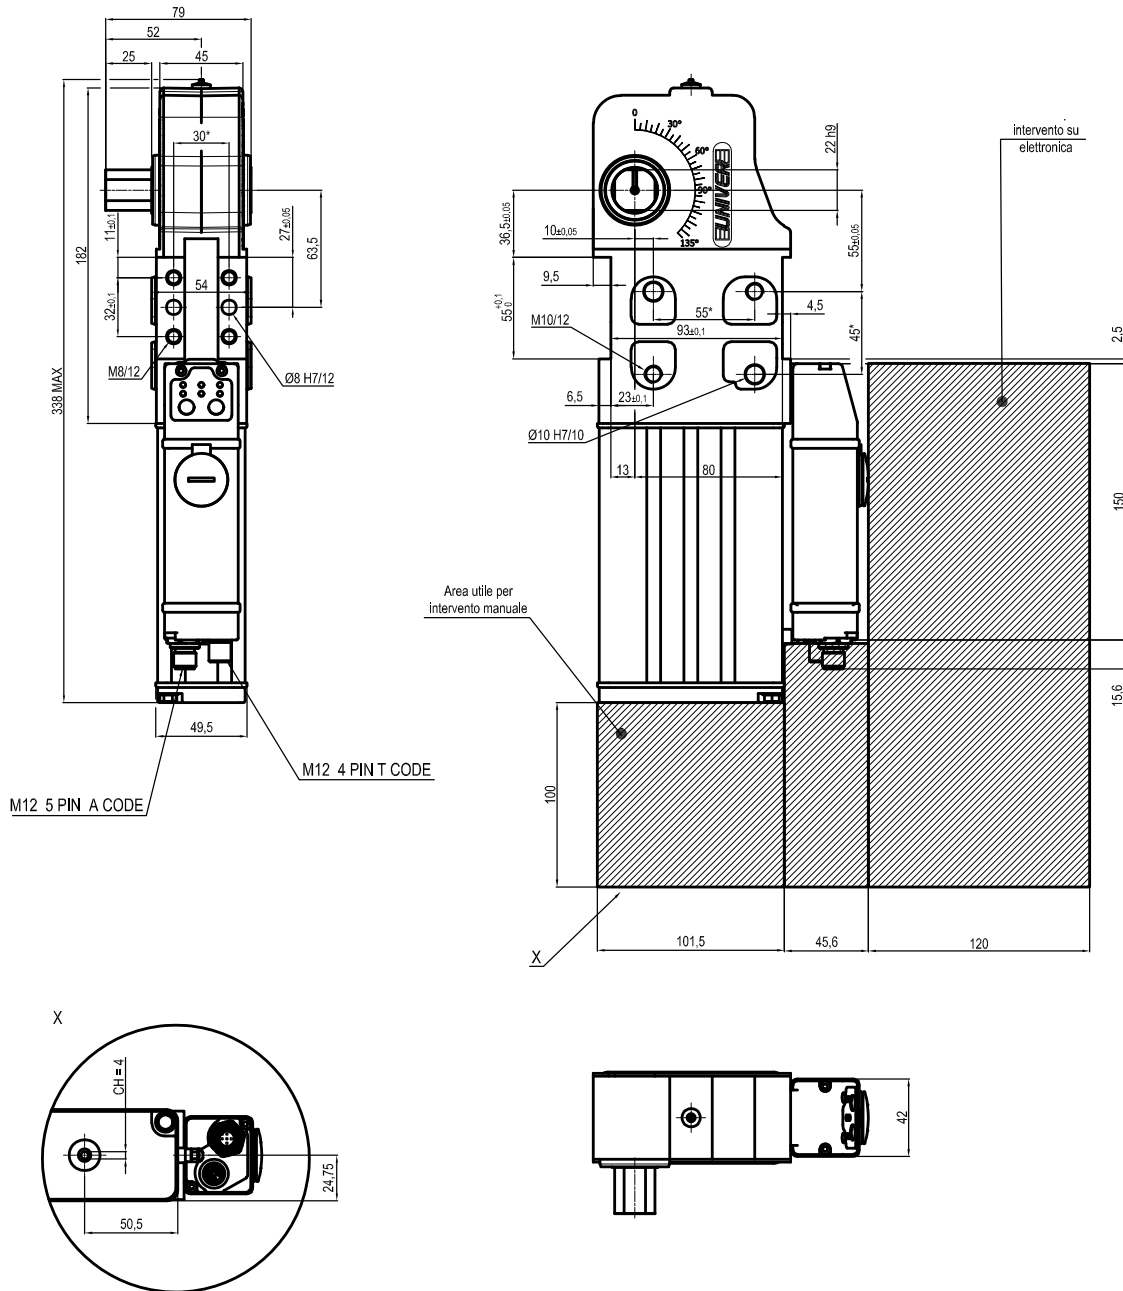

Size	Clamping moment	Closing time**	Weight
350	330 Nm	1,4 sec x 90°	3,6 Kg

Operating temperature: 5° ÷ 40° C
Without arm
IP code: IP 65


* : TOLERANCE BETWEEN DOWELS ± 0.02, BETWEEN SCREW HOLES ± 0.1
** : FOR MORE DETAILS SEE TECHNICAL SPECIFICATIONS

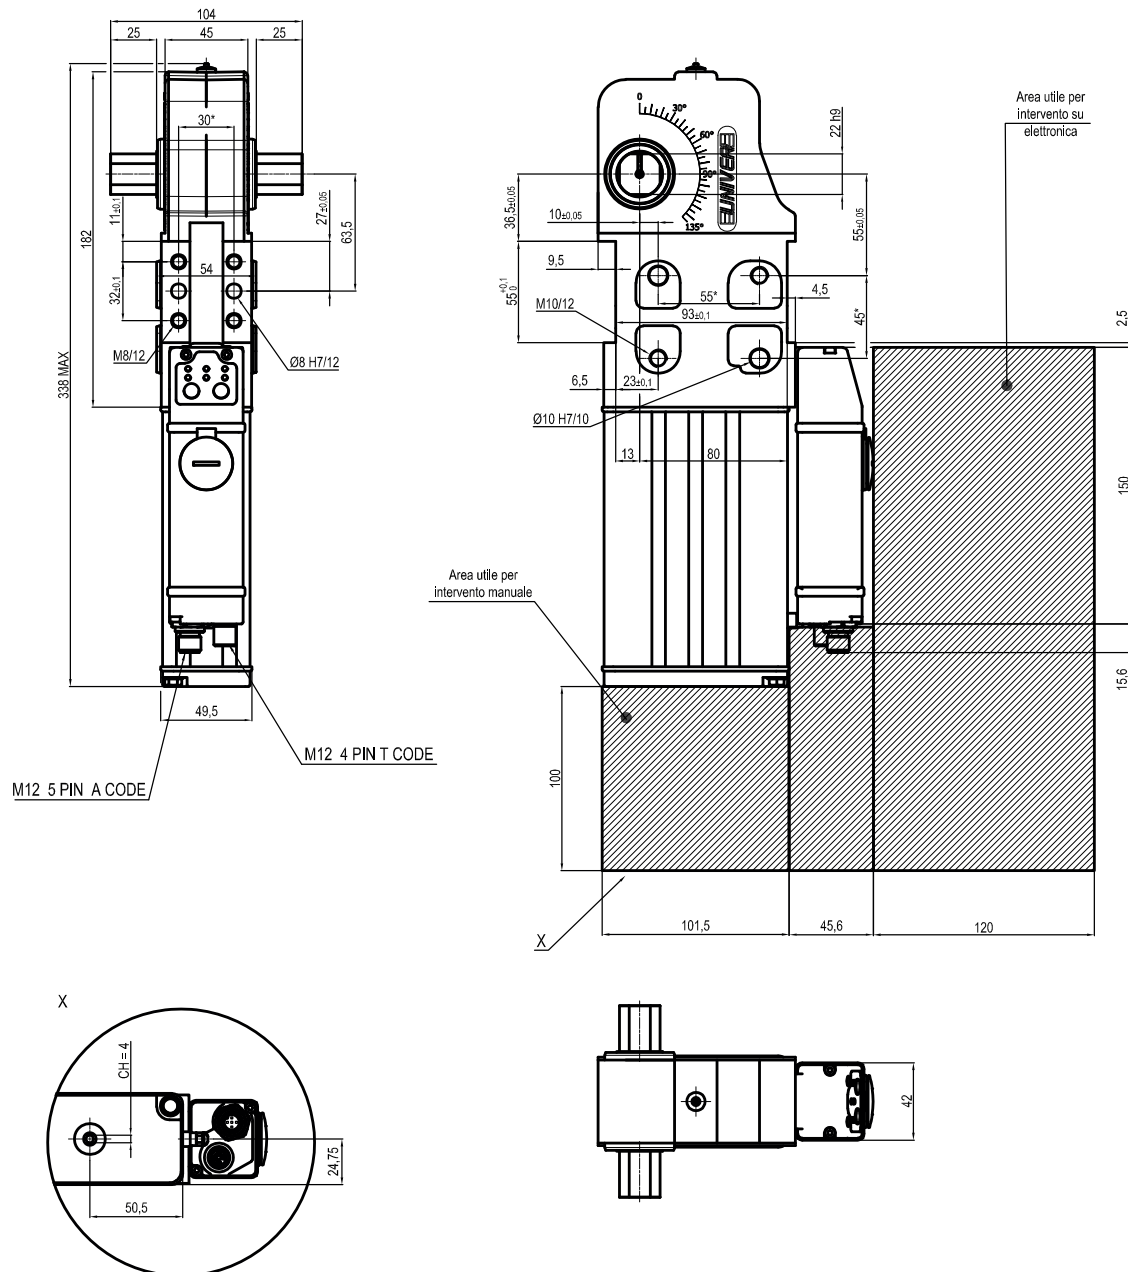

Size	Clamping moment	Closing time**	Weight
350	330 Nm	1,4 sec x 90°	3,6 Kg

Operating temperature: 5° ÷ 40° C
 Without arm
 IP code: IP 65

* : TOLERANCE BETWEEN DOWELS ± 0.02, BETWEEN SCREW HOLES ± 0.1
 ** : FOR MORE DETAILS SEE TECHNICAL SPECIFICATIONS

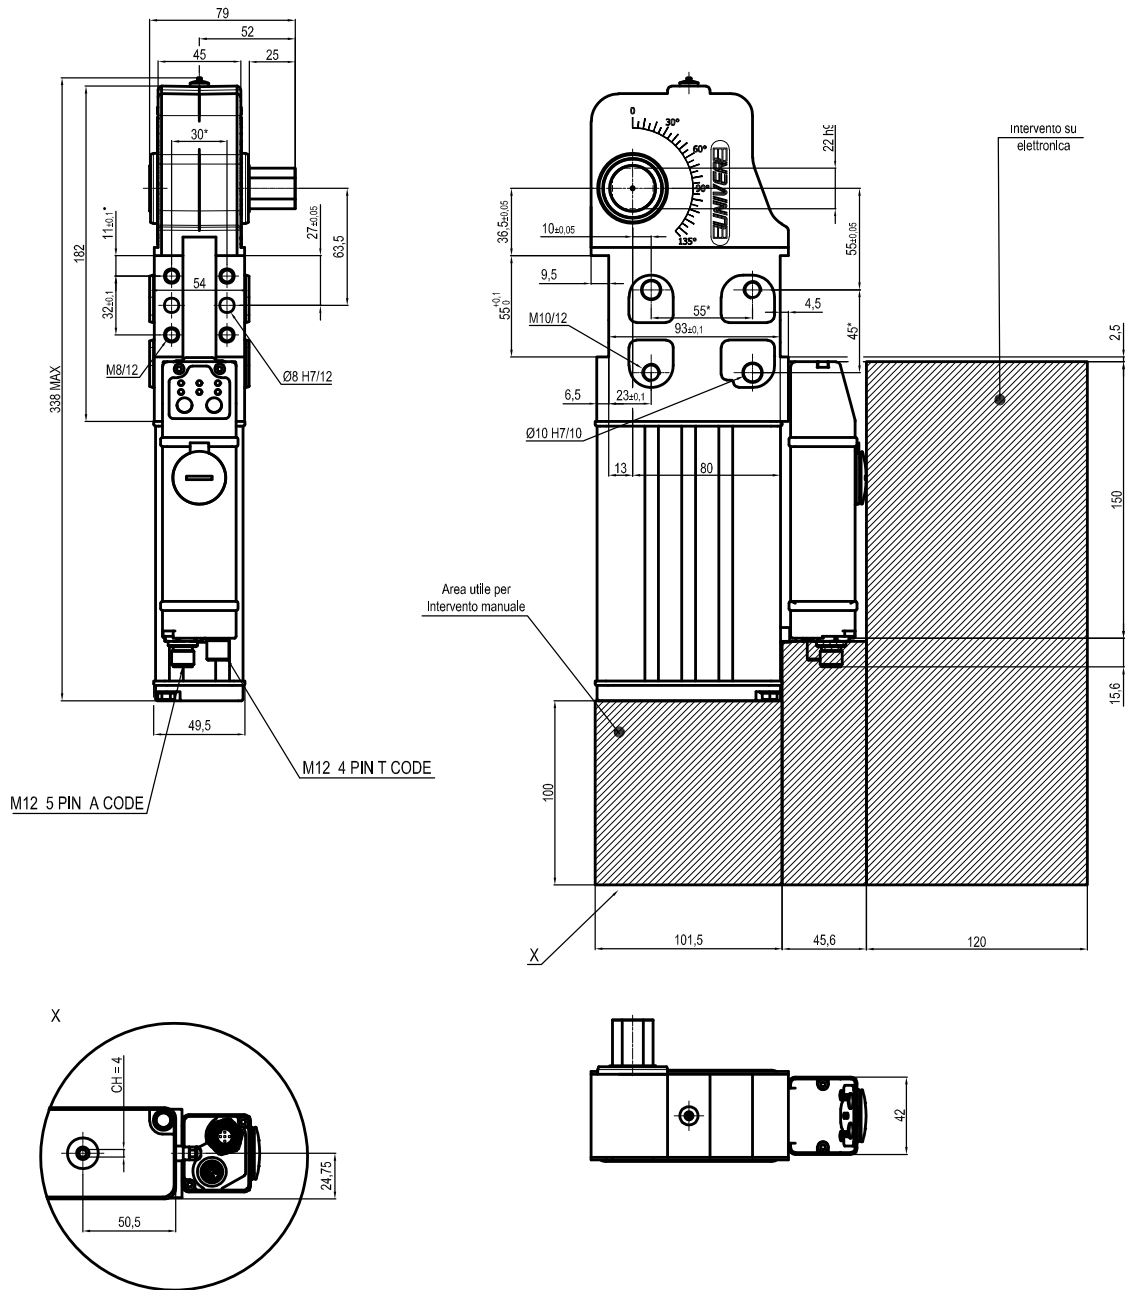

Size	Clamping moment	Closing time**	Weight
350	330 Nm	1,4 sec x 90°	3,6 Kg

Operating temperature: 5° ÷ 40° C
 Without arm
 IP code: IP 65

* : TOLERANCE BETWEEN DOWELS ± 0.02, BETWEEN SCREW HOLES ± 0.1
 ** : FOR MORE DETAILS SEE TECHNICAL SPECIFICATIONS

Subject to technical modifications without notice