


CHARACTERISTICS


Ambient temperature	-10 ÷ +90 °C
Fluid	50 µm filtered air, with or without lubrication
Commutation system	poppet
Max pressure	10 bar
Connections	M5, tube Ø4
Nominal bore (mm)	2,5
Nominal flow rate (NI/min)	70
Valve body	zamak
Seals	NBR
Spool	nickel-plated brass

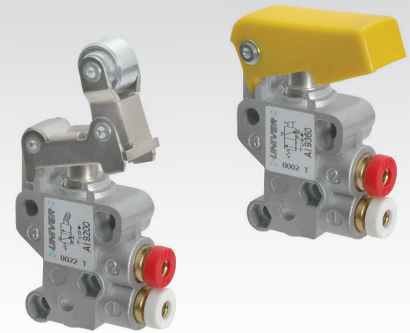

Ball push - spring

■ Tube Ø4


■ M5



AI-9000

AI-9010

AI-9020



AI-9000M


AI-9010M

AI-9020M

Roller lever - spring

■ Tube Ø4


■ M5



AI-9100

AI-9110

AI-9120



AI-9100M


AI-9110M

AI-9120M

One-way roller lever - spring

■ Tube Ø4


■ M5



AI-9200

AI-9210

AI-9220



AI-9200M

AI-9210M



AI-9220M

See ATEX Catalogue for types and versions

Bulkhead mechanical push button - spring

■ Tube Ø4


■ M5



AI-9300

AI-9310

AI-9320



AI-9300M


AI-9310M

AI-9320M

Button lever - spring

■ Tube Ø4


■ M5



AI-9350

AI-9360

AI-9370



AI-9350M


AI-9360M

AI-9370M

Mechanical push button for panel operation - spring

■ Tube Ø4


■ M5



AI-9400

AI-9410

AI-9420



AI-9400M

AI-9410M

AI-9420M

AI-3511Q ■	AI-3514Q ■	AI-3515Q ■	AI-3520Q ■	AI-3524Q ■	AI-3522Q ■ (2 pos.)	AI-3525Q ■	AI-3526Q ■
AI-3512Q ■	AI-3516Q ■	AI-3517Q ■	AI-3521Q ■				
AI-3513Q ■	AI-3514QD ■	AI-3519Q ■			AI-3523Q ■		
	AI-3516QD ■						