

* : TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

** : AREA TO ACCESS ANGLE ADJUSTMENT

***: DIMENSIONS TO BE RESPECTED IN CASE OTHER MANUAL LEVERS ARE USED

Size	Holding moment	Clamping moment	Weight (clamping arm not included)
63	1750 Nm	420 Nm	2,95 Kg

Operating temperature: 5° ÷ 45° C

Opening angle: **adjustable**

Without arm

With hand lever


Electronic sensor with M12 swivel connector, from 0° to 90°

Supply voltage: **10 ÷ 30 Vdc**

IP code: **IP 65**

Subject to technical modifications without notice

Rev. 00 19.09.19

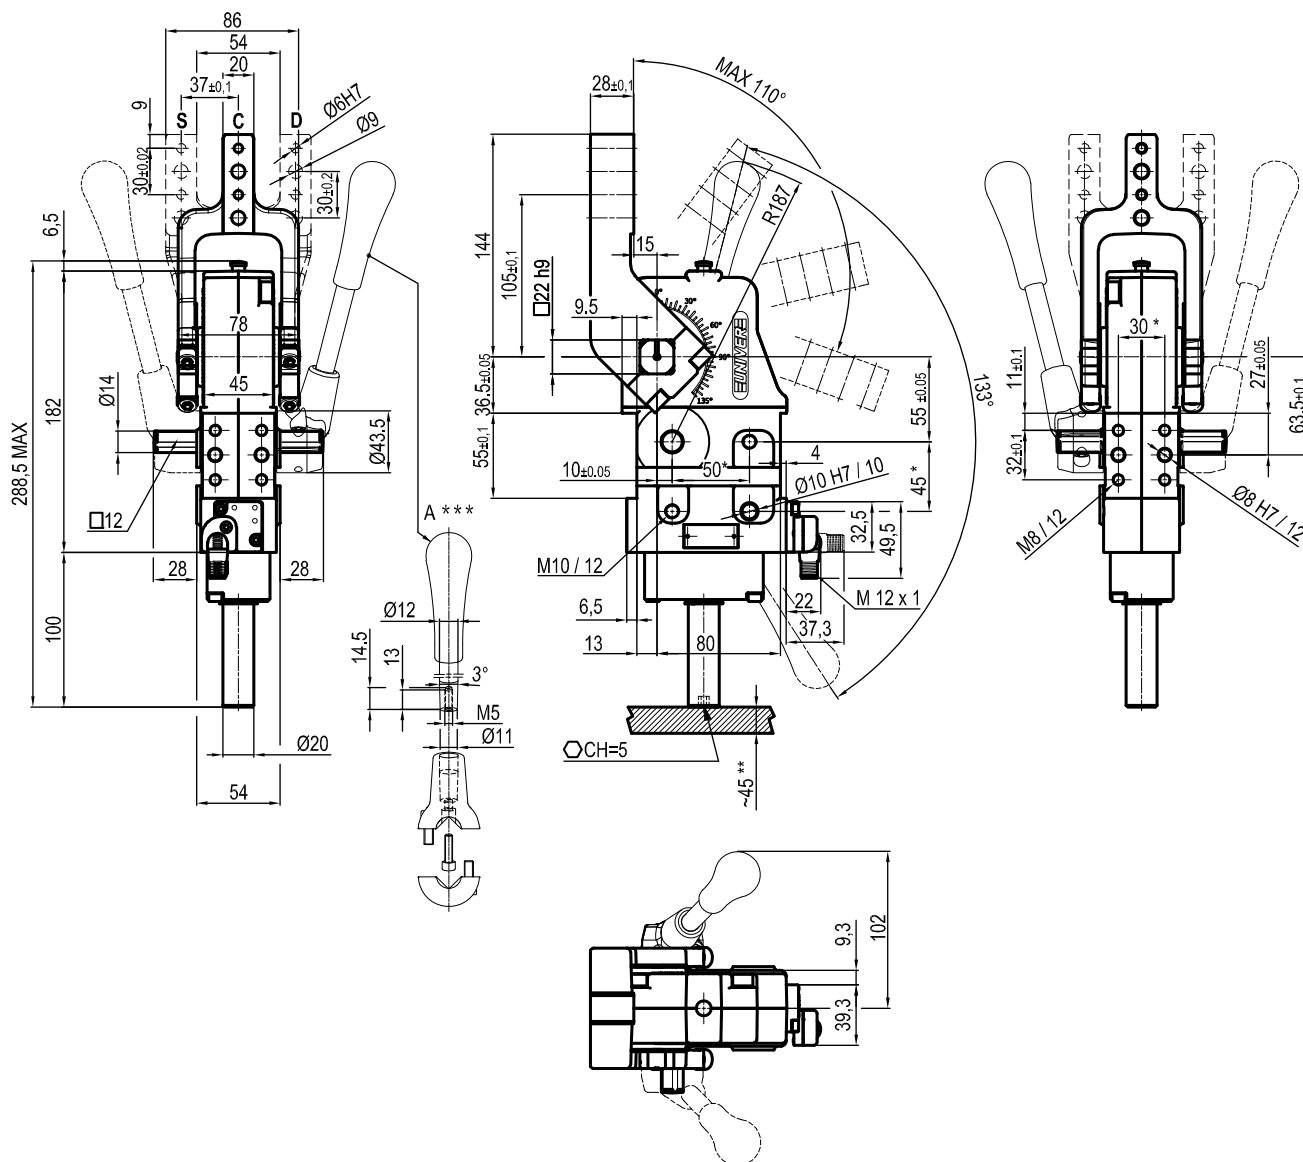

* : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

** : AREA TO ACCESS ANGLE ADJUSTMENT

***: DIMENSIONS TO BE RESPECTED IN CASE OTHER MANUAL LEVERS ARE USED

UCBL4630 __ K0
7 ARM STYLE

8 ARM TYPE

7 8


C = Central
D = Right
S = Left

A = Aluminium
S = Steel

Size	Holding moment	Clamping moment	Weight (clamping arm not included)
63	1750 Nm	420 Nm	2,95 Kg

Operating temperature: $5^{\circ} \div 45^{\circ} \text{C}$
 Opening angle: **adjustable from 0° to 110°**
 Arm position: **180°**
 With manual lever
 Electronic sensor with M12 swivel connector, from 0° to 90°
 Supply voltage: **$10 \div 30 \text{ Vdc}$**
 IP code: **IP 65**

Subject to technical modifications without notice

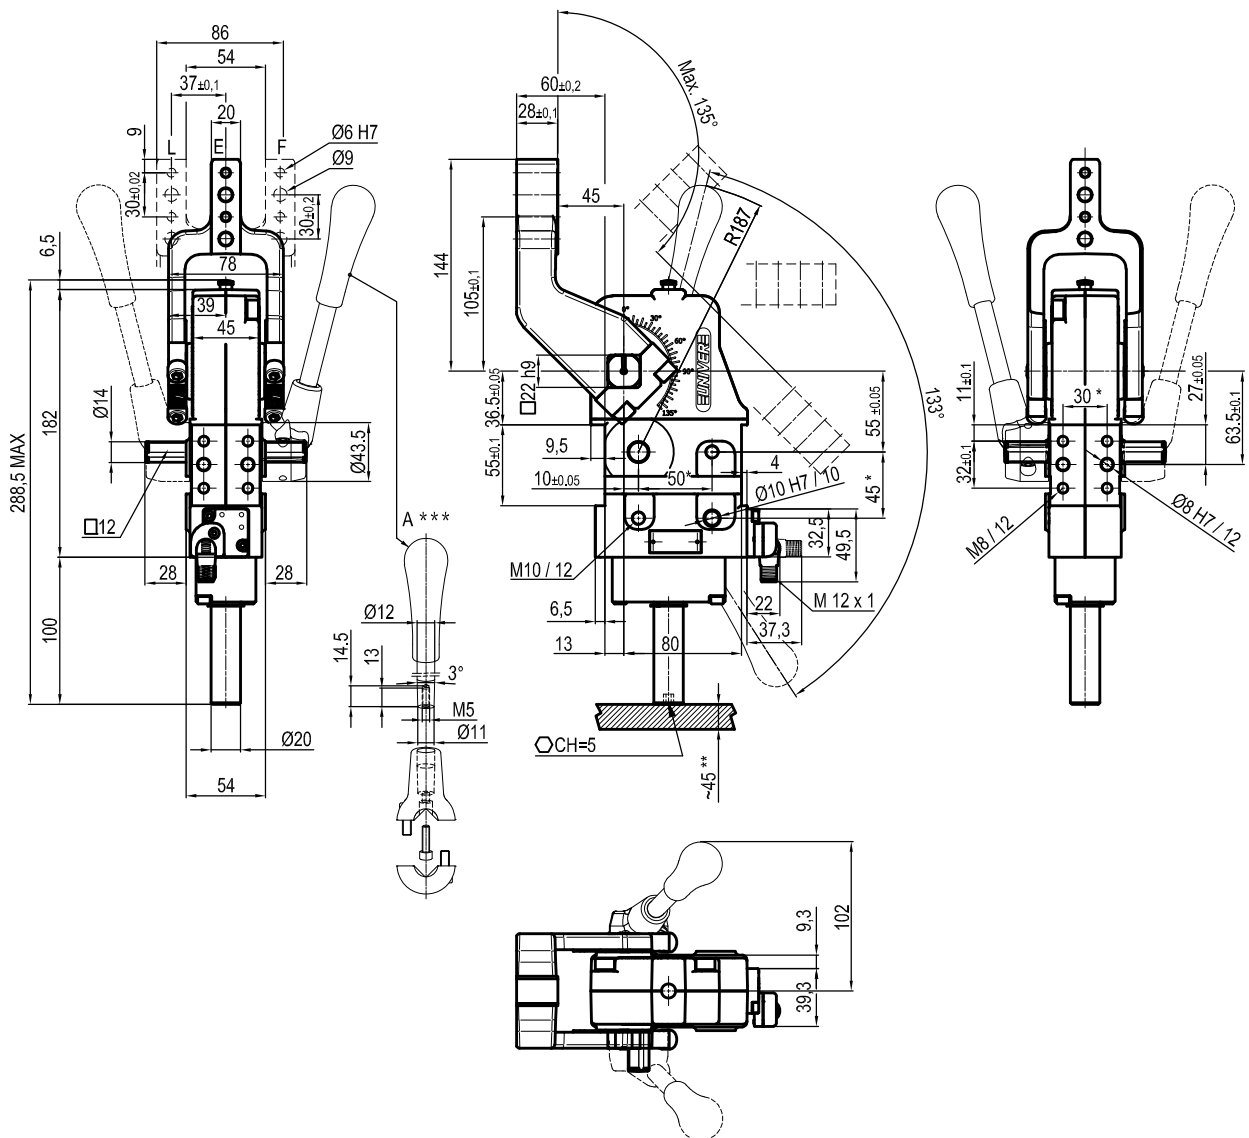

* : TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1
 ** : AREA TO ACCESS ANGLE ADJUSTMENT
 *** : DIMENSIONS TO BE RESPECTED IN CASE OTHER MANUAL LEVERS ARE USED

UCBL4630 __ K0

7 ARM STYLE

8 ARM TYPE

7 8


E = Central
 F = Right
 L = Left

A = Aluminium
 S = Steel

Size	Holding moment	Clamping moment	Weight (clamping arm not included)
63	1750 Nm	420 Nm	2,95 Kg

Operating temperature: 5°÷ 45° C
 Opening angle: **adjustable from 0° to 135°**
 Arm position: **180°**
 With manual lever
 Electronic sensor with M12 swivel connector, from 0° to 90°
 Supply voltage: **10 ÷ 30 Vdc**
 IP code: **IP 65**

Subject to technical modifications without notice

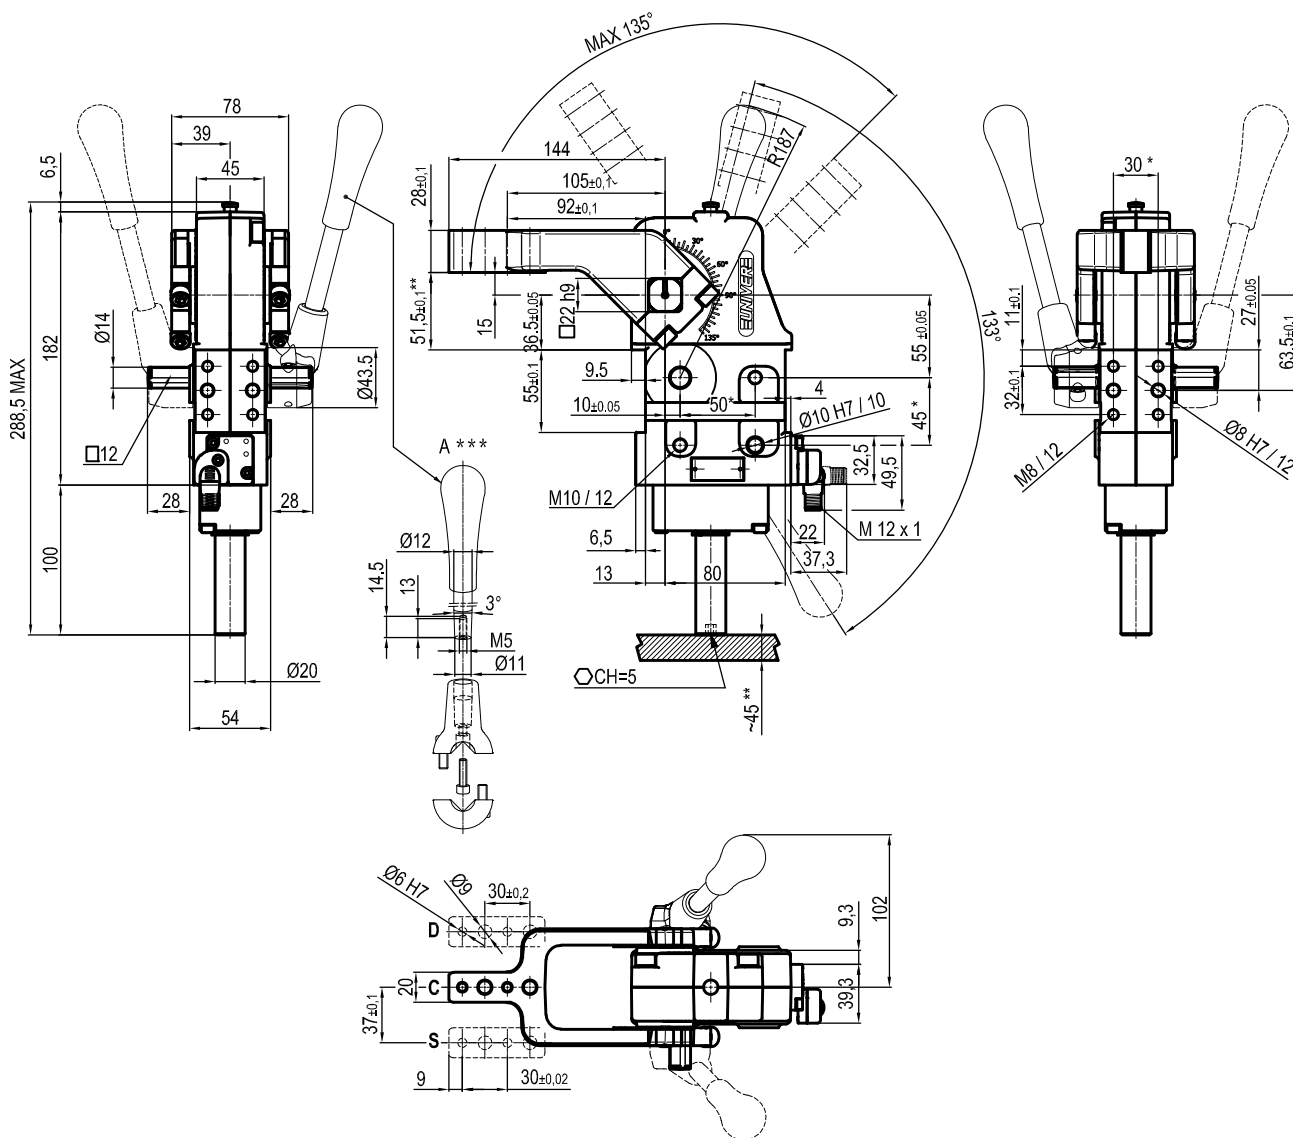

* : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

** : AREA TO ACCESS ANGLE ADJUSTMENT

***: DIMENSIONS TO BE RESPECTED IN CASE OTHER MANUAL LEVERS ARE USED

UCBL463V __ _ K0
7 ARM STYLE

8 ARM TYPE

7 8

C = Central
D = Right
S = Left


A = Aluminium
S = Steel

Size	Holding moment	Clamping moment	Weight (clamping arm not included)
63	1750 Nm	420 Nm	2,95 Kg

Operating temperature: $5^{\circ} \div 45^{\circ} \text{C}$
 Opening angle: **adjustable from 0° to 135°**
 Arm position: **90°**
 With manual lever
 Electronic sensor with M12 swivel connector, from 0° to 90°
 Supply voltage: **$10 \div 30 \text{Vdc}$**
 IP code: **IP 65**

Subject to technical modifications without notice

Rev. 01 26.01.22

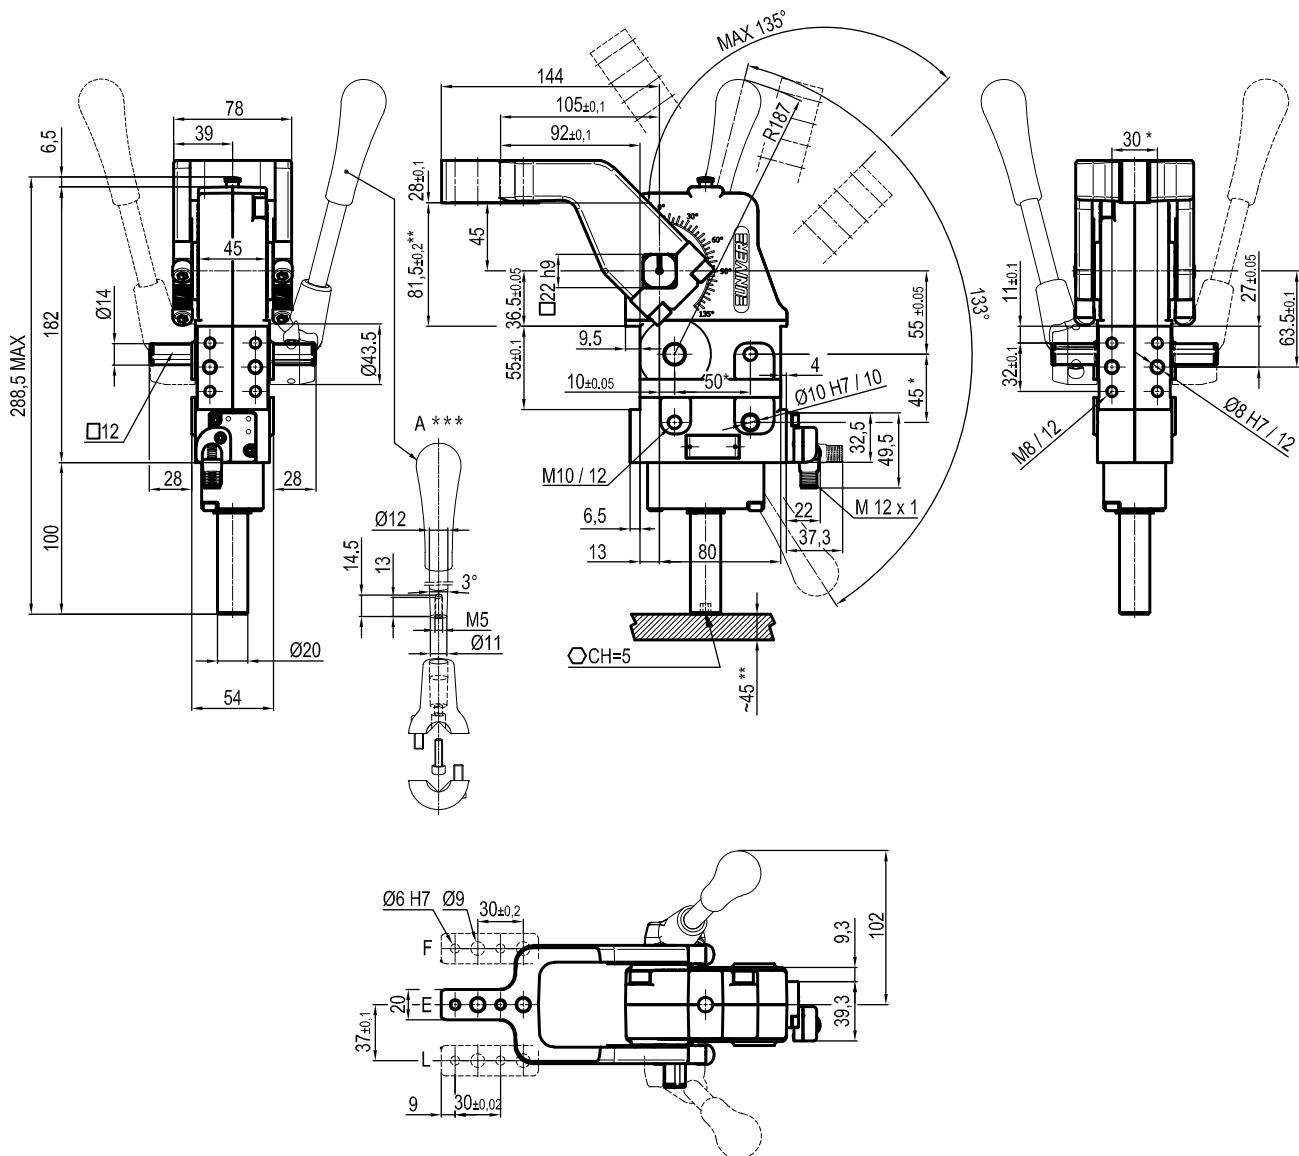

* : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$
 ** : AREA TO ACCESS ANGLE ADJUSTMENT
 *** : DIMENSIONS TO BE RESPECTED IN CASE OTHER MANUAL LEVERS ARE USED

UCBL463V __ _ K0
7 ARM STYLE

8 ARM TYPE

7 8

E = Central
 F = Right
 L = Left

A = Aluminium
 S = Steel

Size	Holding moment	Clamping moment	Weight (clamping arm not included)
63	1750 Nm	420 Nm	2,95 Kg

Operating temperature: $5^{\circ} \div 45^{\circ} \text{C}$
 Opening angle: **adjustable from 0° to 135°**
 Arm position: **90°**
 With manual lever
 Electronic sensor with M12 swivel connector, from 0° to 90°
 Supply voltage: **$10 \div 30 \text{Vdc}$**
 IP code: **IP 65**

Subject to technical modifications without notice