


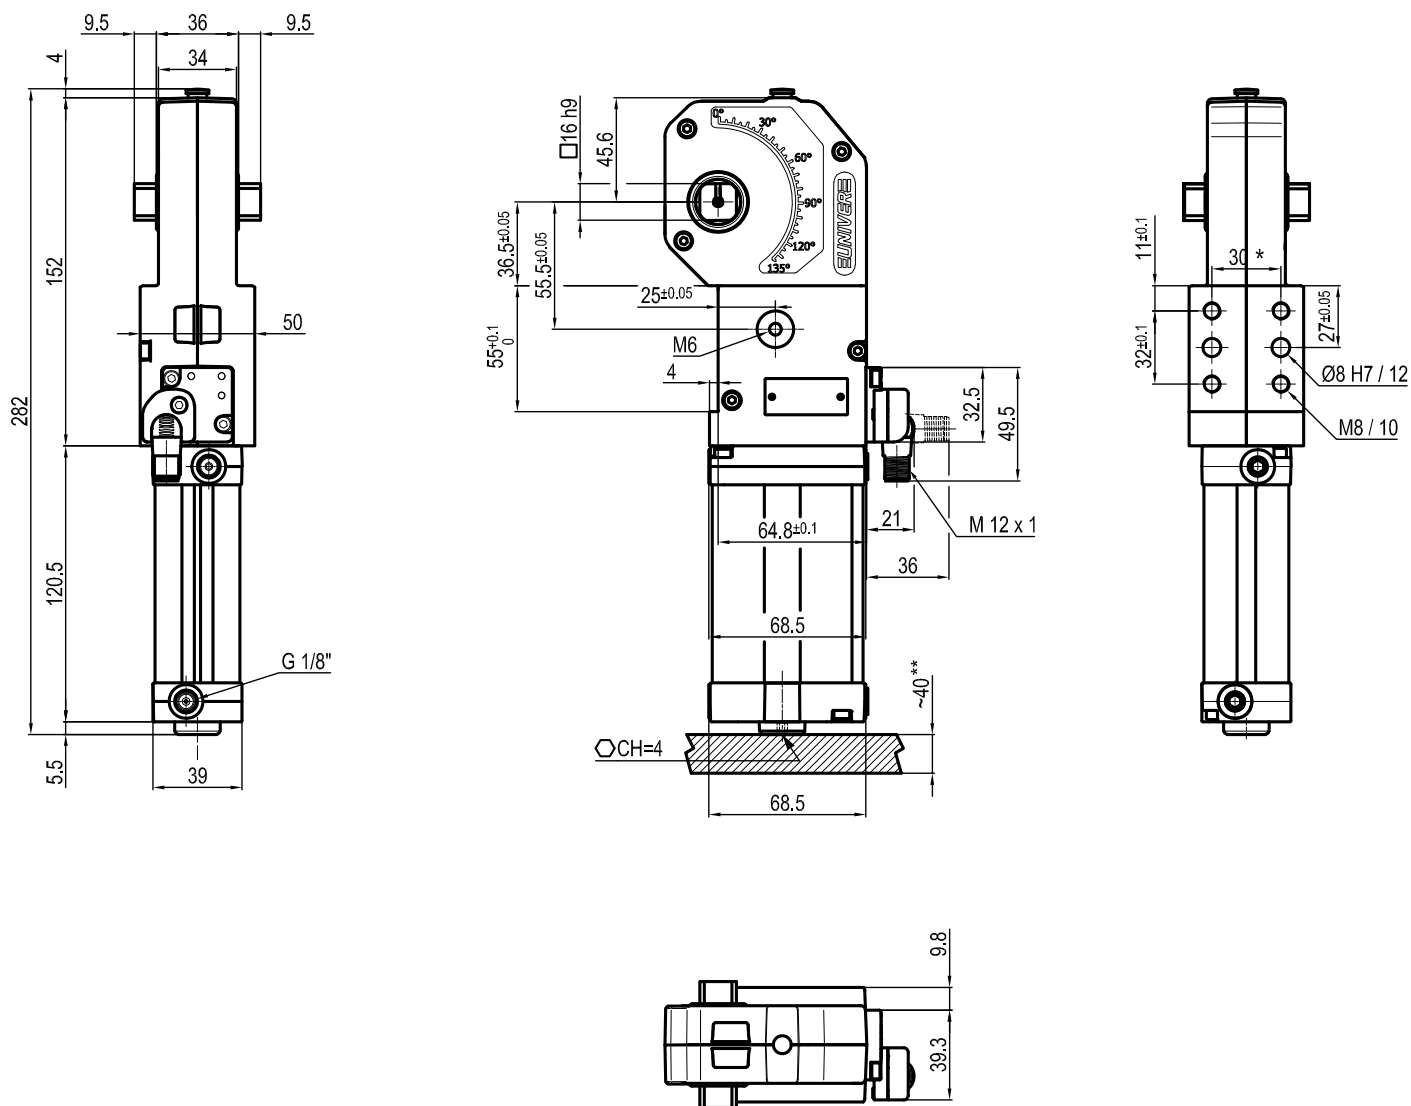

*: TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

** : AREA TO ACCESS ANGLE ADJUSTMENT

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,6 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: $5^{\circ} \div 45^{\circ} \text{C}$

Opening angle: **adjustable**





Without arm

Electronic sensor with M12 swivel connector, from 0° to 90°

Supply voltage: **10 ÷ 30 Vdc**

IP code: **IP 65**

Pneumatic ports on both sides

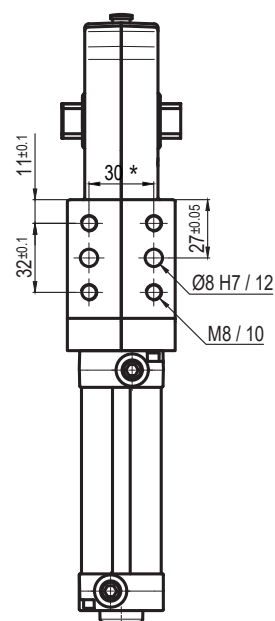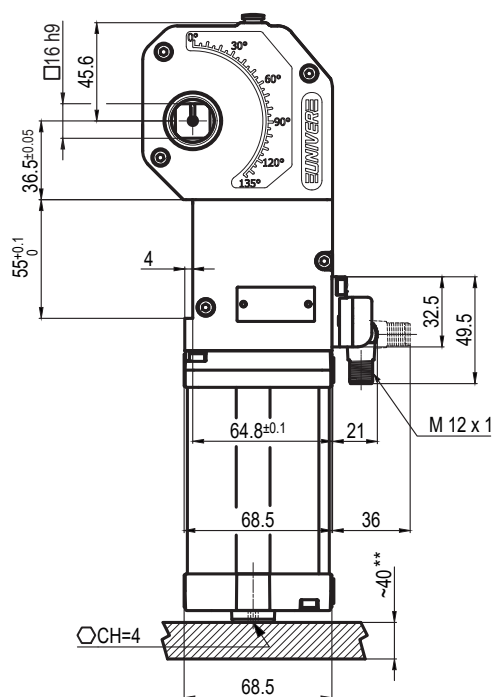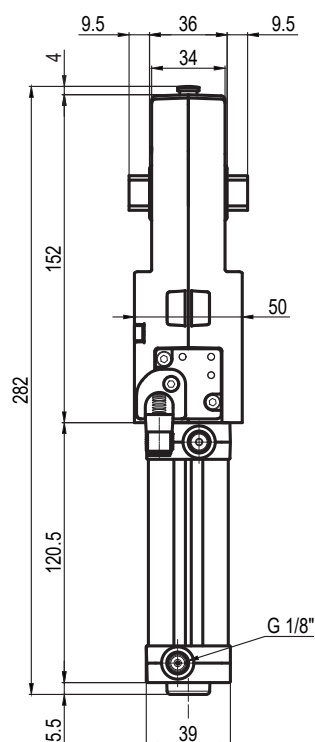

* : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

** : AREA TO ACCESS ANGLE ADJUSTMENT

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,6 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable**


Without arm

Electronic sensor with M12 swivel connector, from 0° to 90°

Supply voltage: **10 ÷ 30 Vdc**

IP code: **IP 65**

Pneumatic ports on both sides

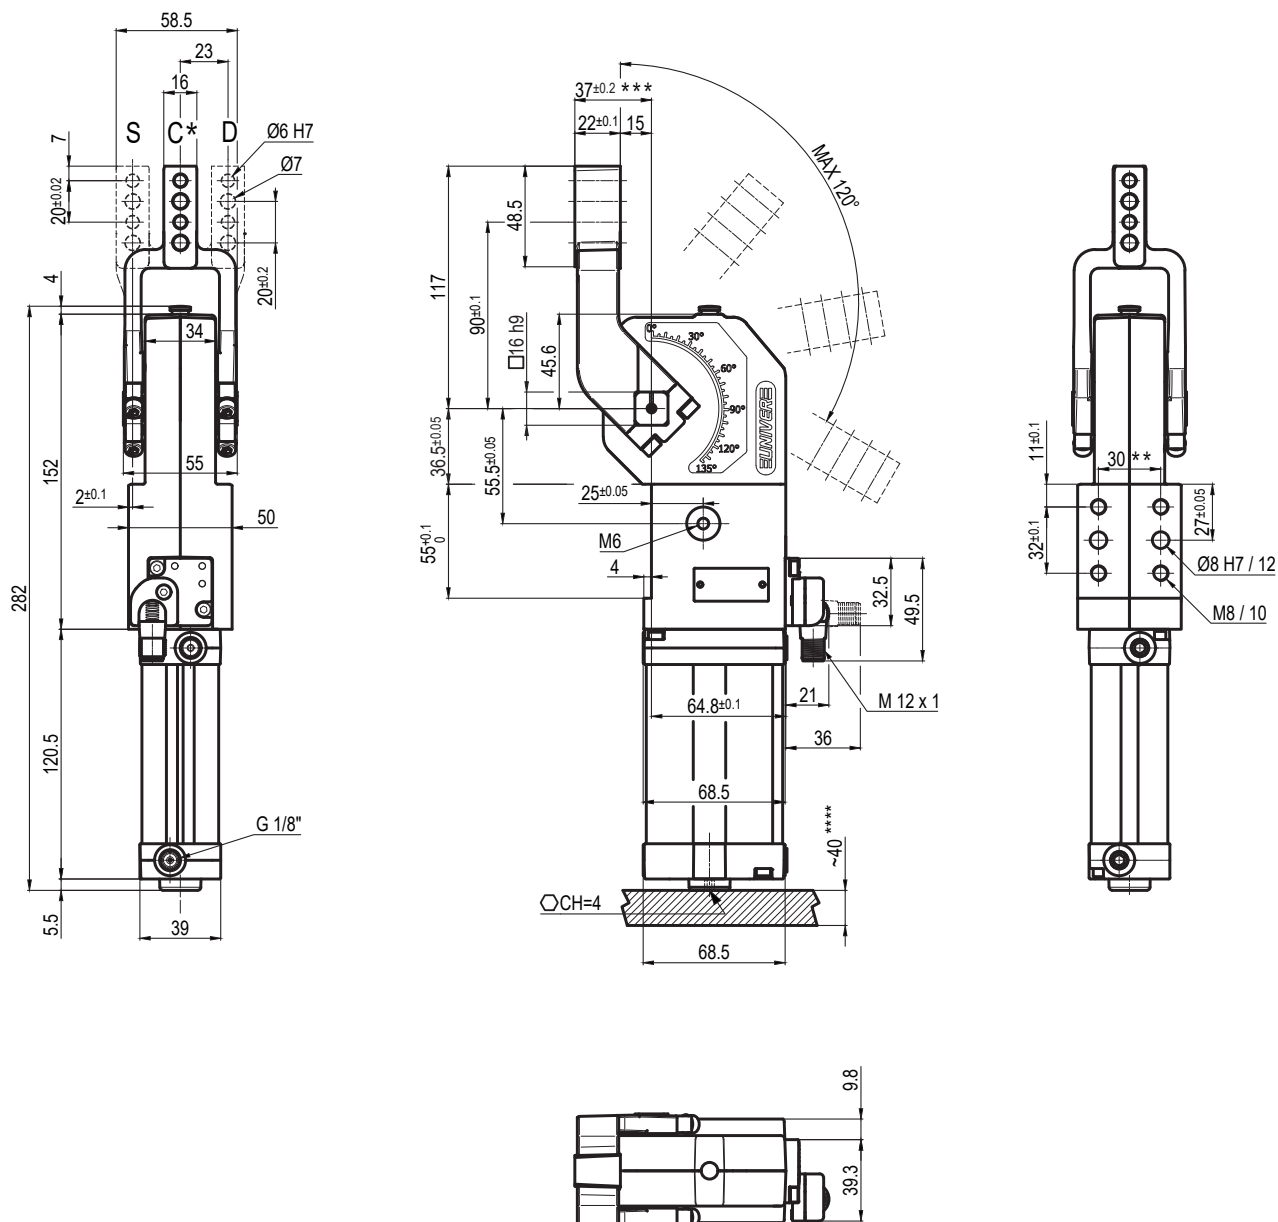

*: "E" CENTRAL - Ø50 / Ø63 mm SIZES COMPATIBLE

**: TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

***: TOLERANCE AT 80 mm FROM PIVOT POINT

****: AREA TO ACCESS ANGLE ADJUSTMENT

UCIP400 _ _ AK0

6 7

6 ARM STYLE

C = Central
S = Right
D = Left

7 ARM TYPE

A = Aluminium
S = Steel

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,6 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable from 0° to 120°**


Arm position: **180°**

Electronic sensor with M12 swivel connector, from 0° to 90°

Supply voltage: **10 ÷ 30 Vdc**

IP code: **IP 65**

Pneumatic ports on both sides

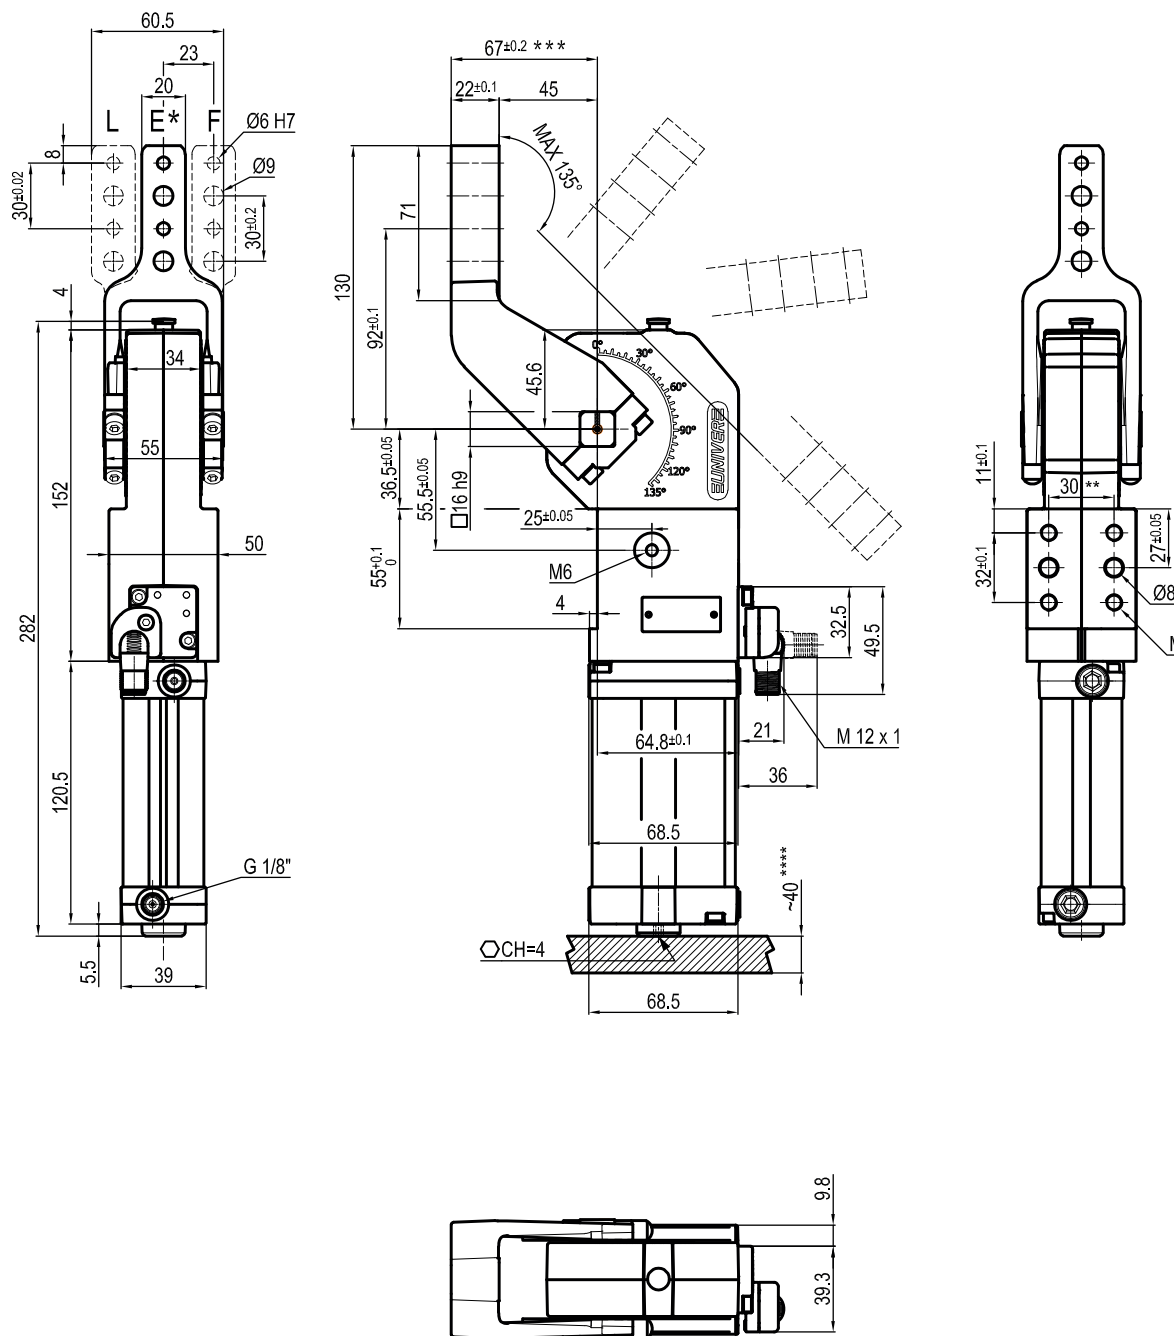

* : "E" CENTRAL - Ø50 / Ø63 mm SIZES COMPATIBLE

** : TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

*** : TOLERANCE AT 80 mm FROM PIVOT POINT

**** : AREA TO ACCESS ANGLE ADJUSTMENT

UCIP400 __ AK0

6 7

6 ARM STYLE

E = Central
F = Right
L = Left

7 ARM TYPE

A = Aluminium
S = Steel

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,6 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable from 0° to 135°**


Arm position: **180°**

Electronic sensor with M12 swivel connector, from 0° to 90°

Supply voltage: **10 ÷ 30 Vdc**

IP code: **IP 65**

Pneumatic ports on both sides

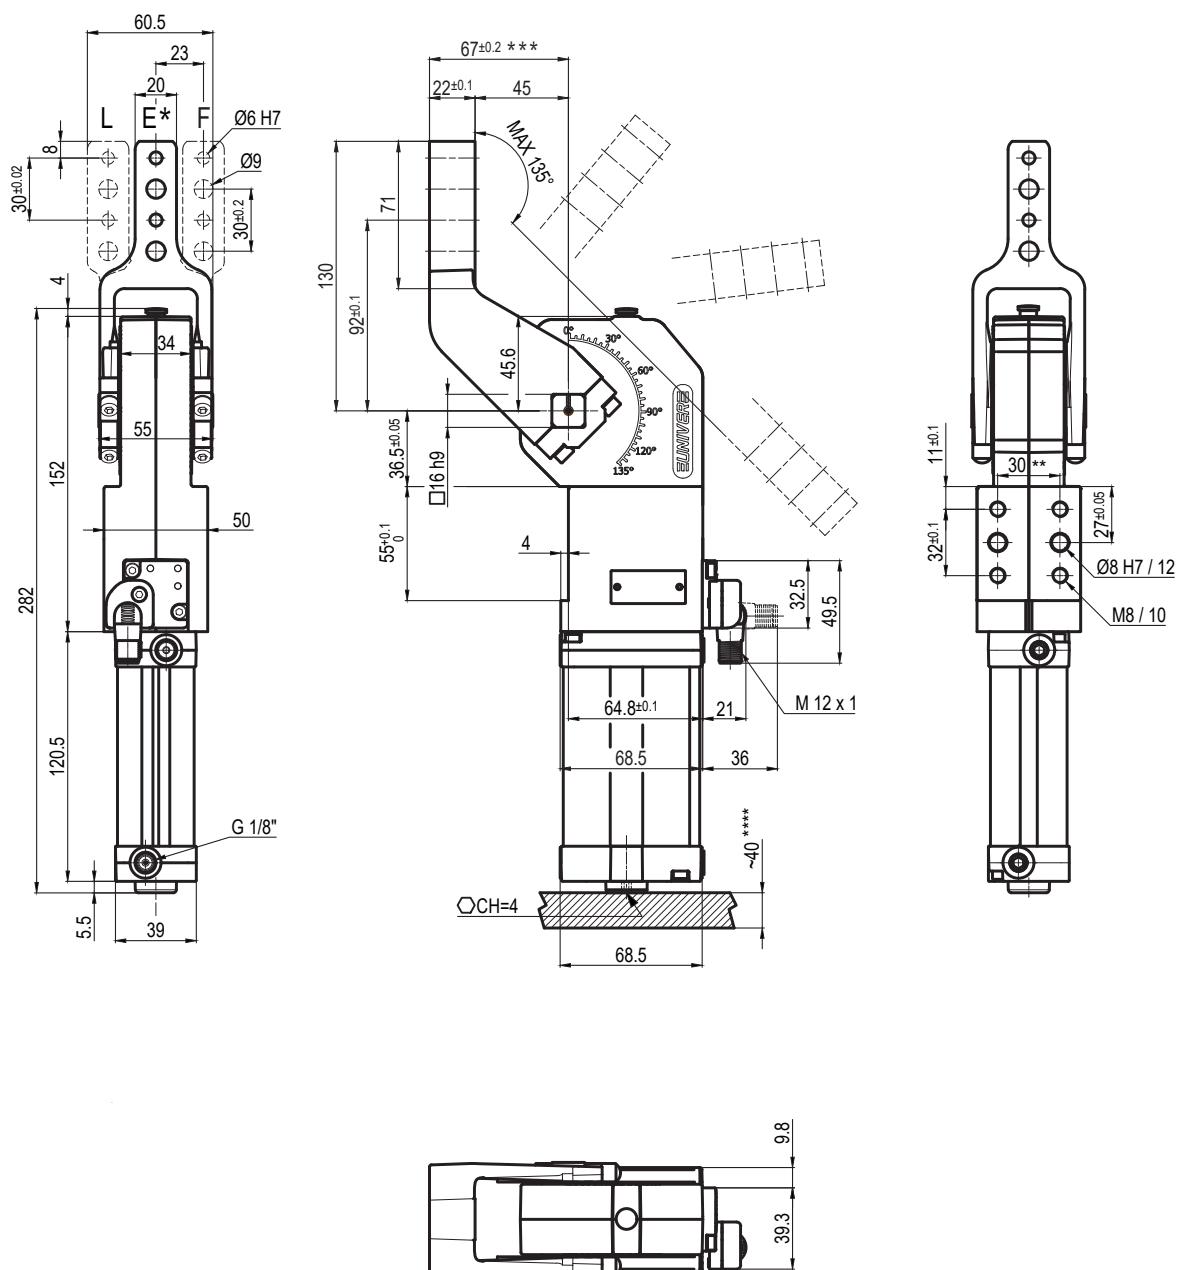

*: "E" CENTRAL - Ø50 / Ø63 mm SIZES COMPATIBLE

** : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

***: TOLERANCE AT 80 mm FROM PIVOT POINT

****: AREA TO ACCESS ANGLE ADJUSTMENT

UCIP400 _ _ NK0

6 7

6 ARM STYLE

E = Central
F = Right
L = Left

7 ARM TYPE

A = Aluminium
S = Steel

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,6 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: 5° ÷ 45° C

Opening angle: **adjustable from 0° to 135°**


Arm position: **180°**

Electronic sensor with M12 swivel connector, from 0° to 90°

Supply voltage: **10 ÷ 30 Vdc**

IP code: **IP 65**

Pneumatic ports on both sides

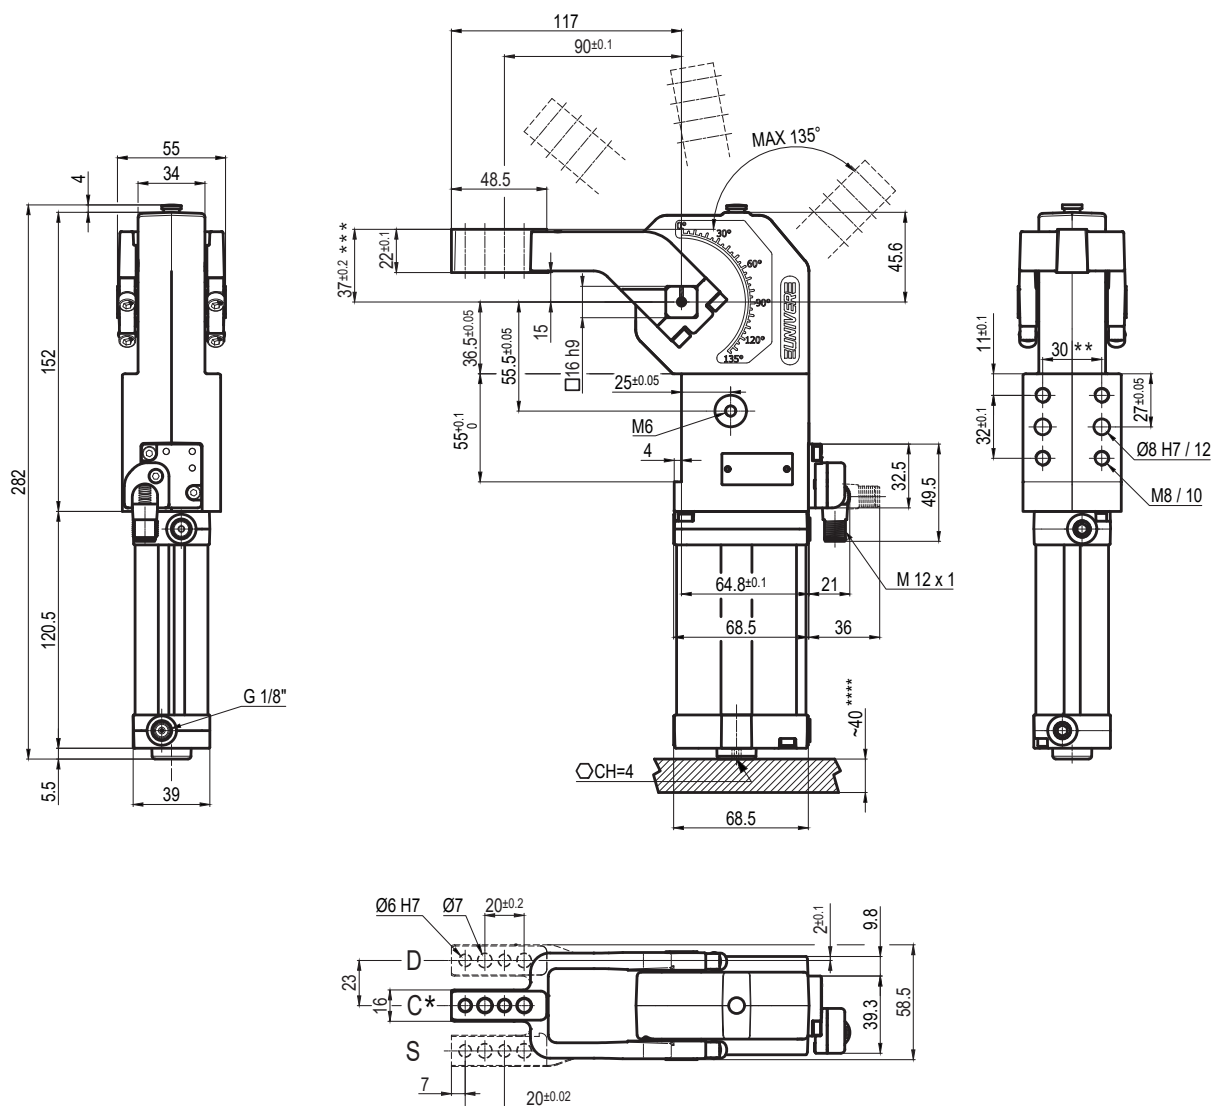

* : "E" CENTRAL - Ø50 / Ø63 mm SIZES COMPATIBLE

**: TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

***: TOLERANCE AT 80 mm FROM PIVOT POINT

**** : AREA TO ACCESS ANGLE ADJUSTMENT

UCIP40V _ _ AK0

6 7

6 ARM STYLE

C = Central
S = Right
D = Left

7 ARM TYPE

A = Aluminium
S = Steel

Bore
Ø

Holding
moment

Clamping moment
(0,5 MPa)

Weight
(clamping arm not included)

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable from 0° to 135°**


Arm position: **90°**

Electronic sensor with M12 swivel connector, from 0° to 90°

Supply voltage: **10 ÷ 30 Vdc**

IP code: **IP 65**

Pneumatic ports on both sides

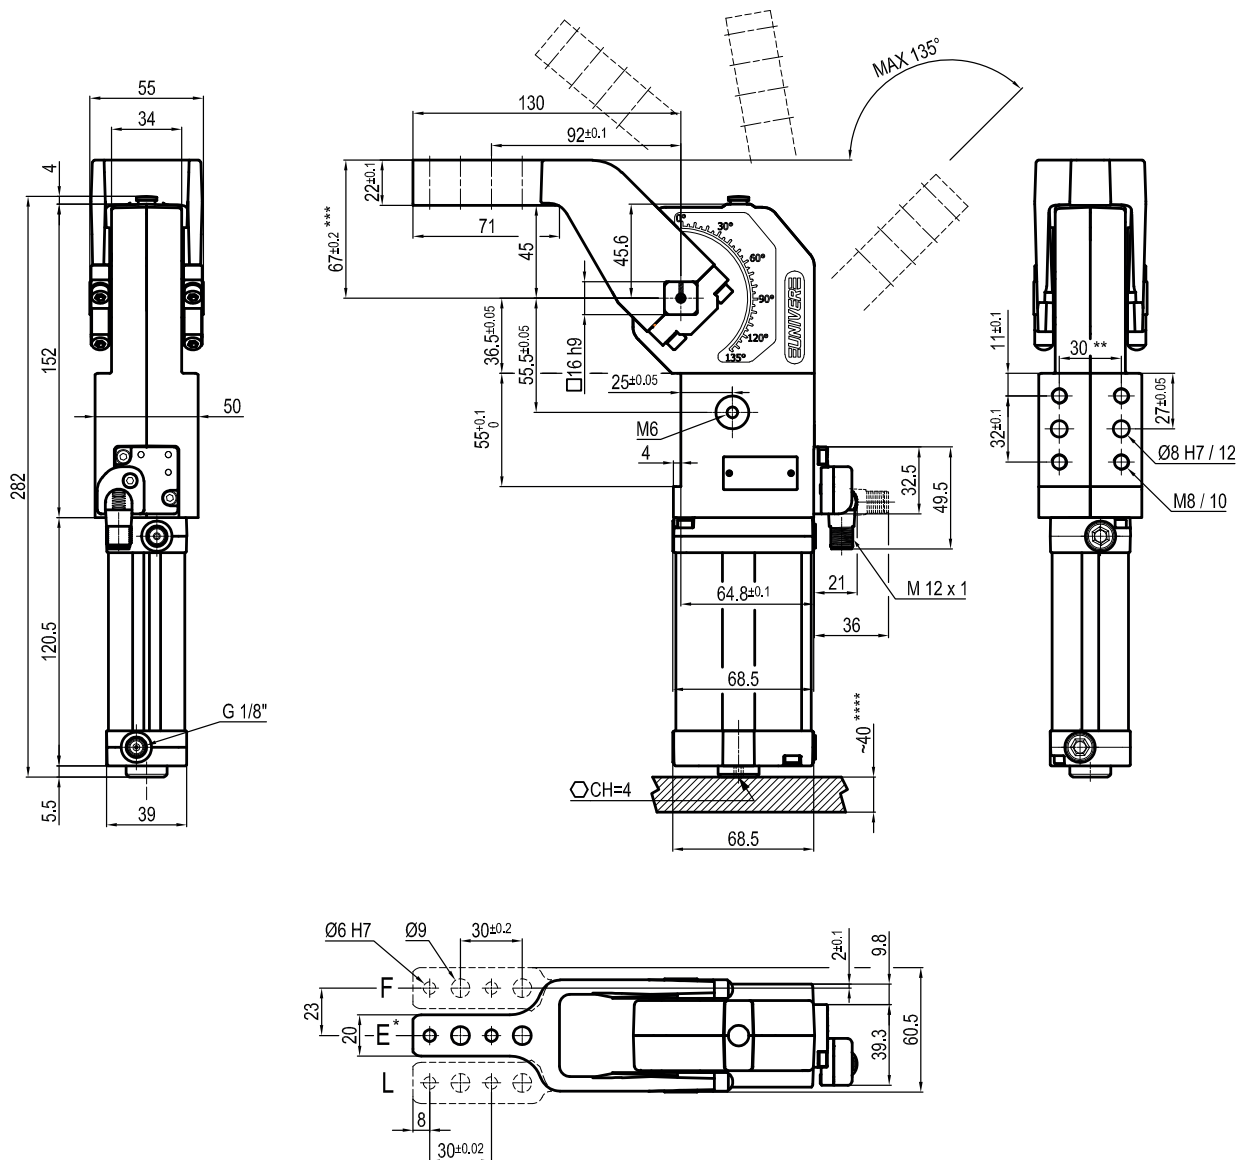

* : "E" CENTRAL - Ø50 / Ø63 mm SIZES COMPATIBLE

** : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

*** : TOLERANCE AT 80 mm FROM PIVOT POINT

**** : AREA TO ACCESS ANGLE ADJUSTMENT

UCIP40V __ AK0

6 7

6 ARM STYLE

E = Central
F = Right
L = Left

7 ARM TYPE

A = Aluminium
S = Steel

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,6 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable from 0° to 135°**


Arm position: **90°**

Electronic sensor with M12 swivel connector, from 0° to 90°

Supply voltage: **10 ÷ 30 Vdc**

IP code: **IP 65**

Pneumatic ports on both sides

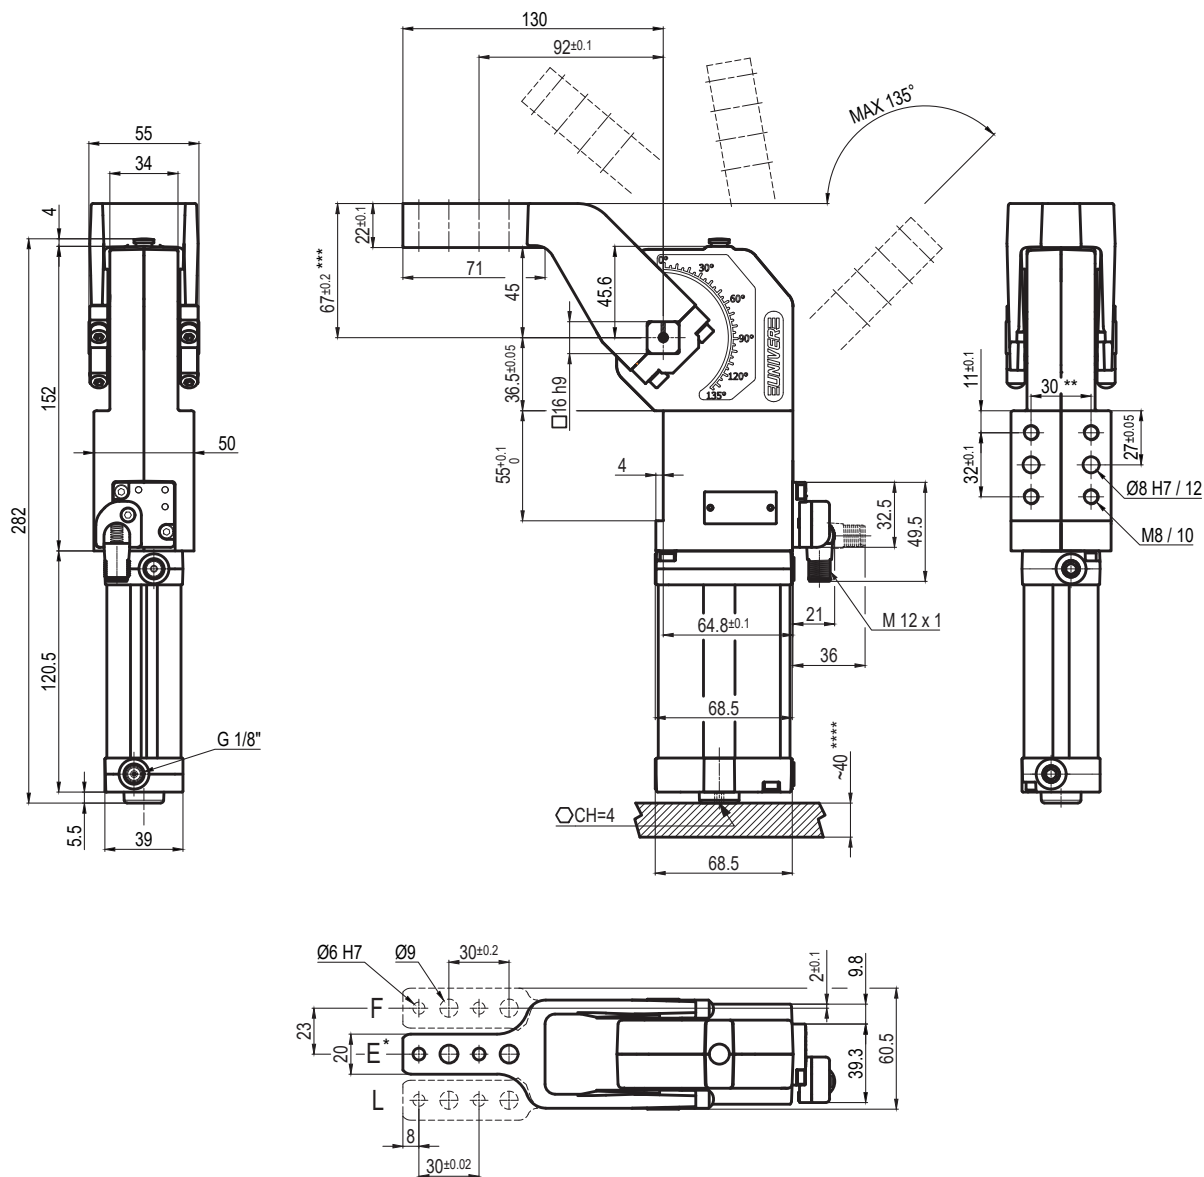

* : "E" CENTRAL - Ø50 / Ø63 mm SIZES COMPATIBLE

** : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$

*** : TOLERANCE AT 80 mm FROM PIVOT POINT

**** : AREA TO ACCESS ANGLE ADJUSTMENT

UCIP40V __ NK0

6 ARM STYLE

7 ARM TYPE

6 7

E = Central
F = Right
L = Left

A = Aluminium
S = Steel

Bore Ø	Holding moment	Clamping moment (0,5 MPa)	Weight (clamping arm not included)
40 mm	600 Nm	170 Nm	1,6 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**

Operating temperature: **5° ÷ 45° C**

Opening angle: **adjustable from 0° to 135°**

Arm position: **90°**

Electronic sensor with M12 swivel connector, from 0° to 90°

Supply voltage: **10 ÷ 30 Vdc**

IP code: **IP 65**

Pneumatic ports on both sides