


* : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$
 ** : AREA TO ACCESS ANGLE ADJUSTMENT
 ***: SCREW THREAD INSERT

| Bore \varnothing | Holding moment | Clamping moment (0,5 MPa) | Weight (clamping arm not included) |
|--------------------|----------------|---------------------------|------------------------------------|
| 80 mm | 4000 Nm | 1100 Nm | 8,6 Kg |


Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **adjustable**
 Without arm
 Electronic sensor with M12 swivel connector, from 0° to 90°
 Supply voltage: **10 ÷ 30 Vdc**
 IP code: **IP 65**
 Pneumatic ports on both sides

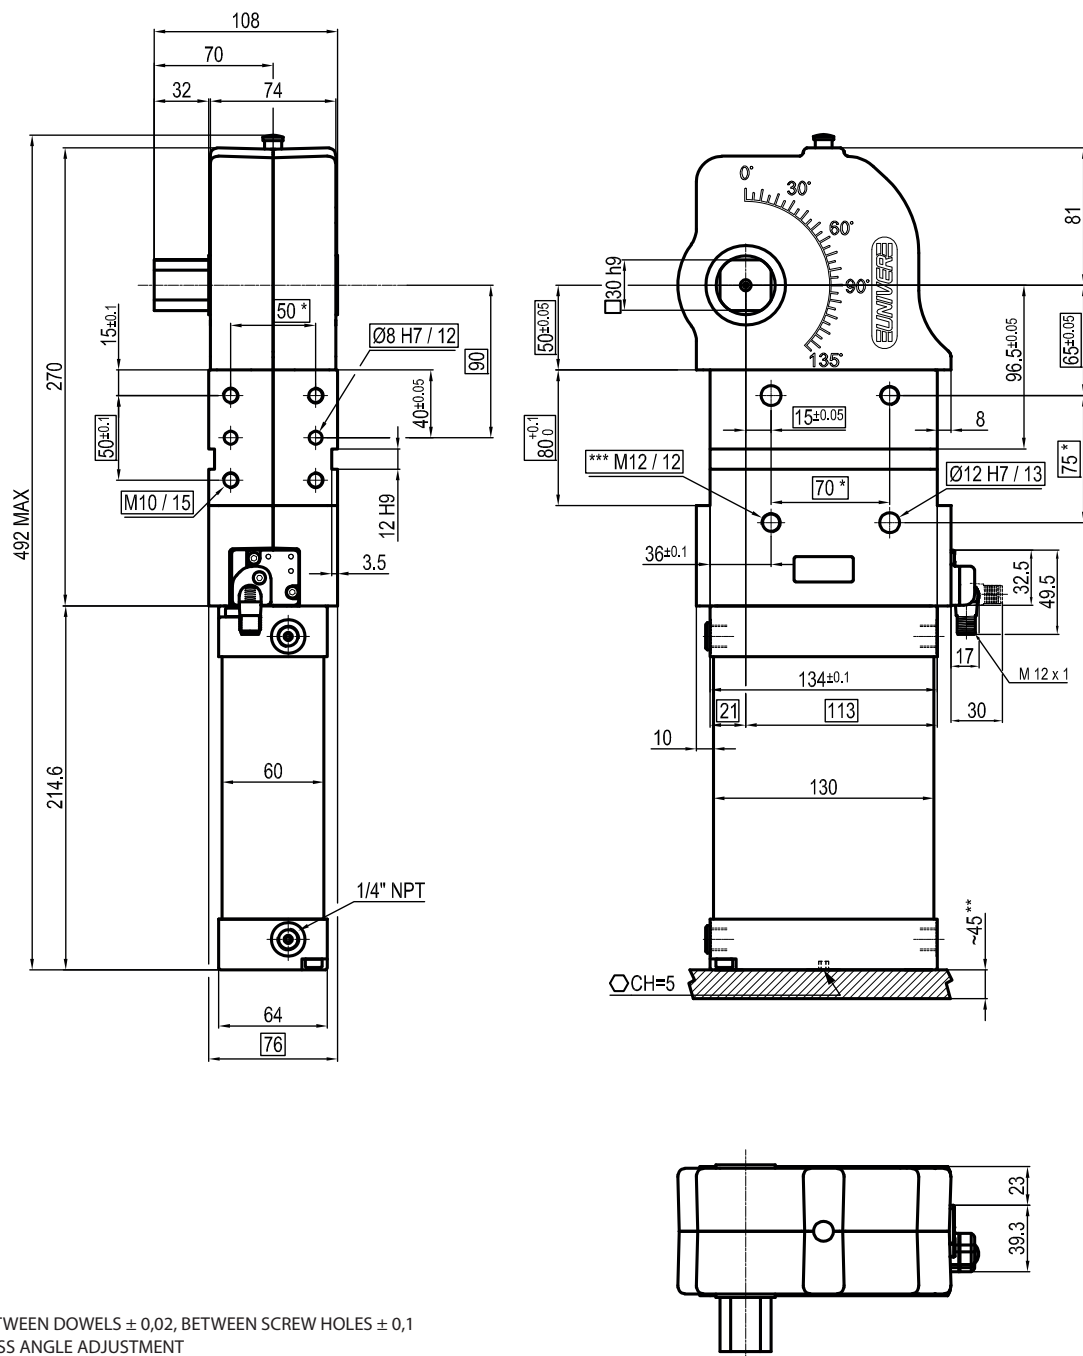

* : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$
 ** : AREA TO ACCESS ANGLE ADJUSTMENT
 ***: SCREW THREAD INSERT

| Bore \varnothing | Holding moment | Clamping moment (0,5 MPa) | Weight (clamping arm not included) |
|--------------------|----------------|---------------------------|------------------------------------|
| 80 mm | 4000 Nm | 1100 Nm | 8,6 Kg |


Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **adjustable**
 Without arm
 Electronic sensor with M12 swivel connector, from 0° to 90°
 Supply voltage: **10 ÷ 30 Vdc**
 IP code: **IP 65**
 Pneumatic ports on both sides

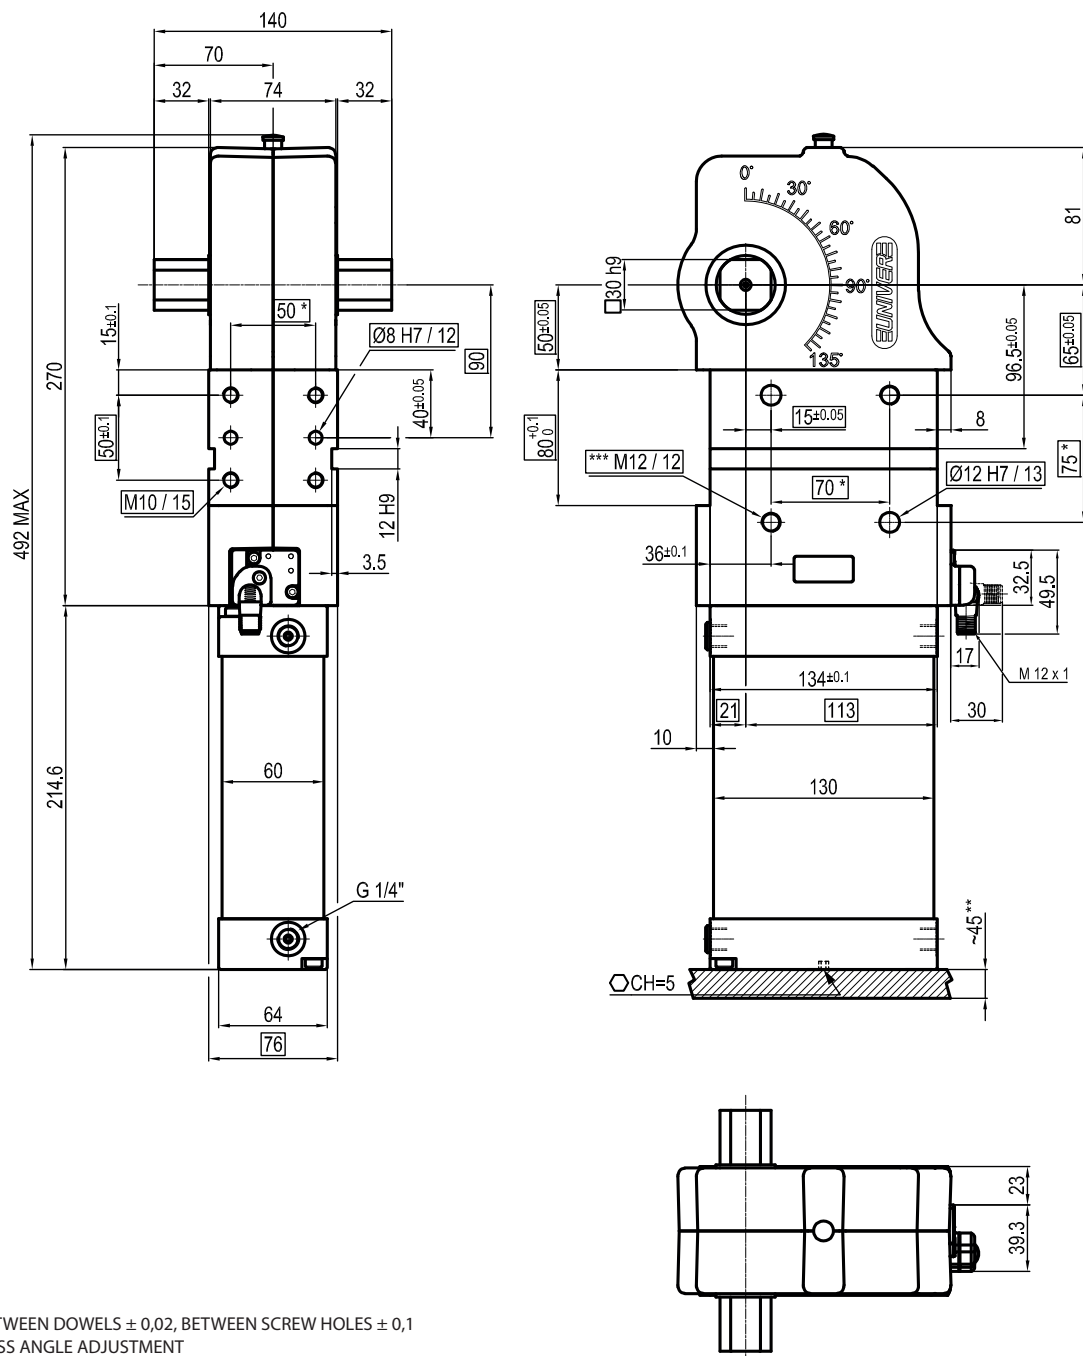

* : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$
 ** : AREA TO ACCESS ANGLE ADJUSTMENT
 ***: SCREW THREAD INSERT

| Bore \varnothing | Holding moment | Clamping moment (0,5 MPa) | Weight (clamping arm not included) |
|--------------------|----------------|---------------------------|------------------------------------|
| 80 mm | 4000 Nm | 1100 Nm | 8,6 Kg |

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **adjustable**
 Without arm
 Electronic sensor with M12 swivel connector, from 0° to 90°
 Supply voltage: **10 ÷ 30 Vdc**
 IP code: **IP 65**
 Pneumatic ports on both sides

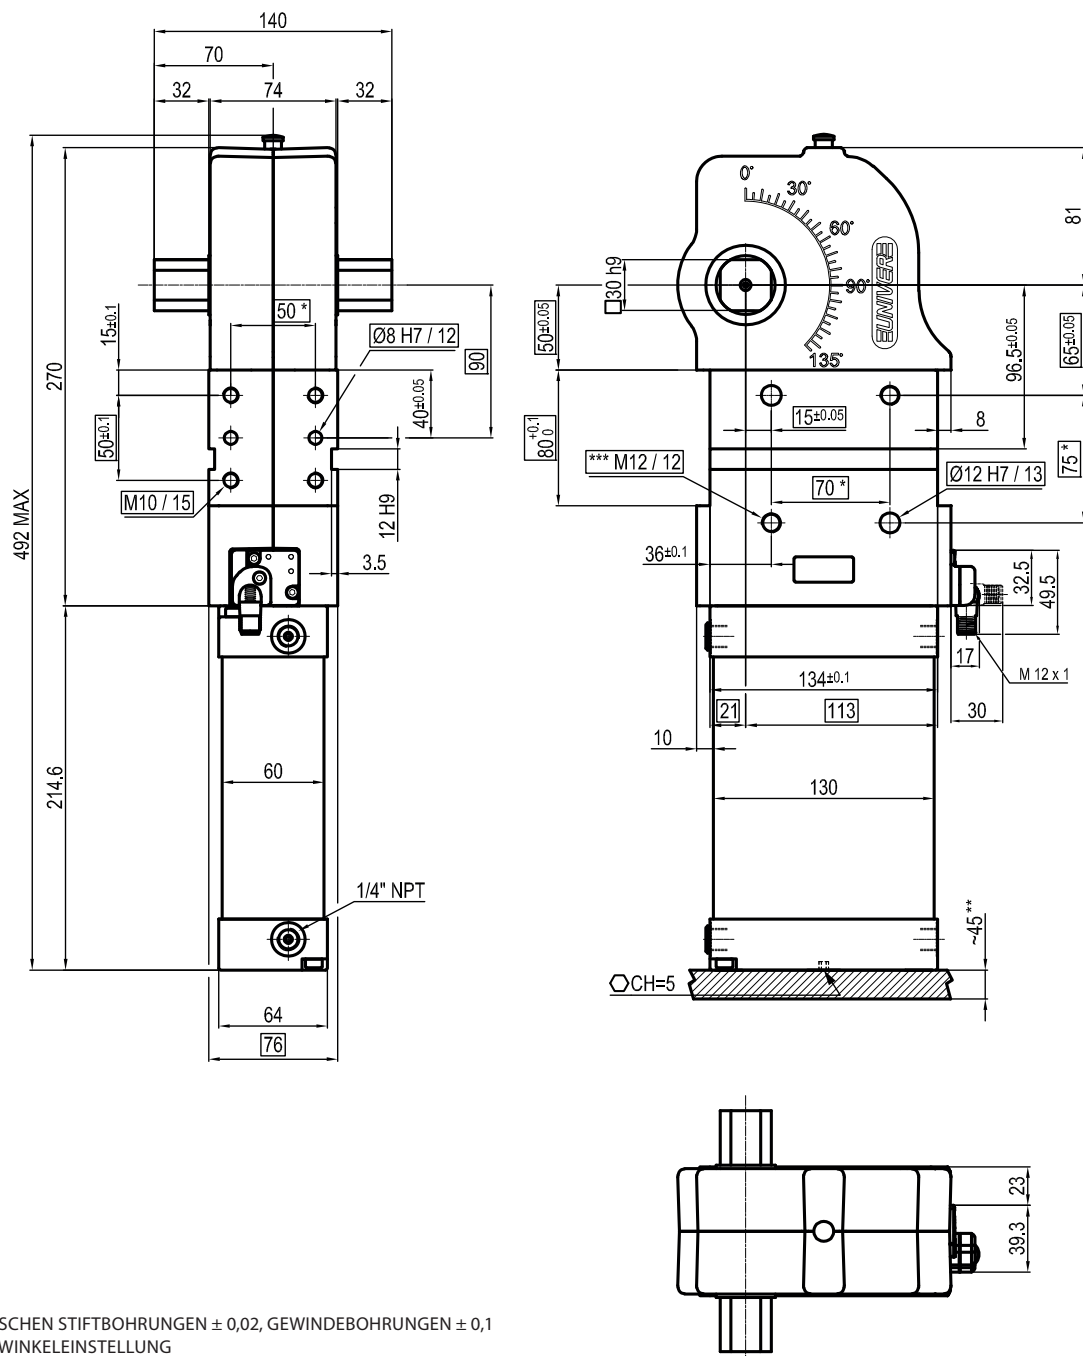


* : TOLERANZ ZWISCHEN STIFTBOHRUNGEN $\pm 0,02$, GEWINDEBOHRUNGEN $\pm 0,1$
 ** : ZUGANG ZUR WINKLEINSTELLUNG
 *** : SCHRAUBGEWINDEEINSATZ

| Durchmesser \varnothing | Haltemoment | Spannmoment (0,5 MPa) | Gewicht (ohne Spannarm) |
|------------------------------|-------------|--------------------------|----------------------------|
| 80 mm | 4000 Nm | 1100 Nm | 8,6 Kg |

Min / Max Betriebsdruck: **0,4 / 0,6 MPa**
 Betriebstemperatur: **5° ÷ 45° C**
 Öffnungswinkel: **einstellbar**


Ohne Arm
 Elektronischer Sensor mit M12 schwenkbarem Stecker,
 von 0° bis 90° orientierbar
 Versorgungsspannung: **10 ÷ 30Vdc**
 Schutzart: **IP65**
 Beidseitige pneumatische Anschlüsse

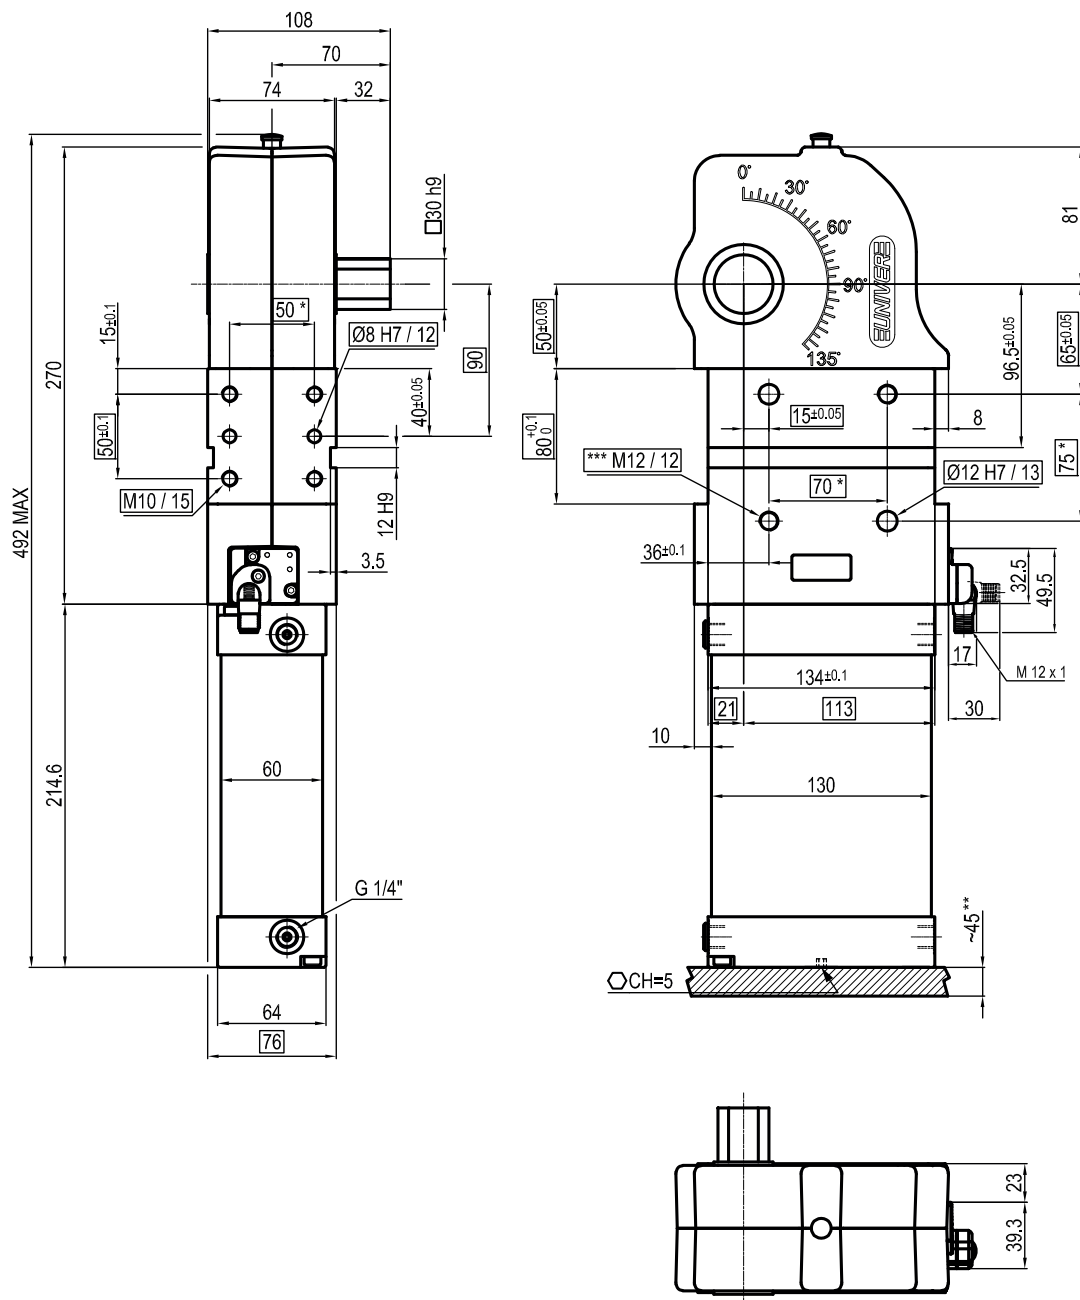

* : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$
 ** : AREA TO ACCESS ANGLE ADJUSTMENT
 ***: SCREW THREAD INSERT

| Bore \varnothing | Holding moment | Clamping moment (0,5 MPa) | Weight (clamping arm not included) |
|--------------------|----------------|---------------------------|------------------------------------|
| 80 mm | 4000 Nm | 1100 Nm | 8,6 Kg |

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **adjustable**
 Without arm
 Electronic sensor with M12 swivel connector, from 0° to 90°
 Supply voltage: **10 ÷ 30 Vdc**
 IP code: **IP 65**
 Pneumatic ports on both sides

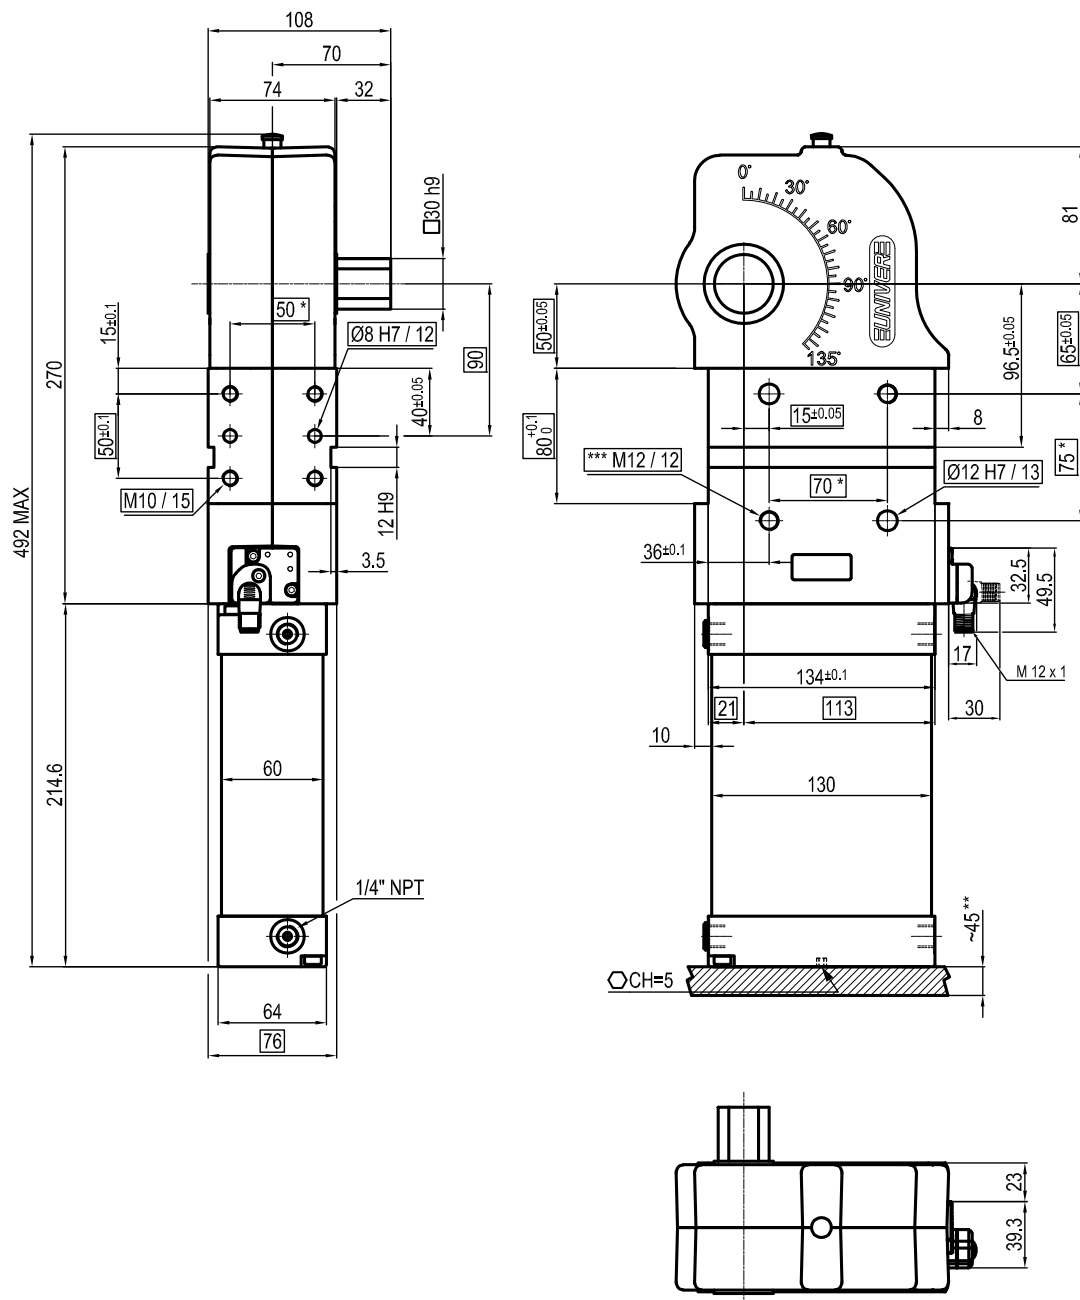

* : TOLERANCE BETWEEN DOWELS $\pm 0,02$, BETWEEN SCREW HOLES $\pm 0,1$
 ** : AREA TO ACCESS ANGLE ADJUSTMENT
 ***: SCREW THREAD INSERT

| Bore \varnothing | Holding moment | Clamping moment (0,5 MPa) | Weight (clamping arm not included) |
|--------------------|----------------|---------------------------|------------------------------------|
| 80 mm | 4000 Nm | 1100 Nm | 8,6 Kg |

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **adjustable**
 Without arm
 Electronic sensor with M12 swivel connector, from 0° to 90°
 Supply voltage: **10 ÷ 30 Vdc**
 IP code: **IP 65**
 Pneumatic ports on both sides