

UPR111373F EE S0

6 PROGRESSIVE NUMBER


6

EE = Standard version
 For special versions progressive numbers are assigned by the Sales dept.

Size	Cylinder	Moment 0,5 MPa	Marking force 0,5 MPa	Weight	Air/cycle 0,5 MPa
1100	200	12500 Nm	64 KN	133 Kg	55,5 NI

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **73°**
 Possibility to orientate the marking surface
 Electronic sensor with M12 swivel connector, from 0° to 90°
 Supply voltage: **10 ÷ 30 Vdc**
 IP code: **IP 65**

* : TOLERANCE BETWEEN DOWEL HOLES ± 0,02, BETWEEN SCREW HOLES ± 0,1

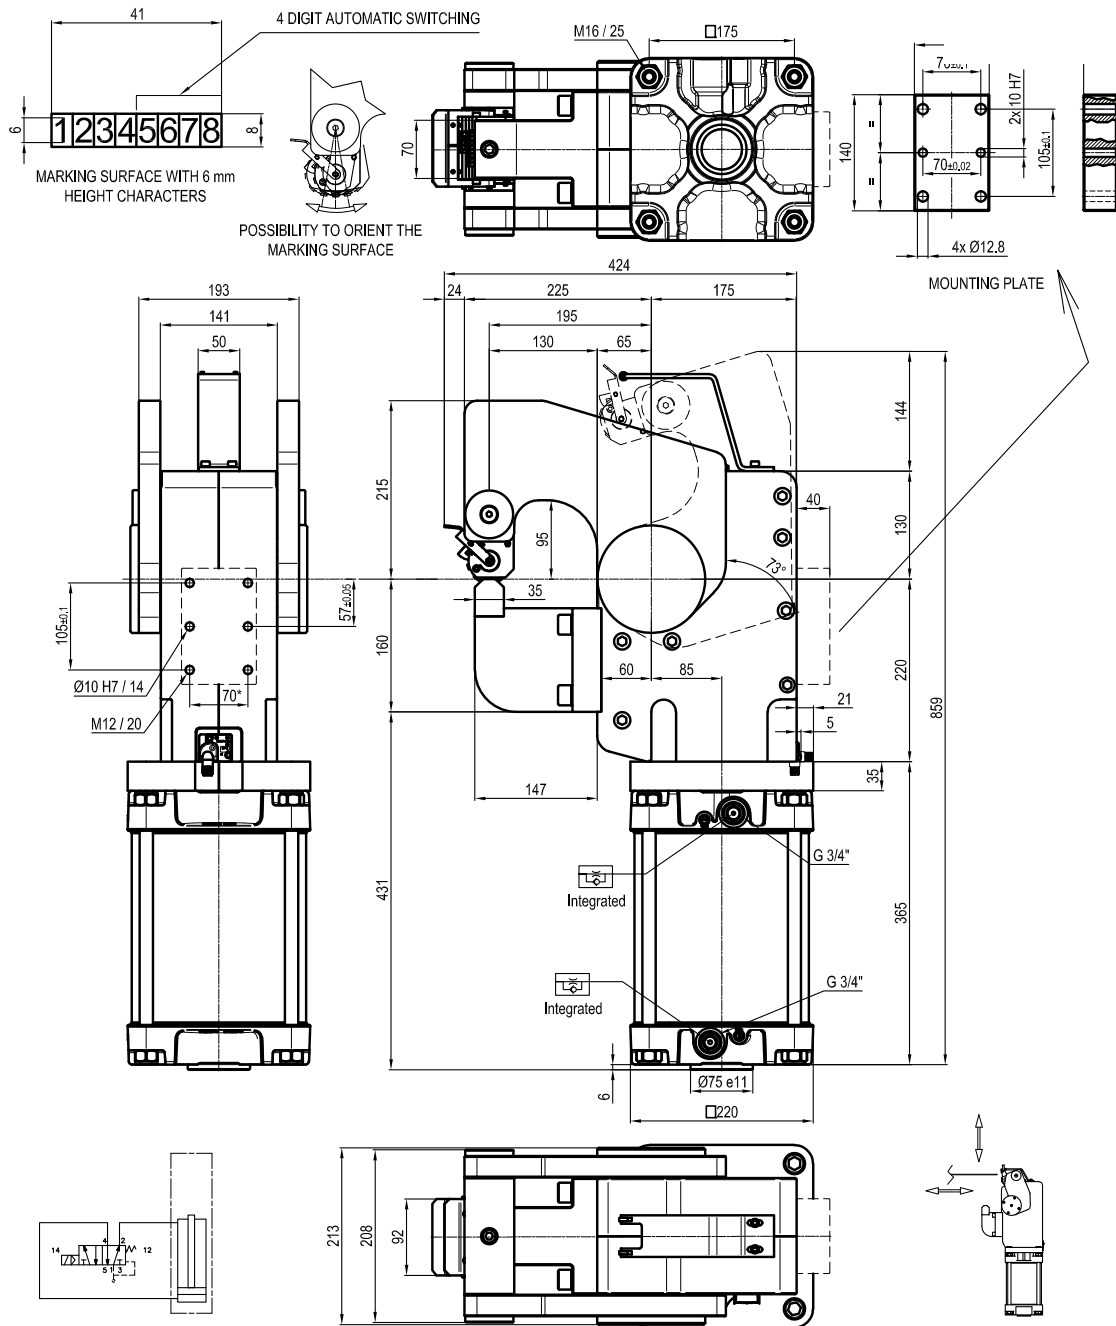

UPR111373M EE S0

6 PROGRESSIVE NUMBER

6

EE = Standard version
 For special versions progressive numbers are assigned by the Sales dept.

Size	Cylinder	Moment 0,5 MPa	Marking force 0,5 MPa	Weight	Air/cycle 0,5 MPa
1100	200	12500 Nm	64 KN	133 Kg	55,5 NI

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Opening angle: **73°**
 Possibility to orientate the marking surface
 Electronic sensor with M12 swivel connector, from 0° to 90°
 Supply voltage: **10 ÷ 30 Vdc**
 IP code: **IP 65**

* : TOLERANCE BETWEEN DOWEL HOLES ± 0,02, BETWEEN SCREW HOLES ± 0,1

Subject to technical modifications without notice