

## USL50J\_0\_\_\_K0

5 7

**5 PIN DIAMETER**

- 1 <= Ø 19 mm
- 2 = Ø 20 mm
- 3 = Ø 25 mm
- 4 = Ø 30 mm
- 5 = Ø 35 mm
- 6 = Ø 40 mm

For pin Ø outside the mentioned range please contact our Sales Dept.

**7 PROGRESSIVE NUMBERING**

Progressive numbers for special products are assigned by the Sales Dept.

Size	Clamping force	Weight with hand lever (reference plate, pin and hook not included)
50	3500 N	3,6 Kg

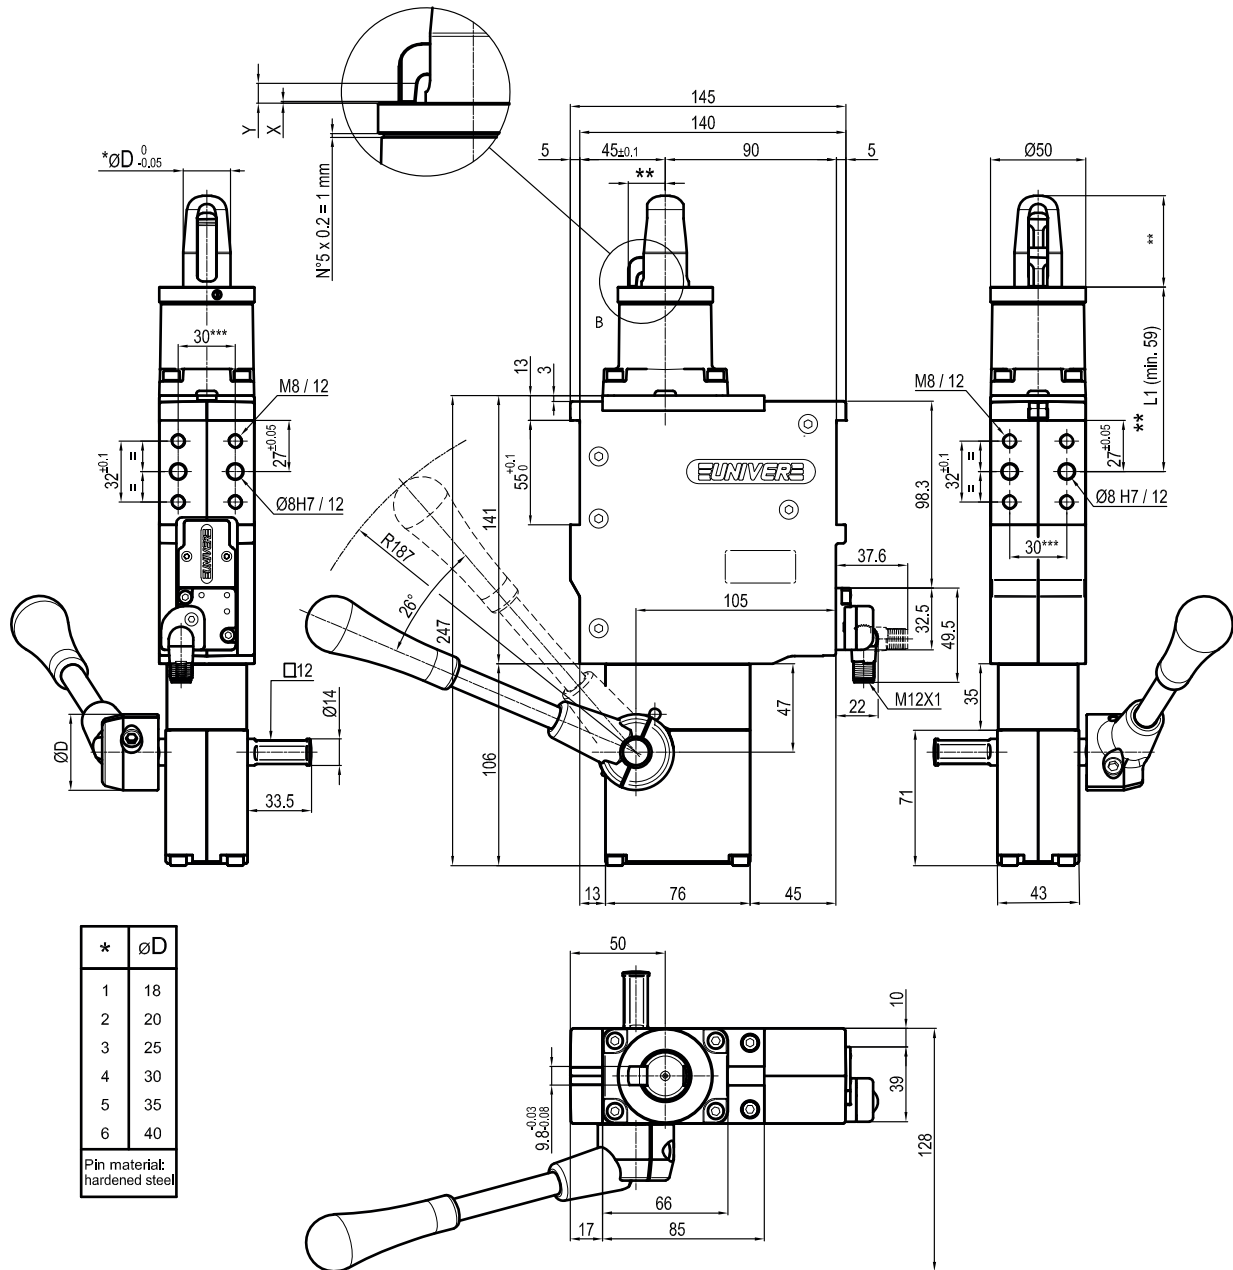
Operating temperature: **5° ÷ 45° C**  
 Electronic sensor with M12 swivel connector, from 0° to 90°  
 Supply voltage: **10 ÷ 30 Vdc**  
 IP code: **IP 65**

\*\* : MISSING DIMENSION TO BE DEFINED ACCORDING TO CUSTOMER SPECIFICATIONS  
 \*\*\* : TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

**X= metal sheet**

**Y = clamping range (X + 2,3 mm Max)**

Subject to technical modifications without notice


**USL50J\_1\_\_\_K0**
**5 7**
**5 PIN DIAMETER**

- 1 = Ø 19 mm
- 2 = Ø 20 mm
- 3 = Ø 25 mm
- 4 = Ø 30 mm
- 5 = Ø 35 mm
- 6 = Ø 40 mm

For pin Ø outside the mentioned range  
please contact our Sales Dept.

**7 PROGRESSIVE NUMBERING**

Progressive numbers for special  
products are assigned by the Sales Dept.

Size	Clamping force	Weight with hand lever (reference plate, pin and hook not included)
50	3500 N	3,6 Kg

Operating temperature: **5° ÷ 45° C**  
 Electronic sensor with M12 swivel connector, from 0° to 90°  
 Supply voltage: **10 ÷ 30 Vdc**  
 IP code: **IP 65**

\*\*: MISSING DIMENSION TO BE DEFINED ACCORDING TO CUSTOMER SPECIFICATIONS  
 \*\*\*: TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

**X = metal sheet**

**Y = clamping range (X + 2,3 mm Max)**

Subject to technical modifications without notice