

USL50J_0_ _ _ K0

5 7

5 PIN DIAMETER

- 1 = ∅ 19 mm
- 2 = ∅ 20 mm
- 3 = ∅ 25 mm
- 4 = ∅ 30 mm
- 5 = ∅ 35 mm
- 6 = ∅ 40 mm

For pin ∅ outside the mentioned range please contact our Sales Dept.

7 PROGRESSIVE NUMBERING

Progressive numbers for special products are assigned by the Sales Dept.

Size	Clamping force	Weight with hand lever (reference plate, pin and hook not included)
50	3500 N	3,6 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° + 45° C**
 Electronic sensor with M12 swivel connector, from 0° to 90°
 Supply voltage: **10 ÷ 30 Vdc**
 IP code: **IP 65**

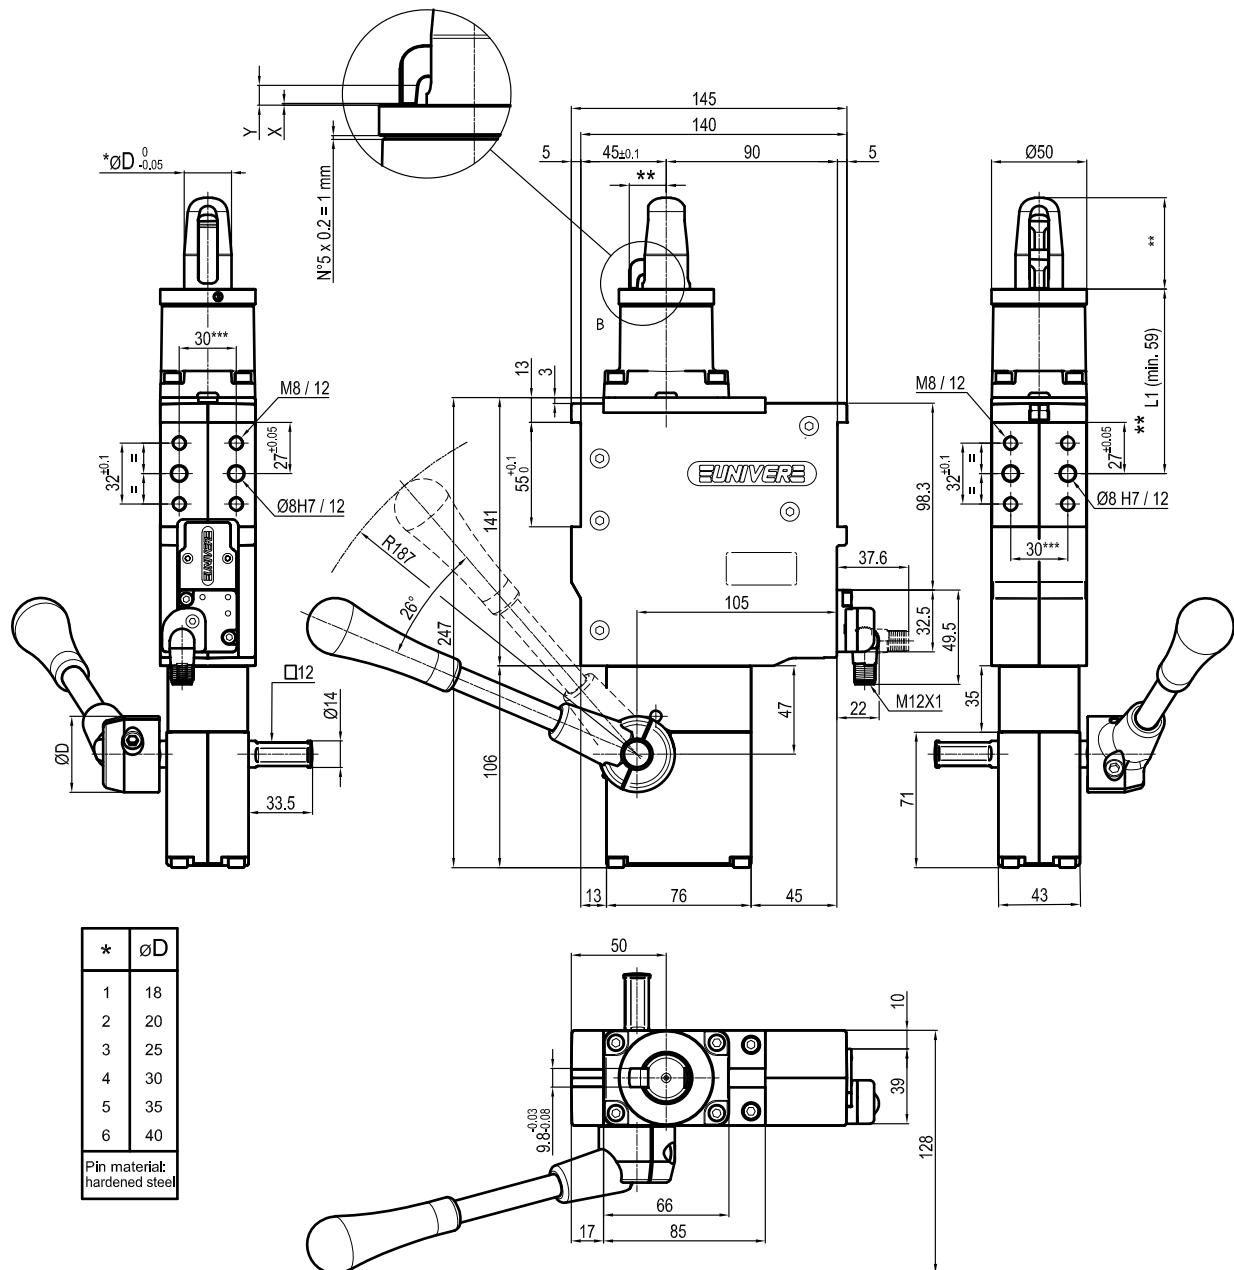
** : MISSING DIMENSION TO BE DEFINED ACCORDING TO CUSTOMER SPECIFICATIONS

*** : TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

X = metal sheet

Y = clamping range (X + 2,3 mm Max)

Subject to technical modifications without notice


USL50J_1___K0
5 7
5 PIN DIAMETER

- 1 = Ø 19 mm
- 2 = Ø 20 mm
- 3 = Ø 25 mm
- 4 = Ø 30 mm
- 5 = Ø 35 mm
- 6 = Ø 40 mm

For pin Ø outside the mentioned range
please contact our Sales Dept.

7 PROGRESSIVE NUMBERING

Progressive numbers for special
products are assigned by the Sales Dept.

Size	Clamping force	Weight with hand lever (reference plate, pin and hook not included)
50	3500 N	3,6 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**
 Operating temperature: **5° ÷ 45° C**
 Electronic sensor with M12 swivel connector, from 0° to 90°
 Supply voltage: **10 ÷ 30 Vdc**
 IP code: **IP 65**

**: MISSING DIMENSION TO BE DEFINED ACCORDING TO CUSTOMER SPECIFICATIONS
 ***: TOLERANCE BETWEEN DOWELS ± 0,02, BETWEEN SCREW HOLES ± 0,1

X = metal sheet

Y = clamping range (X + 2,3 mm Max)

Subject to technical modifications without notice