


## 8 PROGRESSIVE NUMBERING

Progressive numbers for special products are assigned by the Sales Dept.

Min./Max. operating pressure: **0,4 / 0,6 MPa**  
Operating temperature: **5° ÷ 45° C**  
Electronic sensor with M12 swivel connector, from 0° to 90°  
Supply voltage: **10 ÷ 30 Vdc**  
IP code: **IP 65**

Bore Ø	Clamping force	Weight (reference plate, pin and hook not included)
50 mm	4000 N	1,8 Kg

Rev. 00 14.05.21

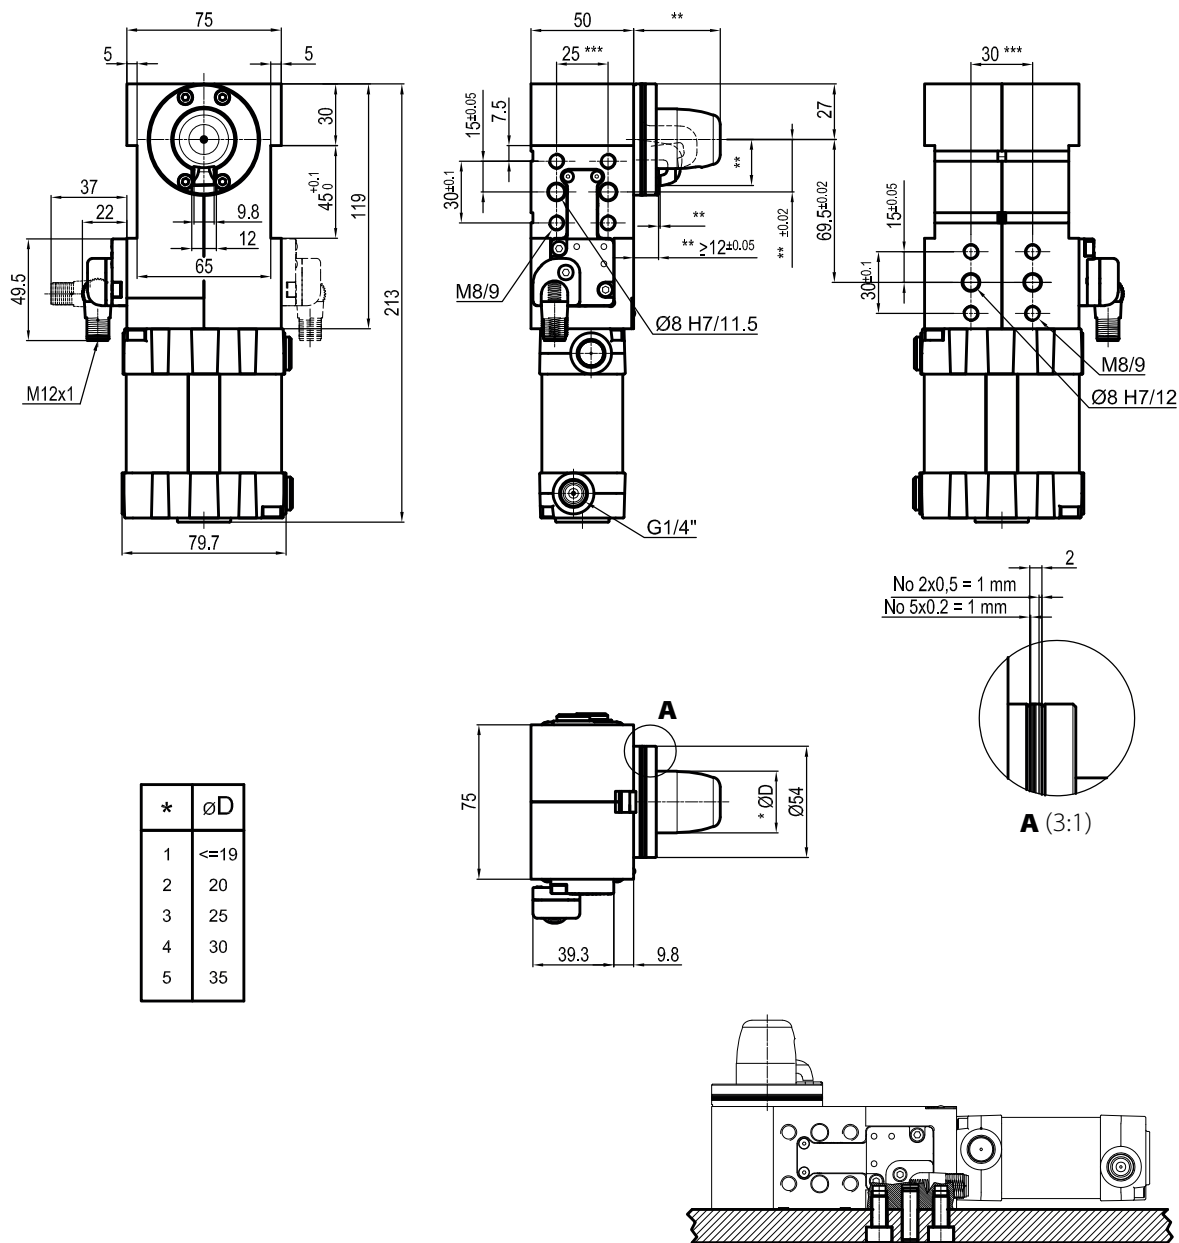

## USP50U\_1\_\_\_K0

### 5 PIN DIAMETER

### 7 SENSOR POSITION

### 8 PROGRESSIVE NUMBERING

5 7 8

- 1 ≤ Ø 19 mm
- 2 = Ø 20 mm
- 3 = Ø 25 mm
- 4 = Ø 30 mm
- 5 = Ø 35 mm
- 6 = Ø 40 mm

For pin Ø outside the mentioned range please contact our Sales Dept.

- L = Left side
- R = Right side

Progressive numbers for special products are assigned by the Sales Dept.

Bore Ø	Clamping force	Weight (reference plate, pin and hook not included)
50 mm	4000 N	1,8 Kg

Min./Max. operating pressure: **0,4 / 0,6 MPa**  
 Operating temperature: **5° ÷ 45° C**  
 Electronic sensor with M12 swivel connector, from 0° to 90°  
 Supply voltage: **10 ÷ 30 Vdc**  
 IP code: **IP 65**

\*\* : MISSING DIMENSION TO BE DEFINED ACCORDING TO CUSTOMER SPECIFICATIONS  
 \*\*\* : TOLERANCE BETWEEN DOWEL HOLES ± 0,02, BETWEEN SCREW HOLES ± 0,1  
 THE SENSOR CAN BE MOUNTED ON EITHER RIGHT OR LEFT SIDE