

# DMS70



Pneumatic power clamps  
conforming to **CNOMO** Standard



D	M	S	0	7	0	M	P	N	E	E	T	N
1		2			3		4	5	6			

<b>1 Series</b> <b>DMS</b> = Pneumatic power clamp conforming to CNOMO Standard	<b>2 Size</b> <b>070</b> = 70 Nm (body 40, cylinder Ø 40mm)	<b>3 Mechanims</b> <b>MP</b> = pneumatic mechanism
<b>4 Brake</b> <b>N</b> = without brake system <b>V</b> = with brake system	<b>5 Sensor/Version</b> <b>S</b> = No sensor <b>E</b> = <b>UNIVERSAL</b> version, with three-wire electronic sensor and stepless adjustment of the opening angle from 45° to 105°	<b>6 Arm</b> <b>ETN</b> = standard arm for horizontal/vertical position <b>NNN</b> = without arm

## UNIVERSAL Power clamp conforming to the CNOMO standard

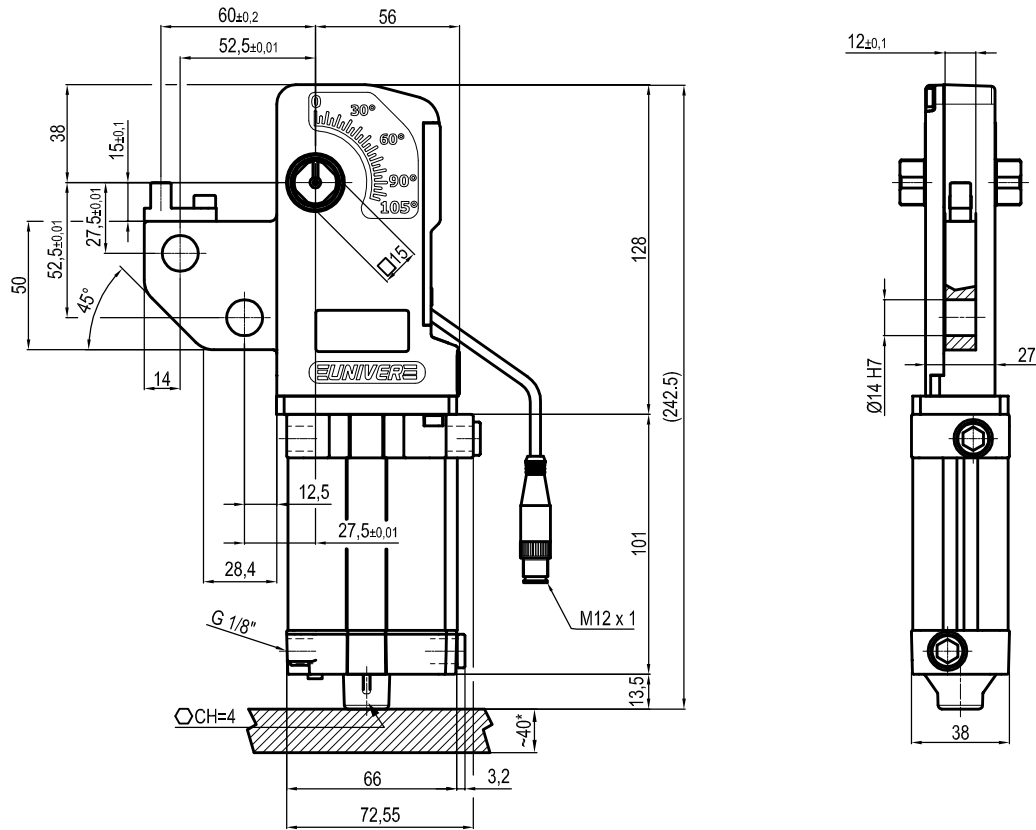


Size	Cylinder	Weight
070	40	1.5 Kg.

Min./Max. operating pressure: **0,4 / 0,6 MPa**  
 Operating temperature: **5° + 45° C**  
 Opening angle: **adjustable**  
 Electronic sensor with M12  
 Supply voltage: 10+30 Vdc  
 IP code: **IP 65**  
 Pneumatic ports on both sides

\* : AREA TO ACCES ANGLE ADJUSTMENT

Subject to technical modifications without notice

## UNIVERSAL Power clamp conforming to the CNOMO standard

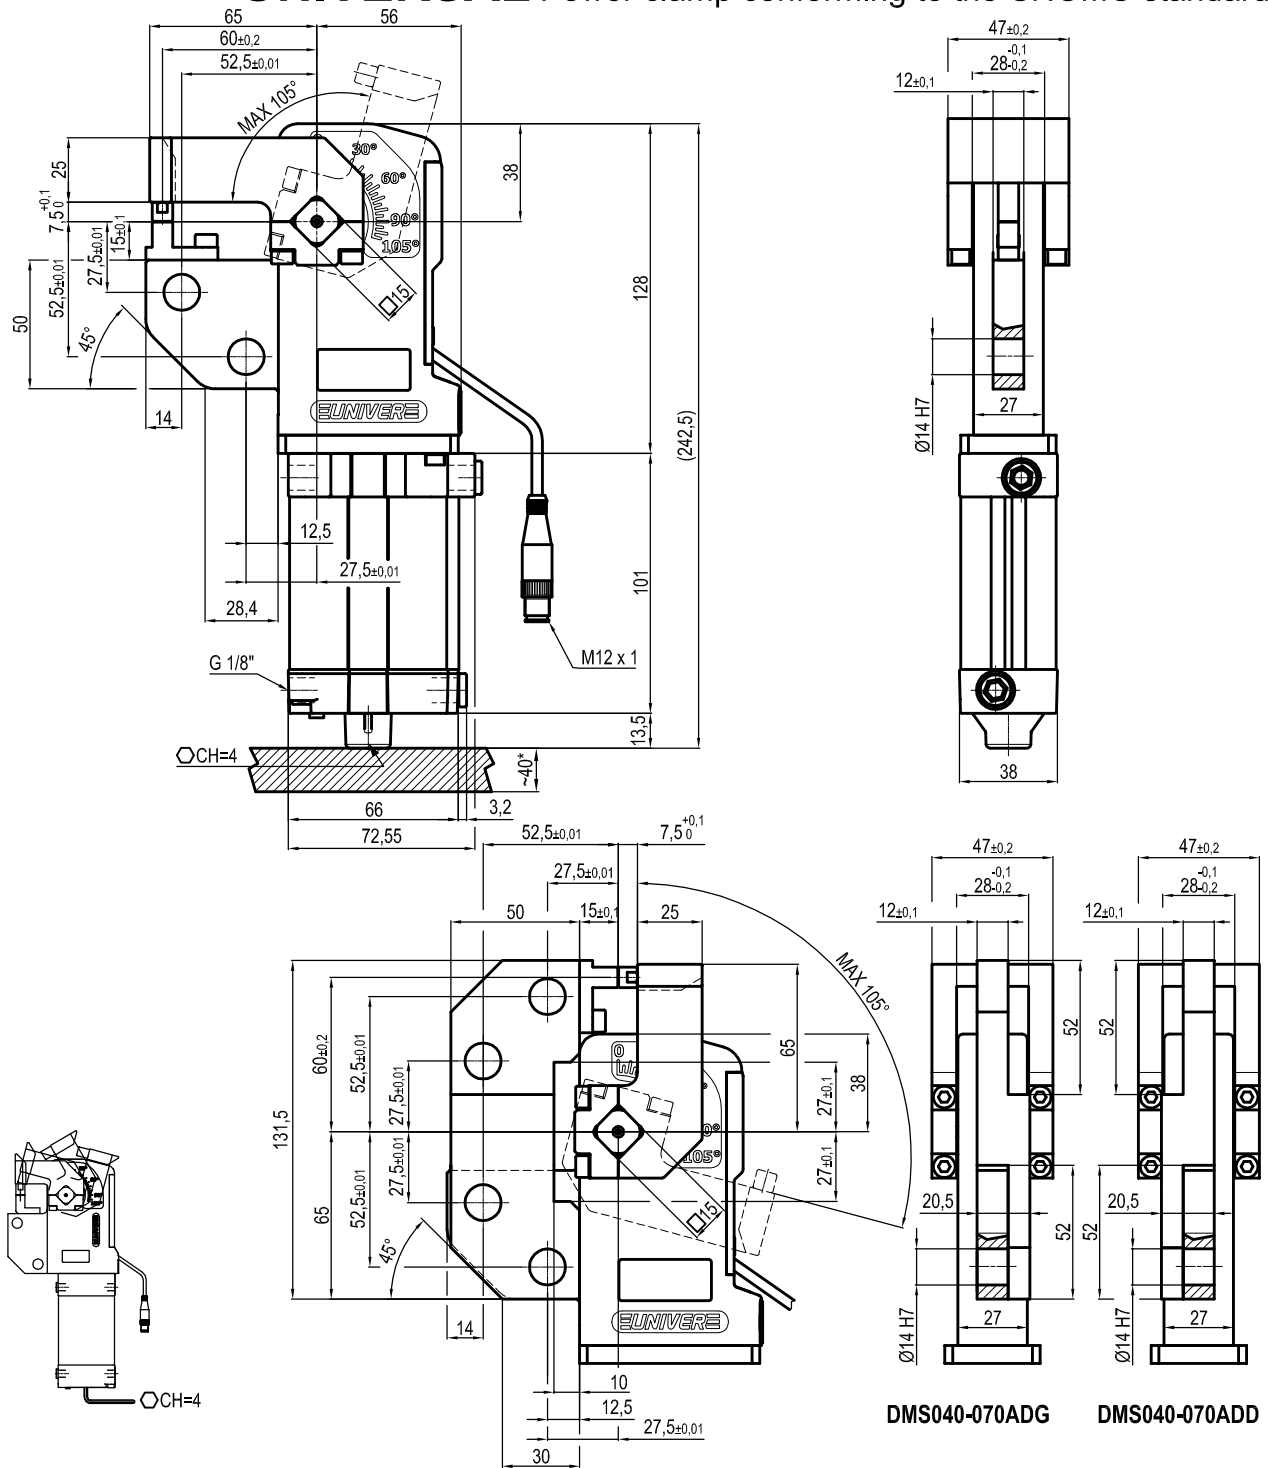

Size	Cylinder	Weight
070	40	1.5 Kg.

Min./Max. operating pressure: **0,4 / 0,6 MPa**  
 Operating temperature: **5° + 45° C**  
 Opening angle: **adjustable from 45° to 105°**  
 Electronic sensor with M12  
 Supply voltage: 10+30 Vdc  
 IP code: **IP 65**  
 Pneumatic ports on both sides

\* : AREA TO ACCES ANGLE ADJUSTMENT

Subject to technical modifications without notice