


Filetto
M8X1 - M10X1
M14X1,5 - M20X1,5

Temperature
- 10°C
+ 70 °C

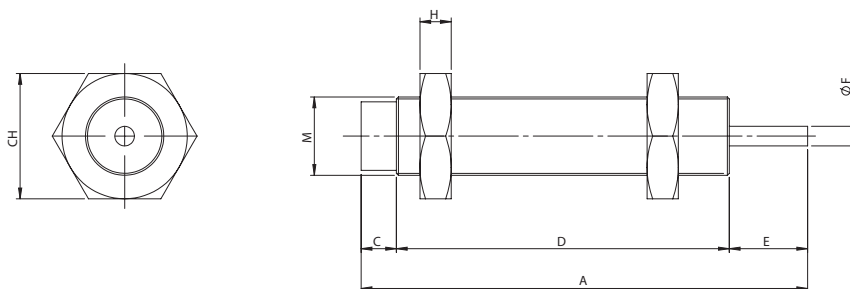
Corse Standard
6 - 8 - 15 - 20 mm

Serie
Filetto
Corse
Velocità
Varianti
S H
0 0 8
0 0 0 6
2
C
SH Deceleratore

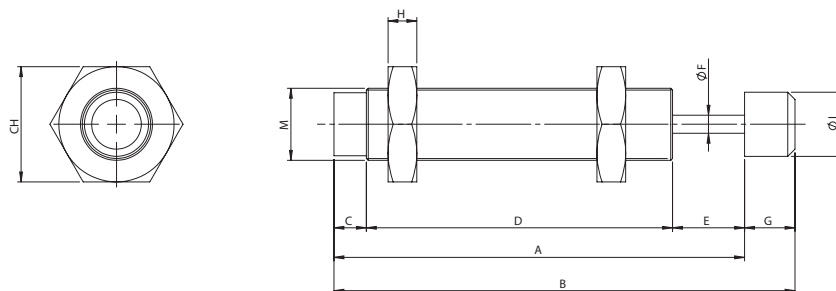
008 = M8x1
010 = M10x1
014 = M14x1,5
020 = M20x1,5

0006
0008
0015
0020
2 Standard

C = Senza Cappuccio
C = Con Cappuccio

SERIE SH
SH - DECELERATORI SENZA CAPPUCCIO


Code	M	Corsa	Velocità massima d'impatto (m/s)	A	C	D	E	F	CH	H
SH 008 0006 2	M8x1	6	1,2	46,5	5	35,5	6	2,8	11	3
SH 010 0008 2	M10x1	8	1,5	53,5	5	40,5	8	3	13	3
SH 014 0015 2	M14x1,5	15	1,5	90	8	67	15	3,5	19	6
SH 020 0020 2	M20x1,5	20	2	114	9	85	20	5	26	8

SH C - DECELERATORI CON CAPPUCCIO


Code	M	Corsa	Velocità massima d'impatto (m/s)	A	B	C	D	E	F	G	I	CH	H
SH 008 0006 2 C	M8x1	6	1,2	46,5	55	5	35,5	6	2,8	8,5	6,5	11	3
SH 010 0008 2 C	M10x1	8	1,5	53,5	62	5	40,5	8	3	8,5	8,5	13	3
SH 014 0015 2 C	M14x1,5	15	1,5	90	102	8	67	15	3,5	12	12,2	19	6
SH 020 0020 2 C	M20x1,5	20	2	114	128	9	85	20	5	14	17,8	26	8