## UNICLAMP





Pneumatic power pivot 600 Nm with brake

Pneumatic power pivot with brake typically used to rotate and dump fixtures and parts in a desired position.

- · High repeatability
- · Mechanical stops
- · Integrated flow control system
- · Double pneumatic cushioning
- Fixing ports on 4 sides
- · Tapered roller bearings to support heavy load
- · Orientable table in 4 pre-set positions
- · Version with sensor on the brake available

# CHARACTERISTICS

Operating temperature	5° ÷ 45° C
Min./Max. Operating pressure	0,4 / 0,6 MPa
Bore Ø	200 mm
Pivot rotation	45°/60°/90°/120°
Holding moment	8000 Nm
Max. torque at rotary table (0,55MPa)	600 Nm
Weight	59,9 kg
Pneumatic supply ports	G3/4
Body sensor	electronic (optical)
Brake sensor	electronic
Supply voltage	10 ÷ 30 Vdc
IP code	IP 65

#### **CODIFICATION KEY**



FLOW CONTROL SYSTEM



HIGH REPEATABILITY

- UAG | P | 605 | O | A | 090 | B | S | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8
- SERIES
  UAG = UNICLAMP Power pivot
- VERSION
  P = Pneumatic
- 3 SIZE
- 605 = 600 Nm Ø 200 mm
- 4 TABLE POSITION
  - O = Horizontal 90°
  - P = Horizontal mirror of "O"\*
  - V = Vertical 180°
  - Z = Vertical mirror of "V"
  - \*Max opening angle 60°

### 5 SENSOR

- N = No sensor (with protection plate)
- K = Electronic sensor PNP, M12 (DF-K)
- $\mathbf{Y} = \mathsf{Electronic}$  sensor PNP, M12 (DF-Y) white LED
- J = Electronic sensor NPN, M12 (DF-J)
- A = Electronic sensor PNP, optical for opening angle, M12 (DF-K) + brake sensor (DF-S)

# 6 PIVOT ROTATION

9 10

**120** = 120°

**090** = 90°

**060** = 60°

**045** = 45°

1

#### 7 BRAKE SYSTEM

- B = With brake
- $\mathbf{M}=$  With brake and manual unlock

#### CONNECTIONS

- S = Left side (Standard)
- D = Right side
- **F** = Front side
- $\mathbf{P}=\text{Rear side}$



#### 9 PRODUCT REVISION

Assigned by UNIVER


# 10 ATEX

X = ATEX option


See ATEX Catalogue for types and versions



# O Horizontal 90°

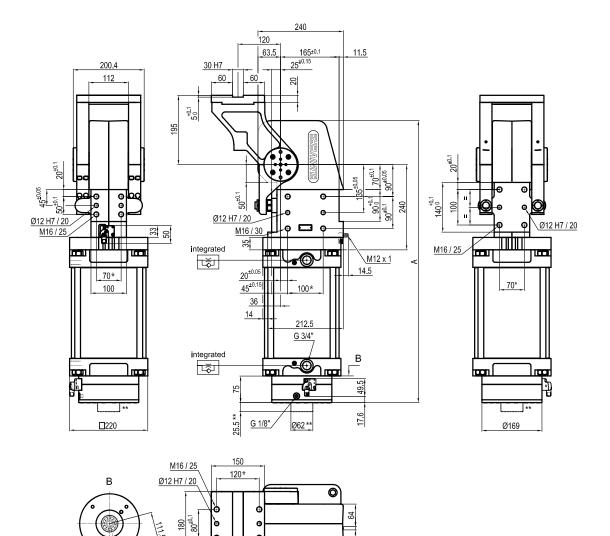

0



Pivot rotation (°)	Α
45°	702
60°	718
90°	755
120°	794

# Sensors





Electronic (optical)


Electronic

DF-K PNP M12 DF-J NPN M12 DF-Y PNP M12 White LED **DF-S** PNP M12


<sup>\*</sup>TOLERANCE BETWEEN DOWELS  $\pm$  0,02 BETWEEN SCREW HOLES  $\pm$  0,1 \*\*VERSION WITH BRAKE UNLOCK "M"



P | Horizontal Mirror of "O" position



Vertical 180°



**Z** | Vertical Mirror of "V" position

