










CHARACTERISTICS

Ambient temperature	-10 ÷ +45 °C
Fluid	50 µm filtered air, with or without lubrication
Commutation system	spool
Max pressure	10 bar
Nominal bore (mm)	6
Nominal flow rate (NI/min)	860
Connector	G1/8
Valve body	zamak
Seals	NBR
Spool	aluminium
Electropilot/Coil	AA series/U1-U3
Power consumption	3,5 W (DC), 5 VA (AC)
Connector	AM-5110
Voltage	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC
Manual override	impulse screw – 2 positions

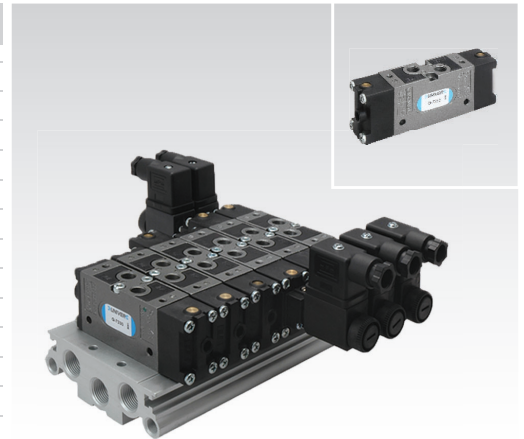


Available ATEX version upon request
CE Ex II 2Gc IICT5 II 2Dc T100°C

Pneumatic impulse

<p>■ Single impulse</p>   G-7230  G-7231	<p>■ Double impulse</p>   G-7233  G-7333  G-7433  G-7533
--	---

Electrical impulse

<p>■ Single impulse</p>   G-7290  G-7291	<p>■ Double impulse</p>   G-7299  G-7399  G-7499  G-7599
--	---


The valve is supplied with two plugs to be fixed with sealants on unused connections 2-4
 Solenoid valves are supplied without coil/connector/locking nut
 See ATEX Catalogue for types and versions

Multiple sub-base G1/8



	Places		Places
G-7900-02	2	G-7900-08	8
G-7900-03	3	G-7900-09	9
G-7900-04	4	G-7900-10	10
G-7900-05	5	G-7900-11	11
G-7900-06	6	G-7900-12	12
G-7900-07	7		




Threaded connections 2 - 4 on both sides of the valve

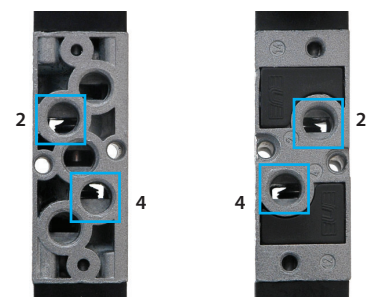

G-7885

AM-5151

AM-5152



Closing plate for sub-base place

Angle plate for "H" solenoid option

Angle plate for "P" solenoid option